


ACCESSORIES (SOLD SEPARATELY)	
DESCRIPTION	CATALOG NO.
U-DIE HOLDER SET	PT50024685
W-DIE HOLDER SET	PT50024683


REV.	DATE	DESCRIPTION	ECO	BY	C'H'K.
B	01/02/2014 00:00:00 AM	DRAWING RELEASED	34307	TRF	BV

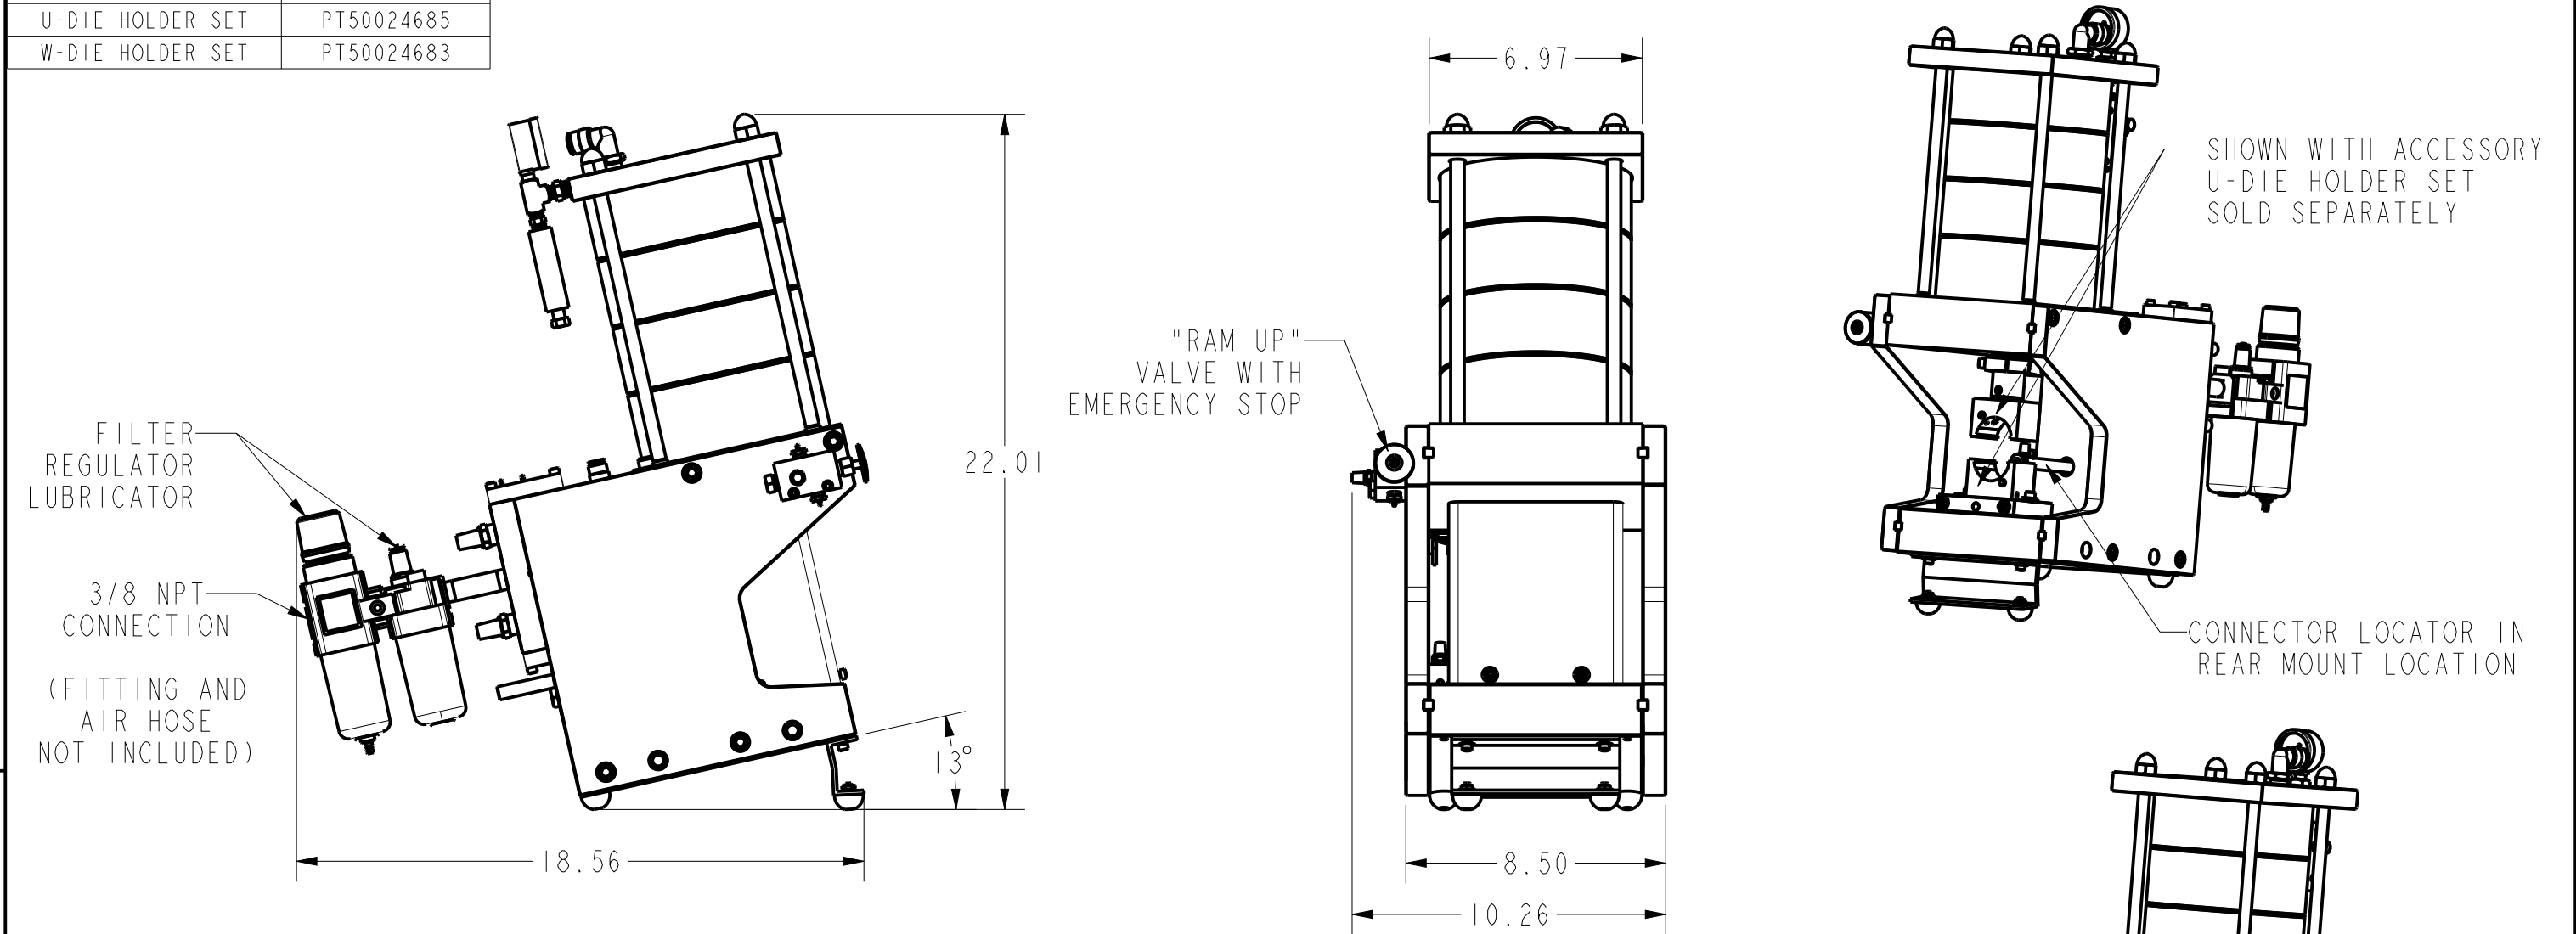

OEM840NCP SPECIFICATIONS
 WEIGHT: 61 LBS (EST. BASE TOOL)
 OPERATING PRESSURE: 90-100 PSI
 RAM TRAVEL: 1.125 INCH
 OUTPUT: 4.5 TONS

FEATURES & BENEFITS:

- ONE STEP FOOT ACTIVATED CRIMP - LEAVES HANDS FREE TO INSERT CONNECTOR INTO PRESS
- PRESSURE REGULATED - CONTROLS CRIMP FORCE
- LOW LIMIT PRESSURE REGULATED SWITCH - PRESS WILL NOT COMPLETE IT'S CYCLE WHEN SUPPLY PRESSURE IS LOW
- ROBUST DESIGN - HIGHLY RELIABLE WITH VERY LOW MAINTENANCE
- FRONT SAFETY GUARD WITH SWITCH INTERLOCK - SAFE OPERATION OF TOOL FOR USER
- L-SHAPED RISER BRACKET - OPTIONAL FEEDING ANGLE AND CAN BE SECURED TO BENCH TOP
- USES BURNDY® W-DIES - ACCOMODATES CONNECTOR SIZES TO 1/0 AWG COPPER WITH W-DIE HOLDERS
- USES BURNDY® U-NEST & INDENTOR DIE - ACCOMODATES CONNECTOR SIZES UP TO 4/0 COPPER
- USES BURNDY® U-DIES - ACCOMODATES CONNECTOR SIZES TO 2 AWG COPPER
- USES BURNDY® U-M (DOUBLE INDENT) DIES - ACCOMODATES CONNECTOR SIZES UP TO 4/0 AWG COPPER
- COUNTER DEVICE - STORES THE NUMBER OF RAM ACTUATIONS

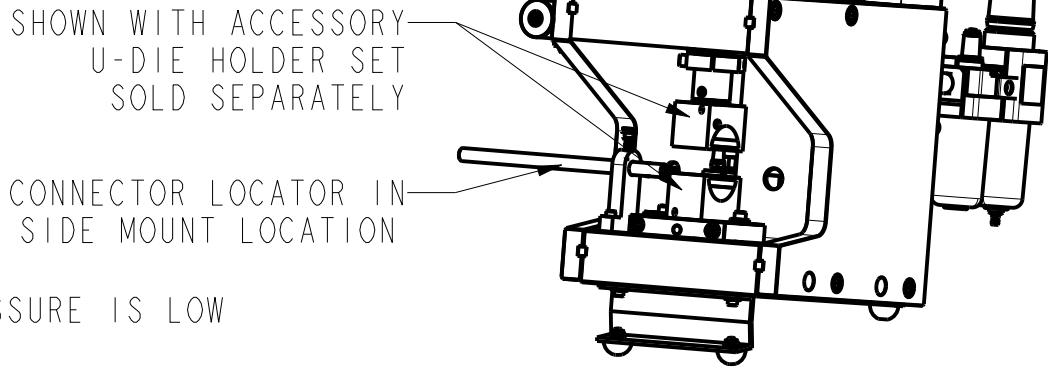

TO ORDER BURNDY® PRODUCTS CALL		PNEUMATIC PRESS, 4.5 TON	
UNITED STATES:		ITEM NO: 50024686	
1-800-346-4175 (LONDONDERRY, NH)		CAT. NO: OEM840NCP	
CANADA:		DRAWN BY: T. FAUCHER 10/23/2013	
1-800-361-6975 (QUEBEC)		CHECKER: B. VACHON 10/23/2013	
1-800-387-6487 (ALL OTHER PROVINCES)		DSN APPVL: J. LEFAVOUR 11/12/2013	
FOR PRODUCT INFO: http://www.burndy.com		MFG APPVL: S. HOPPS 11/12/2013	
		QA APPVL: C. LINDQUIST 11/12/2013	
		MKT APPVL: R. PIOTROWSKI 11/12/2013	
		SCALE: 1:1	
		PROD FAM: TOOLS, PNEUMATIC	
		PROJECT #: 14508	
		SIZE	
		DRAWING NO	
		50024706	
		REV	
		B	
		SHEET 1 OF 1	