

**Cost-effective LCD projector captures attention in classrooms or conference rooms with dynamic images and 3,000 ANSI lumens.**



## Key Features

- WXGA 1280 x 800 resolution
- 3,000 ANSI lumens white/color output
- 16W audio output
- 2,000:1 contrast ratio
- HDMI x 1 input
- 10,000 hours lamp life (Eco-2 mode)\*
- 5,000 hours unwoven filter\*\*

From the classroom to the conference room, Hitachi's cost-effective CP-EW302N LCD projector combines superior image clarity, high quality value, and long-life reliability. Bright, vivid colors with razor-sharp text and bold graphics will truly enhance any lesson or meeting and make it more memorable. For added security, the CP-EW302N includes PIN lock protection which can limit projector users. An MS-1WL wireless multifunction switcher is available for the CP-EW302N and operates in conjunction with the receiver to provide expanded source selection and switching options for connected devices. Plus, Hitachi's Intelligent Eco Mode with ImageCare combines optimal picture performance with maximum energy savings for a lower total cost of ownership. For added peace of mind, Hitachi's CP-EW302N is also backed by a generous warranty and our world-class service and support programs.

# CP-EW302N

**1.800.HITACHI**  
**dmd.info@hal.hitachi.com**  
**hitachi-america.us/projectors**



## FEATURES

### ImageCare Technology

**ImageCare** ImageCare is a lamp power control function that combines optimal picture performance with maximum energy savings by decreasing energy usage, improving contrast ratio and lengthening lamp life. The result is a lower total cost of ownership and decreased maintenance cost.

### Intelligent Eco and Saver Modes



Automatically changes the brightness of the lamp according to the brightness level of the screen. Also, automatically changes the brightness of the lamp if there is no change in the screen image. Using ImageCare technology, these features give optimal picture performance with maximum energy savings.

### PIN Lock / MyScreen / MyText



PIN lock protection can limit projector users. MyScreen PIN lock keeps captured images on the startup screen. Users can set any name logo to MyScreen, clearly identifying ownership. MyText provides the ability to write text on the startup screen such as model name, serial number or location.

### Network Control, Maintenance and Security



Embedded networking gives you the ability to manage and control multiple projectors over your LAN. Features include scheduling of events, centralized reporting, and e-mail alerts for reactive and routine maintenance.



Front View



Top View




Left Profile



Right Profile

## Input/Outputs

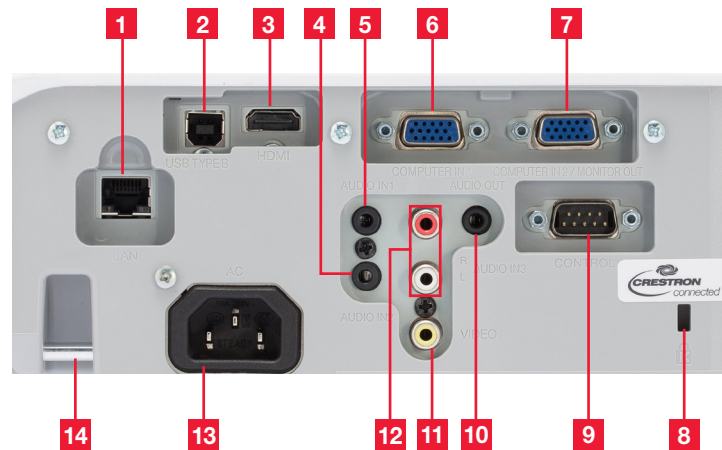

- |               |                              |                  |
|---------------|------------------------------|------------------|
| 1. LAN        | 6. Computer in 1             | 11. Video        |
| 2. USB Type B | 7. Computer in 2/Monitor Out | 12. Audio in 3   |
| 3. HDMI       | 8. Kensington Lock           | 13. AC           |
| 4. Audio in 2 | 9. Control (RS-232C)         | 14. Security Bar |
| 5. Audio in 1 | 10. Audio Out                |                  |

# CP-EW302N

H10510-Rev.1-11/16  
All specifications subject to change without notice.  
3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.  
©2016 Hitachi America, Ltd. All Rights Reserved.

## Accessories and Lenses

<b>Supplied Accessories</b>	Remote control, power cord, computer cable, 2 AA batteries, user's manual CD, user's manual
<b>Optional Accessories</b>	N/A
<b>Optional Lenses</b>	NA
<b>Replacement Parts</b>	
<b>Lamp</b>	DT01481 with filter
<b>Remote Control</b>	HL03031
<b>Filter</b>	UX38841

## Projection Throw Chart

Screen Size 16:10		Throw Distance	
Diagonal	Width	Min	Max
30	25	36	44
60	51	74	89
80	68	99	120
100	85	125	150
200	170	251	302
300	254	378	454

Throw Ratio: 1.5 - 1.8 : 1 (distance : width)  
Screen size and throw distance are measured in inches.

## Specifications

Display	<b>Projection Technology</b>	3LCD, 3 chip technology
	<b>Resolution</b>	WXGA - 1280 x 800
	<b>White Light Output</b>	3,000 ANSI lumens
	<b>Color Light Output</b>	3,000 ANSI lumens
	<b>Colors</b>	16.7 million colors
	<b>Aspect Ratio</b>	Native 16:10 and 4:3 / 14:9 / 16:9 compatible
	<b>Contrast Ratio</b>	2,000 : 1 (using active IRIS)
Lens & Operation	<b>Throw Ratio</b> (distance : width)	1.5 - 1.8 : 1
	<b>Focus Distance</b>	35" - 453"
	<b>Display size</b>	30" - 300"
	<b>Lens</b>	f = 19 - 23 mm, x 1.2 manual zoom and focus
	<b>Lamp Wattage</b>	225W
	<b>Expected Lamp Life*</b>	Approximately 5,000 hours (standard mode) 10,000 hours (Eco-2 mode)
	<b>Expected Filter Life**</b>	Approximately 5,000 hours
Compatibility	<b>Speaker Output</b>	16W
	<b>Keystone</b>	V: +/- 30°
	<b>Computer</b>	VGA, SVGA, XGA, WXGA WXGA+/SXGA/SXGA+/UXGA (compressed) MAC 16"
	<b>H-Sync</b>	15 kHz - 106 kHz
	<b>V-Sync</b>	50 Hz - 120 Hz
	<b>Composite Video</b>	NTSC, NTSC4.43, PAL, PAL-M, -N, SECAM
	<b>Component Video</b>	480i, 480p, 576i, 720p, 1080i, 1080p
Connectors	<b>HDMI</b>	480i, 480p, 576i, 720p, 1080i, 1080p, Computer signal TMDS clock 27 MHz - 162 MHz
	<b>Digital Input</b>	HDMI x 1 (HDCP compliant)
	<b>Computer Input 1</b>	15-pin mini D-sub x 1 (shared with analog component video input)
	<b>Computer Input 2</b>	15-pin mini D-sub x 1 (shared with analog component video input and monitor output)
	<b>Computer Monitor Output</b>	15-pin mini D-sub x 1 (shared with analog computer input 2 and analog component video input)
	<b>Video Input</b>	
	Composite Video	RCA jack x 1
	Component Video	15-pin mini D-sub x 2 (shared with computer in 1, in 2/monitor out)
	<b>Audio Input</b>	3.5 mm stereo mini jack x 2, RCA jack (L/R) x 1
	<b>Audio Output</b>	3.5 mm stereo mini jack x 1
	<b>Network LAN Wired</b>	RJ-45 port
	<b>Network LAN Wireless</b>	N/A
	<b>USB</b>	Type B x 1 (mouse control)
	<b>Control Terminals</b>	9-pin D-sub x 1 (RS-232 control)
Ratings & Warranty	<b>Power Supply</b>	AC100-120V / AC220-240V, 50/60Hz
	<b>Power Consumption</b>	330W / 310W
	<b>Operating Temperature</b>	41°F - 95°F (5°C - 35°C)
	<b>Dimensions (W x D x H)</b>	12.6" x 9.7" x 3.4" (excluding protruding parts)
	<b>Weight</b>	Approximately 6.8 lbs.
	<b>Approvals</b>	UL 60950-1 / cUL FCC Part 15 subpart B class B
	<b>Warranty</b>	3 year limited parts and labor Extended Service Contract available (additional cost)

\* Actual lamp life will vary by individual lamp based on environmental conditions, selected operating mode, user settings and usage. Hours of expected lamp life specified are not guaranteed and do not constitute part of the product or lamp warranty. Lamp brightness decreases over time.

\*\* Actual filter life will vary by individual filter based on environmental conditions, selected operating mode, user settings and usage. Hours of expected filter life specified are not guaranteed and do not constitute part of the product warranty.



HI0510-Rev.1-11/16

All specifications subject to change without notice.

3LCD and the 3LCD logo are registered trademarks of the Seiko Epson Corporation.  
©2016 Hitachi America, Ltd. All Rights Reserved.

**Hitachi America, Ltd.**

Toll Free: 1.800.HITACHI • Email: [dmd.info@hal.hitachi.com](mailto:dmd.info@hal.hitachi.com)

Web: [hitachi-america.us/projectors](http://hitachi-america.us/projectors)

