


Technical specifications of the Ultra Short Throw Series at a glance:		XJ-UT352W	XJ-UT352WN	XJ-UT312WN
Display	Technology: Resolution: Brightness:	3,500	0.65" DLP® chip (WXGA) 1,280 x 800 pixels (WXGA) lumens	3,100 lumens
Illumination technology	Type: Service life:	Laser and LED Hybrid Technology up to 20,000 hours		
Picture	Contrast: Colour depth:	20,000:1 up to 1.07 billion (full colour)		
Projection lens	Technology: Projection ratio (viewing distance: width): Offset: Focus:	Fixed zoom/mirror system 0.28:1 70 % Manual		
Projection	Size of the projection screen:	50" (1.27 m) to 110" (2.79 m)		
Keystone correction	Horizontal/vertical (manual):	±5°		
Interfaces	Computer: Digital input: Component video: Audio:	2x RGB port (RGB 15 pin mini D-sub (VGA)) 2x HDMI type A 1x HDMI type A RCA (composite), S-Video Input terminal: 1x RCA (R/L), 2x 3.5 mm stereo mini jack, Output terminal: 1x 3.5 mm stereo mini jack		
	Microphone: USB: Logo port:	USB type A ¹	3.5 mm monaural mini jack USB type A via Mini USB	·
	Wireless connections:	-	Optional: CASIO Wireless LAN Adapter (YW-41)	CASIO Wireless LAN Adapter (YW-41) is included
	Plug-in USB devices¹:	-	USB memory stick, CASIO selected CASIO graphing calcula digital cameras	tor/electronic dictionaries and
Extended functions		Direct power on, direct power off, rear projection, freeze, blank screen, ceiling mounting		
Outputs	Audio: RGB output:	3.5 mm variable audio mini stereo RGB Mini 15 pin D-Sub		
Audio system		16 W monaural speaker		
Control system	Control inputs: LAN: Compatible control systems:	RS-232 (Mini D-sub 9 pin) RJ-45 Crestron, AMX, Extron, SP Controls		
Operating noise	Eco 1/Normal:	28–37 dB		
Energy consumption	Light Control On (Light Output 1–7): Light Control Off (Normal/Bright): Standby:		-185 W -225 W 0.23 W	90–160 W 170–195 W
Computer compatibility	Max. resolution (compressed):	1,920 x 1,200 Pixel (WUXGA)		
Video compatibility	Norms: Signals:	PAL-N/-M, PAL60, SECAM, NTSC YCbCr/YPbPr		
Included with accessories	IR remote control: Other:	YT-160 Batteries (2x AAA), mains cable,	YT-1 RGB cable, warranty card, quick guide	
Optional accessories	Ceiling mounting:	YM-81 (4x M4/10 mm)		
General	Dimensions (W x H x D): Weight: Operating temperature: Warranty:	Cover included: 413 x 153 x 333 mm / Cover not included: 338 x 153 x 333 mm 5.7 kg 5–35 °C 1. When used for less than 12 hours per day: Projector: three years Light source: five years or 10,000 hours ⁴		
		2. When used continuously for more than 12 hours per day Projector: two years Light source: two years or 6,000 hours ⁴		
Educational Solutions		Custom Templates, Auto Projection Off, Auto Input Search, Countdown Timer Function, Mirror Mode 1-Click Connection, Control from anywhere, Moderator Function, Custom Templates, Auto Projection Off, Auto Input Search, Countdown Timer Function, Mirror Mode		







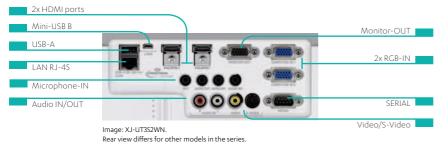




The DLP® logo is a registered trademark of Texas Instruments.



High-Definition Multimedia Interface is a trademark or registered trademark of HDMI Licensing, LLC.



¹ Only power supply.

² Function can only be guaranteed for specified CASIO products. More detailed information on supported USB memory sticks is available on the CASIO website.

³ Applies only for model XJ-UT312WN.

⁴ Whichever is reached first. When used for less than 12 hours per day.