

## INSTRUCTION MANUAL

# TEMPERATURE PROBE S 2031/150 Pt 1000/3850

The temperature probe with a cable for contact temperature measurements of smooth and plane surface ranging from -30 to 150 °C



Instruction Manual in Czech language is available here: [www.cometsystem.cz/sondy.htm](http://www.cometsystem.cz/sondy.htm), or can be obtained from your supplier.

Manuál v českém jazyce je dostupný zde: [www.cometsystem.cz/sondy.htm](http://www.cometsystem.cz/sondy.htm), případně na vyžádání u svého dodavatele.

**SENSIT s.r.o.**

Školní 2610, 756 61 Rožnov pod Radhoštěm, ID No. 64087484, VAT No. CZ64087484, Phone: +420 571 625 571, Fax: +420 571 625 572  
Company is incorporated in the Companies Register at the Regional Court in Ostrava, Section C, File 13728, [sensit@sensit.cz](mailto:sensit@sensit.cz), [www.sensit.cz](http://www.sensit.cz)



4055.4	09.14
Supersede	4055.3

## Legal regulations and standards:

- Laws, regulations and technical standards referring to occupational safety must be followed during installation.
- Electrical connection of the detector may only be carried out by a competent person with electrician qualification who is familiarized with the "Instruction Manual" in detail.
- The Instruction Manual is part of the product and it is necessary to keep it for the entire service life of the product.
- The Instruction Manual must be transferred to any other owner or user of the product.
- The disposal must be performed in compliance with the Directive 2008/98/ES of the European Parliament and of the Council - on waste and the Directive 2012/19/ES of the European Parliament and of the Council – on waste electrical and electronic equipment (WEEE).
- The probes are delivered in packages, which guarantee resistance to mechanical influences and that meet the conditions with the European Parliament and Council Directive 94/62/ES on packaging and packaging waste.
- All SENSIT s.r.o. products are checked for their function and the compliance with their specifications usually by comparison with reference measuring instruments. These reference instruments are traceable to the Czech national standards and the measurement uncertainty is considered for the measuring processes.

## Application:

The temperature probes S 2031/150 are designed for contact temperature measurements of smooth and plane surface of solids. The temperature range for application of the probe is – 30°C to 150 °C and it must not be exceeded even for a short term. The probes may be used for all control systems compatible with the Pt 1000 temperature sensor with a temperature coefficient of 3850 ppm / °C. They meet the ingress protection IP43 according to the EN 60 529 standard and are suitable for temperature measurement in chemically non-aggressive environments.

### Recommended use and location of probes:

- It is recommended to prepare the measured surface to be as flat and smooth as possible and free of surface contaminants
- Operating position is arbitrary, probe must be attached to the surface perpendicularly and is necessary to ensure contact over the whole surface of the brass housing
- Once the probe is applied to the measured surface, it must not be moved or turned under pressure.

## Warnings and restrictions:

### The probes must not be used for measuring in locations:

- Where the specified technical parameters and operating conditions are not adhered
- Where the probe is exposed to mechanical action
- With explosion hazard (the supply cable is not resistant to flame propagation)
- For measuring temperatures of subjects under voltage
- With chemically aggressive environment that does not correspond the used metal and plastic materials
- Where the probe is exposed to flooding, immersion to liquid or to splashing liquid

### It is not suitable to use the probes for measuring temperature in locations:

- Where exposure to direct heat radiation from surroundings or to sunlight may occur
- Where the measured surface is not flat and its roughness does not provide a sufficient contact with the measured surface - Rough dirt must not be in the area between contact housing and a protective cap.
- Where the supply cable might run parallel to mains cables (risk of interference signal induction and the measurement results may be influenced), the safe distance from mains power cables when cables run parallel can be as much as 0,5 m according to the nature of interfering fields.
- Where the probe might be exposed to effects of strong organic and inorganic acids with medium and strong concentrations at high temperatures, weak organic acids with high concentrations and high temperatures, chlorinated hydrocarbons, and undiluted alkaline substances.

Failure to follow the said recommendations will negatively affect measurement accuracy, reliability and service life of the temperature probe.

## Declaration of conformity

SENSIT s.r.o. provides the product with the EU/CE Declaration of Conformity issued according to Act No. 22/1997 Coll., as subsequently amended. The product is in accordance with the following directives:

- European Parliament and Council Directive 2011/65/EU of 8 June 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment

Product safety and technical parameters were evaluated according to the following standards and norms, as amended:

- EN 60751, EN 60529, EN 60730-1, EN 60730-2-9


## Probe description:

The probe consists of a metallic housing in the form of a dish with the sensing element inside, of a metallic extension tube, of a plastic grip and a supply cable. The sensor housing is made of brass and it is located in a protective rubber cap. The sensor element is partially isolated from the ambient influence temperature and environment. The total length of housing with extension tube is 70 mm. The probes are connected as two-wire probes. The supply cable has external silicone insulation and is shielded. The shielding is not connected with the housing or with the temperature element.

## Sensor installation:

1. Connect the wires of the supply cable to the evaluation unit according the wiring diagram. **The supply cable shielding is not conductively connected with the external housing of the sensor or with the temperature element.** They can be used those possible options of connection:
  - connect the wires of the supply cable direct into terminals of measuring device
  - to the wires of supply cable connect different variants of connectors (JACK, CINCH, ELKA etc.) and then connect the connectors with measuring device
2. After installation and connection to the consequential electrical measuring device, the probe is ready for operation.

## Wiring diagram

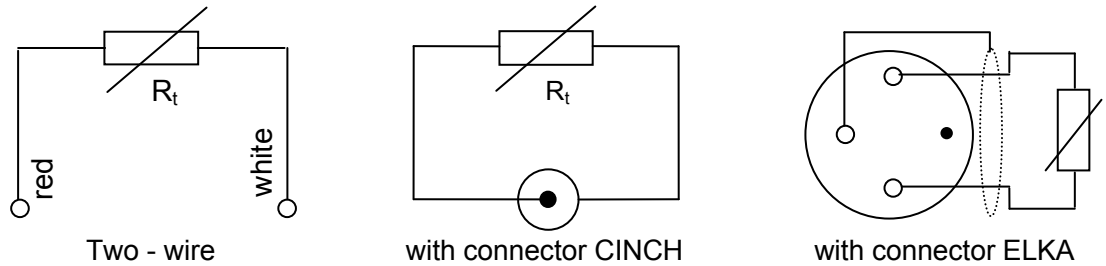

## Technical parameters:

Type of element	Pt 1000 / 3850 ppm / °C
Accuracy class of element *	$\pm (0,15 + 0,002  t )$ in °C
Temperature element wiring	Two-wire configuration
Measuring range	-30 °C to 150 °C
Power supply	SELV or PELV
Max. / recomb. measuring current	1 mA / 0,3 mA
Sensor IP code	IP 43 according to EN 60 529
Response time	$\tau_{0,5} < 10$ sec (on smooth surface without paste)
Housing material	The contact dish            brass Extension tube            stainless steel 1.4301
Material of the protective case	rubber
Housing diameter of the contact dish	$7,0 \pm 0,1$ mm
The total length of housing	70 mm
Dielectric strength	500 VAC according to EN 60730-1
Insulation resistance	$> 200$ M $\Omega$ at 500VDC, $25 \pm 3$ °C
Supply cable type	shielded silicone $2 \times 0,22$ mm <sup>2</sup>
Supply cable length	
Supply leads resistance	$0,162 \Omega / 1$ m at a temperature of 25 °C
Material of the grip	Polypropylene
Length of the grip	45 mm
Weight	0,05 kg / 1 m

\* for two wire connection the influence of the cable resistance must be add to measured value, for example at temperature 25°C must be add the value 0,042 °C / 1m.

## Operating conditions:

- temperature round the supply cable: -30 °C to 150 °C
- relative humidity of the surroundings: 10 to 100 %
- atmospheric pressure: 70 to 106 kPa

## Storage:

- Ambient temperature 5 to 40 °C
- Humidity 5 to 85%

**Delivery:**

Each delivery contains the following unless otherwise agreed by the customer:

- Sensor according to purchase order
- Instruction Manual, including Guarantee Certificate
- Delivery Note

**Complaints and repairs:**

Guarantee and after-guarantee repairs of sensors are ensured by the manufacturer. The product must be delivered including a copy of the Guarantee Certificate, duly packed and fit to shipment so as not to get damaged during transportation.

## **GUARANTEE CERTIFICATE**

**The product is covered by guarantee for 24 months from the date of purchase.**

In this period, the manufacturer will remove all material or manufacturing defects arisen demonstrably during the applicable warranty period. The manufacturer is liable for the technical and operational parameters of the product given in the user manual. Any identified defects will be claimed by the buyer without undue delay after their identification or, as appropriate, after the buyer was able to identify them during his routine care. A completed Warranty Certificate with a brief description of the defect plus the product must be submitted with the claim.

**Warranty does not cover a product:**

- That was damaged during transport and inappropriate storage, improper commissioning and/or that has been used for a purpose other than specified
- That has been used in an improper manner, inconsistent with the user manual and/or generally applicable technical standards or safety regulations
- That is worn or damaged as a result of normal use of the product, without loss of its operational characteristics and guaranteed technical parameters
- Into which unskilled intervention, unauthorised structural or other changes (reprogramming, resetting of set parameters, etc.) have been made
- That is mechanically damaged, e.g. by fall, being hit by a hard object, cleaning with unsuitable agents, power cord tearing/breaking, breaking or other damage of individual product parts
- That has been exposed to adverse external influence, e.g. object intrusion, wrong supply voltage, influence of chemical processes, electrical surge (obviously burnt components or printed circuits), dusty, dirty, aggressive or otherwise unsuitable environment, except normal variation
- That has been damaged by an incidental or natural disaster or as a result of natural or external phenomena, such as storm, fire, water, excessive heat
- That is claimed without the Warranty Certificate or nameplate.

Rights and obligations regarding the rights arising from defective performance will be governed by the applicable legislations and the applicable Business Terms and Conditions of SENSIT s.r.o. and this Warranty Certificate.

**Date of sale confirmation:****Serial number:**