



205 Westwood Ave  
Long Branch, NJ 07740  
1-877-742-TEST (8378)  
Fax: (732) 222-7088  
salesteam@Tequipment.NET

# FLUKE® 80 Series V Multimeters

## Getting Started Manual

PN 2101973

May 2004 Rev.2, 11/08

© 2004, 2008 Fluke Corporation. All rights reserved. Printed in U.S.A.

Specifications are subject to change without notice.

All product names are trademarks of their respective companies.

## Lifetime Limited Warranty

Each Fluke 20, 70, 80, 170 and 180 Series DMM will be free from defects in material and workmanship for its lifetime. As used herein, "lifetime" is defined as seven years after Fluke discontinues manufacturing the product, but the warranty period shall be at least ten years from the date of purchase. This warranty does not cover fuses, disposable batteries, damage from neglect, misuse, contamination, alteration, accident or abnormal conditions of operation or handling, including failures caused by use outside of the product's specifications, or normal wear and tear of mechanical components. This warranty covers the original purchaser only and is not transferable.

For ten years from the date of purchase, this warranty also covers the LCD. Thereafter, for the lifetime of the DMM, Fluke will replace the LCD for a fee based on then current component acquisition costs.

To establish original ownership and prove date of purchase, please complete and return the registration card accompanying the product, or register your product on <http://www.fluke.com>. Fluke will, at its option, repair at no charge, replace or refund the purchase price of a defective product purchased through a Fluke authorized sales outlet and at the applicable international price. Fluke reserves the right to charge for importation costs of repair/replacement parts if the product purchased in one country is sent for repair elsewhere.

If the product is defective, contact your nearest Fluke authorized service center to obtain return authorization information, then send the product to that service center, with a description of the difficulty, postage and insurance prepaid (FOB Destination). Fluke assumes no risk for damage in transit. Fluke will pay return transportation for product repaired or replaced in-warranty. Before making any non-warranty repair, Fluke will estimate cost and obtain authorization, then invoice you for repair and return transportation.

THIS WARRANTY IS YOUR ONLY REMEDY. NO OTHER WARRANTIES, SUCH AS FITNESS FOR A PARTICULAR PURPOSE, ARE EXPRESSED OR IMPLIED. FLUKE SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL OR CONSEQUENTIAL DAMAGES OR LOSSES, INCLUDING LOSS OF DATA, ARISING FROM ANY CAUSE OR THEORY. AUTHORIZED RESELLERS ARE NOT AUTHORIZED TO EXTEND ANY DIFFERENT WARRANTY ON FLUKE'S BEHALF. Since some states do not allow the exclusion or limitation of an implied warranty or of incidental or consequential damages, this limitation of liability may not apply to you. If any provision of this warranty is held invalid or unenforceable by a court or other decision-maker of competent jurisdiction, such holding will not affect the validity or enforceability of any other provision.

Fluke Corporation  
P.O. Box 9090  
Everett WA  
98206-9090

Fluke Europe B.V.  
P.O. Box 1186  
5602 B.D. Eindhoven  
The Netherlands

# ***Table of Contents***

| <b>Title</b>                  | <b>Page</b> |
|-------------------------------|-------------|
| Introduction.....             | 1           |
| Contacting Fluke .....        | 1           |
| Safety Information .....      | 1           |
| The Meter's Features .....    | 4           |
| Power-Up Options .....        | 11          |
| Automatic Power-Off .....     | 11          |
| Input Alert™ Feature .....    | 11          |
| Low Pass Filter (87).....     | 11          |
| Bar Graph.....                | 12          |
| AutoHOLD® Mode .....          | 13          |
| Relative Mode .....           | 13          |
| Maintenance.....              | 13          |
| General Maintenance .....     | 13          |
| Fuse Test .....               | 13          |
| Specifications .....          | 14          |
| Detailed Specifications ..... | 15          |



## ***List of Tables***

| <b>Table</b> | <b>Title</b>                                                         | <b>Page</b> |
|--------------|----------------------------------------------------------------------|-------------|
| 1.           | Electrical Symbols .....                                             | 3           |
| 2.           | Inputs.....                                                          | 4           |
| 3.           | Rotary Switch Positions.....                                         | 5           |
| 4.           | Pushbuttons .....                                                    | 6           |
| 5.           | Display Features.....                                                | 9           |
| 6.           | MIN MAX Functions.....                                               | 12          |
| 7.           | Model 87 AC Voltage Function Specifications.....                     | 15          |
| 8.           | Model 83 AC Voltage Function Specifications.....                     | 16          |
| 9.           | DC Voltage, Resistance, and Conductance Function Specifications..... | 17          |
| 10.          | Temperature Specifications (87 Only) .....                           | 17          |
| 11.          | Current Function Specifications.....                                 | 18          |
| 12.          | Capacitance and Diode Function Specifications.....                   | 19          |
| 13.          | Frequency Counter Specifications.....                                | 19          |
| 14.          | Frequency Counter Sensitivity and Trigger Levels .....               | 20          |
| 15.          | Electrical Characteristics of the Terminals.....                     | 21          |
| 16.          | MIN MAX Recording Specifications.....                                | 21          |

## ***List of Figures***

| <b>Figure</b> | <b>Title</b>                     | <b>Page</b> |
|---------------|----------------------------------|-------------|
| 1.            | Display Features (Model 87)..... | 9           |
| 2.            | Low Pass Filter.....             | 11          |



## **Introduction**

### **Warning**

**Read "Safety Information" before you use the Meter.**

Except where noted, the descriptions and instructions in this manual apply to Series V Models 83 and 87 multimeters (hereafter referred to as "the Meter").

Model 87 appears in all illustrations.

## **Contacting Fluke**

To contact Fluke, call one of the following telephone numbers:

USA: 1-888-44-FLUKE (1-888-443-5853)  
Canada: 1-800-36-FLUKE (1-800-363-5853)  
Europe: +31 402-675-200  
Japan: +81-3-3434-0181  
Singapore: +65-738-5655  
Anywhere in the world: +1-425-446-5500  
USA Service: 1-888-99-FLUKE (1-888-993-5853)

Or, visit Fluke's Web site at [www.fluke.com](http://www.fluke.com).

To register your product, visit [register.fluke.com](http://register.fluke.com)

## **Safety Information**

The Meter complies with:

- EN61010-1:2001
- ANSI/ISA S82.01-2004
- CAN/CSA C22.2 No. 1010.1:2004
- UL610101-1
- Measurement Category III, 1000V, Pollution Degree 2
- Measurement Category IV, 600V, Pollution Degree 2

In this manual, a **Warning** identifies conditions and actions that pose hazards to the user. A **Caution** identifies conditions and actions that may damage the Meter or the equipment under test.

Electrical symbols used on the Meter and in this manual are explained in Table 1.

### **Warning**

**To avoid possible electric shock or personal injury, follow these guidelines:**

- **Use this Meter only as specified in this manual or the protection provided by the Meter might be impaired.**
- **Do not use the Meter if it is damaged. Before you use the Meter, inspect the case. Look for cracks or missing plastic. Pay particular attention to the insulation surrounding the connectors.**
- **Make sure the battery door is closed and latched before operating the Meter.**
- **Replace the battery as soon as the battery indicator () appears.**
- **Remove test leads from the Meter before opening the battery door.**
- **Inspect the test leads for damaged insulation or exposed metal. Check the test leads for continuity. Replace damaged test leads before you use the Meter.**
- **Do not apply more than the rated voltage, as marked on the Meter, between the terminals or between any terminal and earth ground.**

- Never operate the Meter with the cover removed or the case open.
- Use caution when working with voltages above 30 V ac rms, 42 V ac peak, or 60 V dc. These voltages pose a shock hazard.
- Use only the replacement fuses specified by the manual.
- Use the proper terminals, function, and range for measurements.
- Avoid working alone.
- When measuring current, turn off circuit power before connecting the Meter in the circuit. Remember to place the Meter in series with the circuit.
- When making electrical connections, connect the common test lead before connecting the live test lead; when disconnecting, disconnect the live test lead before disconnecting the common test lead.
- Do not use the Meter if it operates abnormally. Protection may be impaired. When in doubt, have the Meter serviced.
- Do not operate the Meter around explosive gas, vapor, or dust.
- Use only a single 9 V battery, properly installed in the Meter case, to power the Meter.
- When servicing the Meter, use only specified replacement parts.

- When using probes, keep fingers behind the finger guards on the probes.
- Do not use the Low Pass Filter option to verify the presence of hazardous voltages. Voltages greater than what is indicated may be present. First, make a voltage measurement without the filter to detect the possible presence of hazardous voltage. Then select the filter function.

**⚠ Caution**

To avoid possible damage to the Meter or to the equipment under test, follow these guidelines:

- Disconnect circuit power and discharge all high-voltage capacitors before testing resistance, continuity, diodes, or capacitance.
- Use the proper terminals, function, and range for all measurements.
- Before measuring current, check the Meter's fuses. (See "Fuse Test" in the Users Manual on the *80 Series V User Manual CD*.)



**Table 1. Electrical Symbols**

|                                                                                   |                                                                                                                                                                                                                                                     |                                                                                   |                                                                                                                                                                                                      |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | AC (Alternating Current)                                                                                                                                                                                                                            |  | Earth ground                                                                                                                                                                                         |
|  | DC (Direct Current)                                                                                                                                                                                                                                 |  | Fuse                                                                                                                                                                                                 |
|  | Hazardous voltage                                                                                                                                                                                                                                   |  | Conforms to European Union directives.                                                                                                                                                               |
|  | Risk of Danger. Important information. See Manual.                                                                                                                                                                                                  |  | Conforms to relevant Canadian Standards Association directives.                                                                                                                                      |
|  | Battery. Low battery when displayed.                                                                                                                                                                                                                |  | Double insulated                                                                                                                                                                                     |
|  | Continuity test or continuity beeper tone.                                                                                                                                                                                                          |  | Capacitance                                                                                                                                                                                          |
| CAT III                                                                           | IEC Overvoltage Category III<br>CAT III equipment is designed to protect against transients in equipment in fixed-equipment installations, such as distribution panels, feeders and short branch circuits, and lighting systems in large buildings. | CAT IV                                                                            | IEC Overvoltage Category IV<br>CAT IV equipment is designed to protect against transients from the primary supply level, such as an electricity meter or an overhead or underground utility service. |
|  | Underwriters Laboratories                                                                                                                                                                                                                           |  | Diode                                                                                                                                                                                                |
|  | Inspected and licensed by TÜV Product Services.                                                                                                                                                                                                     |                                                                                   |                                                                                                                                                                                                      |

## ***The Meter's Features***

Tables 2 through 5 briefly describe the Meter's features.

**Table 2. Inputs**

| <b>Terminal</b>                                                                                                                                                                | <b>Description</b>                                                                                                       |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| A                                                                                                                                                                              | Input for 0 A to 10.00 A current (20 A overload for 30 seconds maximum), current frequency, and duty cycle measurements. |
| mA $\mu$ A                                                                                                                                                                     | Input for 0 $\mu$ A to 400 mA current measurements (600 mA for 18 hrs.) and current frequency and duty cycle.            |
| COM                                                                                                                                                                            | Return terminal for all measurements                                                                                     |
|  V $\Omega$  | Input for voltage, continuity, resistance, diode, capacitance, frequency, temperature (87), and duty cycle measurements. |

**Table 3. Rotary Switch Positions**

| Switch Position                                                                   | Function                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Any Position                                                                      | When the Meter is turned on, the Meter model number briefly appears on the display.                                                                                                                                                                                             |
|  | AC voltage measurement<br>Press  for low pass filter (  ) (87 only).                                          |
|  | DC voltage measurement                                                                                                                                                                                                                                                          |
|  | 600 mV dc voltage range<br>Press  for temperature (  ) (87 only).                                             |
|  | Press  for continuity test.<br><br>$\Omega$ Resistance measurement<br><br>Press  for Capacitance measurement. |
|  | Diode test                                                                                                                                                                                                                                                                      |
|  | AC current measurements from 0 mA to 10.00 A<br>Press  for dc current measurements, from 0 mA to 10.00 A.                                                                                      |
|  | AC current measurements from 0 μA to 6000 μA<br>Press  for dc current measurements from 0 μA to 6000 μA.                                                                                       |

Table 4. Pushbuttons


| Button                                                                                        | Switch Position                                                                                                                                                                                                                                                                                                                                                                                                                                                           | Function                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br>(Yellow) | <br> $mV$<br> $V$<br> $A$<br> $A$<br><b>Power-up</b> | <p>Selects capacitance</p> <p>Selects temperature (87 only)</p> <p>Selects ac low pass filter function (87 only)</p> <p>Switches between dc and ac current</p> <p>Switches between dc and ac current</p> <p>Disables automatic power-off feature (Meter normally powers off in 30 minutes). The Meter reads "Poff" until  is released.</p> |
|              | Any switch position<br><b>Power-up</b>                                                                                                                                                                                                                                                                                                                                                                                                                                    | <p>Starts recording of minimum and maximum values. Steps the display through MAX, MIN, AVG (average), and present readings. Cancels MIN MAX (hold for 1 second).</p> <p>Enables the Meter's calibration mode and prompts for a password. The Meter reads "CAL" and enters calibration mode. See the <i>80 Series V Service Information</i>.</p>                                                                             |
|              | Any switch position<br> $mV$<br><b>Power-up</b>                                                                                                                                                                                                                                                                                                                                          | <p>Switches between the ranges available for the selected function. To return to autoranging, hold the button down for 1 second.</p> <p>Switches between °C and °F.</p> <p>Enables the Meter's smoothing feature. The Meter reads "S---" until  is released.</p>                                                                          |

**Table 4. Pushbuttons (cont.)**

| Button                                                                            | Switch Position                                                                                                                                        | Function                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AutoHOLD                                                                          | Any switch position<br>MIN MAX recording<br>Frequency counter<br><b>Power-up</b>                                                                       | AutoHOLD (formerly TouchHold) captures the present reading on the display. When a new, stable reading is detected, the Meter beeps and displays the new reading.<br><br>Stops and starts recording without erasing recorded values.<br><br>Stops and starts the frequency counter.<br><br>Turns on all LCD segments.                                                                                                               |
|  | Any switch position                                                                                                                                    | Turns the backlight on, makes it brighter, and turns it off.<br><br>For Model 87, hold  down for one second to enter the HiRes digit mode. The “HiRes” icon appears on the display. To return to the 3-1/2 digit mode, hold  down for one second. HiRes = 19,999 |
|  | Continuity <br>MIN MAX recording<br>Hz, Duty Cycle<br><b>Power-up</b> | Turns the continuity beeper on and off<br><br>Switches between Peak (250 $\mu$ s) and Normal (100 ms) response times.<br><br>Toggles the meter to trigger on positive or negative slope.<br><br>Disables the beeper for all functions. The Meter reads “bEEP” until  is released.                                                               |

Table 4. Pushbuttons (cont)

| Button                           | Switch Position                                              | Function                                                                                                                                                                                                                                                                                                                                                     |
|----------------------------------|--------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <div>REL Δ</div> (Relative mode) | Any switch position<br><br><b>Power-up</b>                   | <p>Stores the present reading as a reference for subsequent readings. The display is zeroed, and the stored reading is subtracted from all subsequent readings.</p> <p>Enables zoom mode for the bar graph. Refer to Zoom Mode in the Users Manual located on the 80 Series V User Manuals CD. The Meter reads “REL” until <div>REL Δ</div> is released.</p> |
| <div>Hz %</div>                  | Any switch position except diode test<br><br><b>Power-up</b> | <p>Press <div>Hz %</div> for frequency measurements.</p> <p>Starts the frequency counter.</p> <p>Press again to enter duty cycle mode.</p> <p>Enables the Meter's high impedance mode when the mV dc function is used. The Meter reads “Hi Z” until <div>Hz %</div> is released.</p>                                                                         |

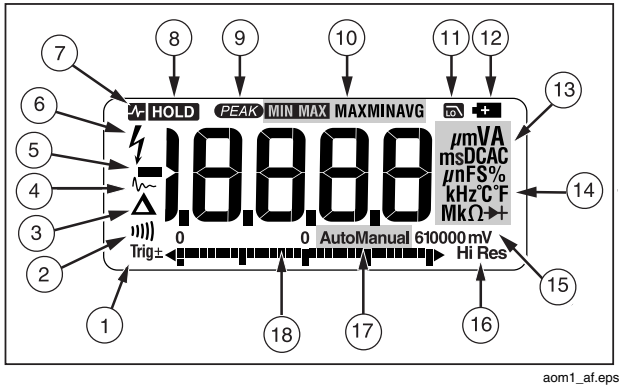

**Figure 1. Display Features (Model 87)**

**Table 5. Display Features**

| Number | Feature | Indication                                                         |
|--------|---------|--------------------------------------------------------------------|
| ①      | ±       | Polarity indicator for the analog bar graph.                       |
|        | Trig±   | Positive or negative slope indicator for Hz/duty cycle triggering. |
| ②      | )       | The continuity beeper is on.                                       |
| ③      | Δ       | Relative (REL) mode is active.                                     |
| ④      | ~~~~    | Smoothing is active.                                               |

| Number | Feature                   | Indication                                                                                                                                                                                       |
|--------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ⑤      | -                         | Indicates negative readings. In relative mode, this sign indicates that the present input is less than the stored reference.                                                                     |
| ⑥      | ⚡                         | Indicates the presence of a high voltage input. Appears if the input voltage is 30 V or greater (ac or dc). Also appears in low pass filter mode. Also appears in cal, Hz, and duty cycle modes. |
| ⑦      | ⏏ HOLD                    | AutoHOLD is active.                                                                                                                                                                              |
| ⑧      | HOLD                      | Display Hold is active.                                                                                                                                                                          |
| ⑨      | PEAK                      | Indicates the Meter is in Peak Min Max mode and the response time is 250 μs (87 only).                                                                                                           |
| ⑩      | MIN MAX<br>MAX MIN<br>AVG | Indicators for minimum-maximum recording mode.                                                                                                                                                   |
| ⑪      | LO                        | Low pass filter mode (87 only). See “Low Pass Filter (87).”                                                                                                                                      |
| ⑫      | ⚡+                        | The battery is low. <b>⚠ Warning: To avoid false readings, which could lead to possible electric shock or personal injury, replace the battery as soon as the battery indicator appears.</b>     |

Table 5. Display Features (cont.)

| Number | Feature                                                                | Indication                                                                                   |
|--------|------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| ⑬      | <b>A, <math>\mu</math>A, mA</b>                                        | Amperes (amps), Microamp, Milliamp                                                           |
|        | <b>V, mV</b>                                                           | Volts, Millivolts                                                                            |
|        | <b><math>\mu</math>F, nF</b>                                           | Microfarad, Nanofarad                                                                        |
|        | <b>nS</b>                                                              | Nanosiemens                                                                                  |
|        | <b>%</b>                                                               | Percent. Used for duty cycle measurements.                                                   |
|        | <b><math>\Omega</math>, M<math>\Omega</math>, k<math>\Omega</math></b> | Ohm, Megohm, Kilohm                                                                          |
|        | <b>Hz, kHz</b>                                                         | Hertz, Kilohertz                                                                             |
|        | <b>AC DC</b>                                                           | Alternating current, direct current                                                          |
| ⑭      | <b><math>^{\circ}</math>C, <math>^{\circ}</math>F</b>                  | Degrees Celsius, Degrees Fahrenheit                                                          |
| ⑮      | <b>610000 mV</b>                                                       | Displays selected range                                                                      |
| ⑯      | <b>HiRes</b>                                                           | The Meter is in high resolution (Hi Res) mode. HiRes=19,999                                  |
| ⑰      | <b>Auto</b>                                                            | The Meter is in autorange mode and automatically selects the range with the best resolution. |
|        | <b>Manual</b>                                                          | The Meter is in manual range mode.                                                           |

| Number           | Feature                                                                            | Indication                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------|------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ⑱                |  | The number of segments is relative to the full-scale value of the selected range. In normal operation 0 (zero) is on the left. The polarity indicator at the left of the graph indicates the polarity of the input. The graph does not operate with the capacitance, frequency counter functions, temperature, or peak min max. For more information, See "Bar Graph" in the Users Manual located on the <i>80 Series V User Manual CD</i> . The bar graph also has a zoom function, as described under "Zoom Mode". |
| --               | <b>OL</b>                                                                          | Overload condition is detected.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Display Messages |                                                                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>bAtt</b>      |                                                                                    | Replace the battery immediately.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>d SC</b>      |                                                                                    | In the capacitance function, too much electrical charge is present on the capacitor being tested.                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>EEP Err</b>   |                                                                                    | Invalid EEPROM data. Have Meter serviced.                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>CAL Err</b>   |                                                                                    | Invalid calibration data. Calibrate Meter.                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| <b>LEAd</b>      |                                                                                    |  Test lead alert. Displayed when the test leads are in the <b>A</b> or <b>mA/<math>\mu</math>A</b> terminal and the selected rotary switch position does not correspond to the terminal being used.                                                                                                                                                                                                                                 |
| <b>FB-Err</b>    |                                                                                    | Invalid model. Have Meter serviced.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <b>OPEn</b>      |                                                                                    | Open thermocouple is detected.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |



## Power-Up Options

Holding a button down while turning the Meter on activates a power-up option. Table 4 includes the power-up options.

## Automatic Power-Off

The Meter automatically turns off if you do not turn the rotary switch or press a button for 30 minutes. If MIN MAX Recording is enabled, the Meter will not power off. To disable automatic power-off, refer to Table 4.

## Input Alert™ Feature

If a test lead is plugged into the mA/μA or A terminal, but the rotary switch is not set to the correct current position, the beeper warns you by making a chirping sound and the display flashes “L E Ad”. This warning is intended to stop you from attempting to measure voltage, continuity, resistance, capacitance, or diode values when the leads are plugged into a current terminal.

### Caution

Placing the probes across (in parallel with) a powered circuit when a lead is plugged into a current terminal can damage the circuit you are testing and blow the Meter's fuse. This can happen because the resistance through the Meter's current terminals is very low, so the Meter acts like a short circuit.

## Low Pass Filter (87)


The 87 is equipped with an ac low pass filter. When measuring ac voltage or ac frequency, press  to activate the low pass filter mode (). The Meter continues measuring in the chosen ac mode, but now the signal diverts through a filter that blocks unwanted voltages above 1 kHz, refer to Figure 2. The lower frequency voltages pass with reduced accuracy to the measurement below 1 kHz. The low pass filter can improve measurement performance on composite sine waves that are typically generated by inverters and variable frequency motor drives.

### Warning

**To avoid possible electric shock or personal injury, do not use the Low Pass Filter option to verify the presence of hazardous voltages. Voltages greater than what is indicated may be present. First, make a voltage measurement without the filter to detect the possible presence of hazardous voltage. Then select the filter function.**

### Note

*In Low Pass Mode, the Meter goes to manual mode. Select ranges by pressing the RANGE button. Autoranging is not available in Low Pass Mode.*

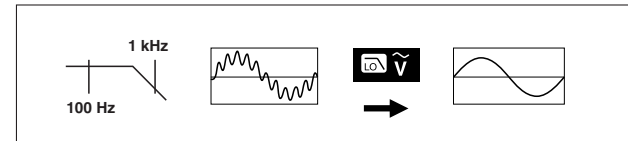

aom11f.eps

**Figure 2. Low Pass Filter**

## Bar Graph

The analog bar graph functions like the needle on an analog meter, but without the overshoot. The bar graph updates 40 times per second. Because the graph responds 10 times faster than the digital display, it is useful for making peak and null adjustments and observing rapidly changing inputs. The graph is not shown for capacitance, frequency counter functions, temperature, or peak min max.

The number of lit segments indicates the measured value and is relative to the full-scale value of the selected range.

In the 60 V range, for example, the major divisions on the scale represent 0, 15, 30, 45, and 60 V. An input of -30 V lights the negative sign and the segments up to the middle of the scale.

The bar graph also has a zoom function, as described under “Zoom Mode” in the Users Manual located on the 80 Series V User Manuals CD.

**Table 6. MIN MAX Functions**

| Button                                                                                                       | MIN MAX Function                                                                                                                                                                                                                                             |
|--------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | Enter MIN MAX recording mode. The Meter is locked in the range displayed before you entered MIN MAX mode. (Select the desired measurement function and range before entering MIN MAX.) The Meter beeps each time a new minimum or maximum value is recorded. |
| <br>(while in MIN MAX mode) | Step through maximum (MAX), minimum (MIN), and average (AVG) and present values.                                                                                                                                                                             |
| <br>PEAK MIN MAX            | Model 87 only: Select 100 ms or 250 $\mu$ s response time. (The 250 $\mu$ s response time is indicated by <b>PEAK</b> on the display.) Stored values are erased. The present and AVG (average) values are not available when 250 $\mu$ s is selected.        |
|                             | Stop recording without erasing stored values. Press again to resume recording.                                                                                                                                                                               |
| <br>(hold for 1 second)     | Exit MIN MAX mode. Stored values are erased. The Meter stays in the selected range.                                                                                                                                                                          |

## AutoHOLD Mode

### Warning

To avoid electrical shock or personal injury, do not use AutoHOLD mode to determine that circuits are without power. The AutoHOLD mode will not capture unstable or noisy readings.

The AutoHOLD mode captures the present reading on the display. When a new, stable reading is detected, the Meter beeps and displays the new reading. To enter or exit AutoHOLD mode, press .

## Relative Mode

Selecting relative mode () causes the Meter to zero the display and store the present reading as the reference for subsequent measurements. The Meter is locked into the range selected when you pressed . Press  again to exit this mode.

In relative mode, the reading shown is always the difference between the present reading and the stored reference value. For example, if the stored reference value is 15.00 V and the present reading is 14.10 V, the display shows -0.90 V.

## Maintenance

### Warning

To avoid electrical shock or personal injury, repairs or servicing not covered in this manual should be performed only by qualified personnel as described in the *80 Series V Service Information*.

## General Maintenance

Periodically wipe the case with a damp cloth and mild detergent. Do not use abrasives or solvents.

## Fuse Test

If a test lead is plugged into the mA/μA or A terminal and the rotary switch is turned to a non-current function, the Meter chirps and flashes "L E R d" if the fuse associated with that current terminal is good. If the Meter does not chirp or flash "L E R d", the fuse is bad and must be replaced.

### Warning

To avoid electrical shock or personal injury, remove the test leads and any input signals before replacing the battery or fuses. To prevent damage or injury, install ONLY specified replacement fuses with the amperage, voltage, and speed ratings shown in Replacement Parts in the Users Manual located on the *80 Series V User Manual CD*.

## **Specifications**

**Maximum Voltage between any Terminal and Earth Ground:** 1000 V rms

⚠ **Fuse Protection for mA or  $\mu$ A inputs:** 44/100 A, 1000 V FAST Fuse

⚠ **Fuse Protection for A input:** 11 A, 1000 V FAST Fuse

**Display:** Digital: 6000 counts updates 4/sec; (Model 87 also has 19,999 counts in high-resolution mode).

**Analog Bargraph:** 33 segments, updates 40/sec. Frequency: 19,999 counts, updates 3/sec at > 10 Hz

**Temperature:** Operating: -20 °C to +55 °C; Storage: -40 °C to +60 °C

**Altitude:** Operating: 2000 m; Storage: 10,000 m

**Temperature Coefficient:** 0.05 x (specified accuracy)/ °C (< 18 °C or > 28 °C)

**Electromagnetic Compatibility:** In an RF field of 3 V/m total accuracy = specified accuracy + 20 counts

Except: 600  $\mu$ A dc range total accuracy=specified accuracy + 60 counts.

Temperature not specified.

**Relative Humidity:** 0 % to 90 % (0 °C to 35 °C); 0 % to 70 % (35 °C to 55 °C)

**Battery Type:** 9 V zinc, NEDA 1604 or 6F22 or 006P

**Battery Life:** 400 hrs typical with alkaline (with backlight off)

**Vibration:** Per MIL-PRF-28800 for a Class 2 instrument

**Shock:** 1 Meter drop per IEC 61010-1:2001

**Size (HxWxL):** 1.25 in x 3.41 in x 7.35 in (3.1 cm x 8.6 cm x 18.6 cm)

**Size with Holster and Flex-Stand:** 2.06 in x 3.86 in x 7.93 in (5.2 cm x 9.8 cm x 20.1 cm)

**Weight:** 12.5 oz (355 g)

**Weight with Holster and Flex-Stand:** 22.0 oz (624 g)

**Safety:** Complies with ANSI/ISA S82.01-2004, CSA 22.2 No. 1010.1:2004 to 1000 V Overvoltage Category III, IEC 664 to 600 V Overvoltage Category IV. UL listed to UL61010-1. Licensed by TÜV to EN61010-1.

**IP Rating:** 30

## Detailed Specifications

For all detailed specifications:

Accuracy is given as  $\pm$ ([% of reading] + [number of least significant digits]) at 18° C to 28° C, with relative humidity up to 90 %, for a period of one year after calibration.

For Model 87 in the 4 ½-digit mode, multiply the number of least significant digits (counts) by 10. AC conversions are ac-coupled and valid from 3 % to 100 % of range. Model 87 is true rms responding. AC crest factor can be up to 3 at full scale, 6 at half scale. For non-sinusoidal wave forms add -(2 % Rdg + 2 % full scale) typical, for a crest factor up to 3.

**Table 7. Model 87 AC Voltage Function Specifications**

| Function                     | Range           | Resolution | Accuracy           |               |                                     |                |                              |                           |
|------------------------------|-----------------|------------|--------------------|---------------|-------------------------------------|----------------|------------------------------|---------------------------|
| $\tilde{V}$ <sup>[2,4]</sup> |                 |            | 45 – 65 Hz         | 30 – 200 Hz   | 200 – 440 Hz                        | 440 Hz - 1 kHz | 1 - 5 kHz                    | 5 - 20 kHz <sup>[1]</sup> |
|                              | 600.0 mV        | 0.1 mV     | ± (0.7 % + 4)      | ± (1.0 % + 4) |                                     |                | ± (2.0 % + 4)                | ± (2.0 % + 20)            |
|                              | 6.000 V         | 0.001 V    | ± (0.7 % + 2)      |               |                                     |                |                              |                           |
|                              | 60.00 V         | 0.01 V     |                    |               |                                     |                |                              |                           |
|                              | 600.0 V         | 0.1 V      |                    |               |                                     |                | ± (2.0 % + 4) <sup>[3]</sup> | unspecified               |
|                              | 1000 V          | 1 V        |                    |               |                                     |                | unspecified                  | unspecified               |
|                              | Low pass filter |            | Same as 45 - 65 Hz | ± (1.0 % + 4) | +1 % + 4<br>-6 % - 4 <sup>[5]</sup> | unspecified    | unspecified                  | unspecified               |

[1] Below 10 % of range, add 12 counts.

[2] The Meter is a true rms responding meter. When the input leads are shorted together in the ac functions, the Meter may display a residual reading between 1 and 30 counts. A 30 count residual reading will cause only a 2-digit change for readings over 3 % of range. Using REL to offset this reading may produce a much larger constant error in later measurements.

[3] Frequency range: 1 kHz to 2.5 kHz.

[4] A residual reading of up to 13 digits with leads shorted, will not affect stated accuracy above 3 % of range.

[5] Specification increases from -1% at 200 Hz to -6% at 440 Hz when filter is in use.

**Table 8. Model 83 AC Voltage Function Specifications**

| Function                                                                                  | Range    | Resolution | Accuracy           |                    |                      |
|-------------------------------------------------------------------------------------------|----------|------------|--------------------|--------------------|----------------------|
|                                                                                           |          |            | 50 Hz - 60 Hz      | 30 Hz - 1 kHz      | 1 kHz - 5 kHz        |
| $\tilde{V}^1$                                                                             | 600.0 mV | 0.1 mV     | $\pm (0.5 \% + 4)$ | $\pm (1.0 \% + 4)$ | $\pm (2.0 \% + 4)$   |
|                                                                                           | 6.000 V  | 0.001 V    | $\pm (0.5 \% + 2)$ | $\pm (1.0 \% + 4)$ | $\pm (2.0 \% + 4)$   |
|                                                                                           | 60.00 V  | 0.01 V     | $\pm (0.5 \% + 2)$ | $\pm (1.0 \% + 4)$ | $\pm (2.0 \% + 4)$   |
|                                                                                           | 600.0 V  | 0.1 V      | $\pm (0.5 \% + 2)$ | $\pm (1.0 \% + 4)$ | $\pm (2.0 \% + 4)^2$ |
|                                                                                           | 1000 V   | 1 V        | $\pm (0.5 \% + 2)$ | $\pm (1.0 \% + 4)$ | unspecified          |
| 1. Below a reading of 200 counts, add 10 counts.<br>2. Frequency range: 1 kHz to 2.5 kHz. |          |            |                    |                    |                      |

**Table 9. DC Voltage, Resistance, and Conductance Function Specifications**

| Function                                                                                                                                                                                                                                                                                    | Range                                                                                                                          | Resolution                                                                                                              | Accuracy                                                                                                                                                      |                                                                                                                                                               |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                             |                                                                                                                                |                                                                                                                         | Model 83                                                                                                                                                      | Model 87                                                                                                                                                      |
| $\overline{V}$                                                                                                                                                                                                                                                                              | 6.000 V<br>60.00 V<br>600.0 V<br>1000 V                                                                                        | 0.001 V<br>0.01 V<br>0.1 V<br>1 V                                                                                       | $\pm (0.1 \% + 1)$<br>$\pm (0.1 \% + 1)$<br>$\pm (0.1 \% + 1)$<br>$\pm (0.1 \% + 1)$                                                                          | $\pm (0.05 \% + 1)$<br>$\pm (0.05 \% + 1)$<br>$\pm (0.05 \% + 1)$<br>$\pm (0.05 \% + 1)$                                                                      |
| $\overline{mV}$                                                                                                                                                                                                                                                                             | 600.0 mV                                                                                                                       | 0.1 mV                                                                                                                  | $\pm (0.3 \% + 1)$                                                                                                                                            | $\pm (0.1 \% + 1)$                                                                                                                                            |
| $\Omega$                                                                                                                                                                                                                                                                                    | 600.0 $\Omega$<br>6.000 k $\Omega$<br>60.00 k $\Omega$<br>600.0 k $\Omega$<br>6.000 M $\Omega$<br>50.00 M $\Omega$<br>60.00 nS | 0.1 $\Omega$<br>0.001 k $\Omega$<br>0.01 k $\Omega$<br>0.1 k $\Omega$<br>0.001 M $\Omega$<br>0.01 M $\Omega$<br>0.01 nS | $\pm (0.4 \% + 2)^1$<br>$\pm (0.4 \% + 1)$<br>$\pm (0.4 \% + 1)$<br>$\pm (0.7 \% + 1)$<br>$\pm (0.7 \% + 1)$<br>$\pm (1.0 \% + 3)^2$<br>$\pm (1.0 \% + 10)^1$ | $\pm (0.2 \% + 2)^1$<br>$\pm (0.2 \% + 1)$<br>$\pm (0.2 \% + 1)$<br>$\pm (0.6 \% + 1)$<br>$\pm (0.6 \% + 1)$<br>$\pm (1.0 \% + 3)^2$<br>$\pm (1.0 \% + 10)^1$ |
| <b>nS</b>                                                                                                                                                                                                                                                                                   |                                                                                                                                |                                                                                                                         |                                                                                                                                                               |                                                                                                                                                               |
| <ol style="list-style-type: none"> <li>When using the REL <math>\Delta</math> function to compensate for offsets.</li> <li>Add 0.5 % of reading when measuring above 30 M<math>\Omega</math> in the 50 M<math>\Omega</math> range, and 20 counts below 33 nS in the 60 nS range.</li> </ol> |                                                                                                                                |                                                                                                                         |                                                                                                                                                               |                                                                                                                                                               |

**Table 10. Temperature Specifications (87 Only)**

| Temperature                                                                                                                                                                                                                                                                                     | Resolution       | Accuracy <sup>1,2</sup> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-------------------------|
| -200 °C to +1090 °C<br>-328 °F to +1994 °F                                                                                                                                                                                                                                                      | 0.1 °C<br>0.1 °F | 1 % + 10<br>1 % + 18    |
| <ol style="list-style-type: none"> <li>Does not include error of the thermocouple probe.</li> <li>Accuracy specification assumes ambient temperature stable to <math>\pm 1</math> °C. For ambient temperature changes of <math>\pm 5</math> °C, rated accuracy applies after 1 hour.</li> </ol> |                  |                         |

Table 11. Current Function Specifications

| Function                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | Range                 | Resolution | Accuracy              |                          | Burden Voltage<br>(typical) |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------|-----------------------|--------------------------|-----------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |                       |            | Model 83 <sup>1</sup> | Model 87 <sup>2, 3</sup> |                             |
| <b>mA</b><br><b>A~</b><br>(45 Hz to 2 kHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | 60.00 mA              | 0.01 mA    | $\pm (1.2 \% + 2)^5$  | $\pm (1.0 \% + 2)$       | 1.8 mV/mA                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 400.0 mA <sup>6</sup> | 0.1 mA     | $\pm (1.2 \% + 2)^5$  | $\pm (1.0 \% + 2)$       | 1.8 mV/mA                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 6.000 A               | 0.001 A    | $\pm (1.2 \% + 2)^5$  | $\pm (1.0 \% + 2)$       | 0.03 V/A                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10.00 A <sup>4</sup>  | 0.01 A     | $\pm (1.2 \% + 2)^5$  | $\pm (1.0 \% + 2)$       | 0.03 V/A                    |
| <b>mA</b><br><b>A==</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 60.00 mA              | 0.01 mA    | $\pm (0.4 \% + 4)$    | $\pm (0.2 \% + 4)$       | 1.8 mV/mA                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 400.0 mA <sup>6</sup> | 0.1 mA     | $\pm (0.4 \% + 2)$    | $\pm (0.2 \% + 2)$       | 1.8 mV/mA                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 6.000 A               | 0.001 A    | $\pm (0.4 \% + 4)$    | $\pm (0.2 \% + 4)$       | 0.03 V/A                    |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 10.00 A <sup>4</sup>  | 0.01 A     | $\pm (0.4 \% + 2)$    | $\pm (0.2 \% + 2)$       | 0.03 V/A                    |
| <b>μA ~</b><br>(45 Hz to 2 kHz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 600.0 μA              | 0.1 μA     | $\pm (1.2 \% + 2)^5$  | $\pm (1.0 \% + 2)$       | 100 μV/μA                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 6000 μA               | 1 μA       | $\pm (1.2 \% + 2)^5$  | $\pm (1.0 \% + 2)$       | 100 μV/μA                   |
| <b>μA ==</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 600.0 μA              | 0.1 μA     | $\pm (0.4 \% + 4)$    | $\pm (0.2 \% + 4)$       | 100 μV/μA                   |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 6000 μA               | 1 μA       | $\pm (0.4 \% + 2)$    | $\pm (0.2 \% + 2)$       | 100 μV/μA                   |
| 1. AC conversion for Model 83 is ac coupled and calibrated to the rms value of a sine wave input.<br>2. AC conversions for Model 87 are ac coupled, true rms responding, and valid from 3 % to 100 % of range, except 400 mA range (5 % to 100 % of range) and 10 A range (15 % to 100 % of range).<br>3. Model 87 is a true rms responding meter. When the input leads are shorted together in the ac functions, the Meter may display a residual reading between 1 and 30 counts. A 30 count residual reading will cause only a 2 digit change for readings over 3 % of range. Using REL to offset this reading may produce a much larger constant error in later measurements<br>4. <b>⚠</b> 10 A continuous up to 35 °C; < 20 minutes on, 5 minutes off at 35 °C to 55 °C. 20 A for 30 seconds maximum; > 10 A unspecified.<br>5. Below a reading of 200 counts, add 10 counts.<br>6. 400 mA continuous; 600 mA for 18 hrs maximum. |                       |            |                       |                          |                             |



**Table 12. Capacitance and Diode Function Specifications**

| Function                                                                          | Range         | Resolution    | Accuracy           |
|-----------------------------------------------------------------------------------|---------------|---------------|--------------------|
|  | 10.00 nF      | 0.01 nF       | $\pm (1 \% + 2)^1$ |
|                                                                                   | 100.0 nF      | 0.1 nF        | $\pm (1 \% + 2)^1$ |
|                                                                                   | 1.000 $\mu$ F | 0.001 $\mu$ F | $\pm (1 \% + 2)$   |
|                                                                                   | 10.00 $\mu$ F | 0.01 $\mu$ F  | $\pm (1 \% + 2)$   |
|                                                                                   | 100.0 $\mu$ F | 0.1 $\mu$ F   | $\pm (1 \% + 2)$   |
|                                                                                   | 9999 $\mu$ F  | 1 $\mu$ F     | $\pm (1 \% + 2)$   |
|  | 3.000 V       | 0.001 V       | $\pm (2 \% + 1)$   |
| 1. With a film capacitor or better, using Relative mode to zero residual.         |               |               |                    |

**Table 13. Frequency Counter Specifications**

| Function                                                     | Range      | Resolution | Accuracy             |
|--------------------------------------------------------------|------------|------------|----------------------|
| Frequency<br>(0.5 Hz to 200 kHz, pulse<br>width > 2 $\mu$ s) | 199.99     | 0.01 Hz    | $\pm (0.005 \% + 1)$ |
|                                                              | 1999.9     | 0.1 Hz     | $\pm (0.005 \% + 1)$ |
|                                                              | 19.999 kHz | 0.001 kHz  | $\pm (0.005 \% + 1)$ |
|                                                              | 199.99 kHz | 0.01 kHz   | $\pm (0.005 \% + 1)$ |
|                                                              | > 200 kHz  | 0.1 kHz    | unspecified          |

**Table 14. Frequency Counter Sensitivity and Trigger Levels**

| Input Range <sup>1</sup>                                       | Minimum Sensitivity (RMS Sine wave)                    |                   | Approximate Trigger Level<br>(DC Voltage Function) |
|----------------------------------------------------------------|--------------------------------------------------------|-------------------|----------------------------------------------------|
|                                                                | 5 Hz - 20 kHz                                          | 0.5 Hz - 200 kHz  |                                                    |
| 600 mV dc                                                      | 70 mV (to 400 Hz)                                      | 70 mV (to 400 Hz) | 40 mV                                              |
| 600 mV ac                                                      | 150 mV                                                 | 150 mV            | —                                                  |
| 6 V                                                            | 0.3 V                                                  | 0.7 V             | 1.7 V                                              |
| 60 V                                                           | 3 V                                                    | 7 V (≤140 kHz)    | 4 V                                                |
| 600 V                                                          | 30 V                                                   | 70 V (≤14.0 kHz)  | 40 V                                               |
| 1000 V                                                         | 100 V                                                  | 200 V (≤1.4 kHz)  | 100 V                                              |
| Duty Cycle Range                                               | Accuracy                                               |                   |                                                    |
| 0.0 to 99.9 %                                                  | Within ± (0.2% per kHz + 0.1 %) for rise times < 1 μs. |                   |                                                    |
| 1. Maximum input for specified accuracy = 10X Range or 1000 V. |                                                        |                   |                                                    |

**Table 15. Electrical Characteristics of the Terminals**

| Function                                                                          | Overload Protection <sup>1</sup> | Input Impedance (nominal)   | Common Mode Rejection Ratio (1 kΩ unbalance) |                | Normal Mode Rejection         |        |       |       |      |        |
|-----------------------------------------------------------------------------------|----------------------------------|-----------------------------|----------------------------------------------|----------------|-------------------------------|--------|-------|-------|------|--------|
|  | 1000 V rms                       | 10 MΩ < 100 pF              | > 120 dB at dc, 50 Hz or 60 Hz               |                | > 60 dB at 50 Hz or 60 Hz     |        |       |       |      |        |
|  | 1000 V rms                       | 10 MΩ < 100 pF              | > 120 dB at dc, 50 Hz or 60 Hz               |                | > 60 dB at 50 Hz or 60 Hz     |        |       |       |      |        |
|  | 1000 V rms                       | 10 MΩ < 100 pF (ac-coupled) | > 60 dB, dc to 60 Hz                         |                |                               |        |       |       |      |        |
|                                                                                   |                                  | Open Circuit Test Voltage   | Full Scale Voltage                           |                | Typical Short Circuit Current |        |       |       |      |        |
|                                                                                   |                                  |                             | To 6.0 MΩ                                    | 50 MΩ or 60 nS | 600 Ω                         | 6 k    | 60 k  | 600 k | 6 M  | 50 M   |
|  | 1000 V rms                       | < 7.9 V dc                  | < 4.1 V dc                                   | < 4.5 V dc     | 1 mA                          | 100 μA | 10 μA | 1μA   | 1 μA | 0.5 μA |
|  | 1000 V rms                       | < 7.9 V dc                  | 3.000 V dc                                   |                | 1.0 mA typical                |        |       |       |      |        |
| 1. 10 <sup>6</sup> V Hz max                                                       |                                  |                             |                                              |                |                               |        |       |       |      |        |

**Table 16. MIN MAX Recording Specifications**

| Model                                            | Nominal Response                                                                 | Accuracy                                                                                                                                                                                                                                                                      |
|--------------------------------------------------|----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 83                                               | 100 ms to 80 %                                                                   | Specified accuracy $\pm$ 12 counts for changes > 200 ms in duration ( $\pm$ 40 counts in ac with beeper on)                                                                                                                                                                   |
| 87                                               | 100 ms to 80 % (dc functions)                                                    | Specified accuracy $\pm$ 12 counts for changes > 200 ms in duration                                                                                                                                                                                                           |
|                                                  | 120 ms to 80 % (ac functions)<br>250 $\mu$ s (peak) (Model 87 only) <sup>1</sup> | Specified accuracy $\pm$ 40 counts for changes > 350 ms and inputs > 25 % of range<br><br>Specified accuracy $\pm$ 100 counts for changes > 250 $\mu$ s in duration (add $\pm$ 100 counts for readings over 6000 counts) (add $\pm$ 100 counts for readings in Low Pass mode) |
| 1. For repetitive peaks: 1 ms for single events. |                                                                                  |                                                                                                                                                                                                                                                                               |



**205 Westwood Ave  
Long Branch, NJ 07740  
1-877-742-TEST (8378)  
Fax: (732) 222-7088  
salesteam@Tequipment.NET**