



In-Sure™ Push-In Wire Connector



- *Clear shell gives visual verification of connection*
- *No-twist connection reduces repetitive motion fatigue*
- *Compact size makes installation easy*
- *Low insertion force for fast and easy connections*
- *Fits any combination of 12-18 AWG solid or tin-bonded copper conductors*

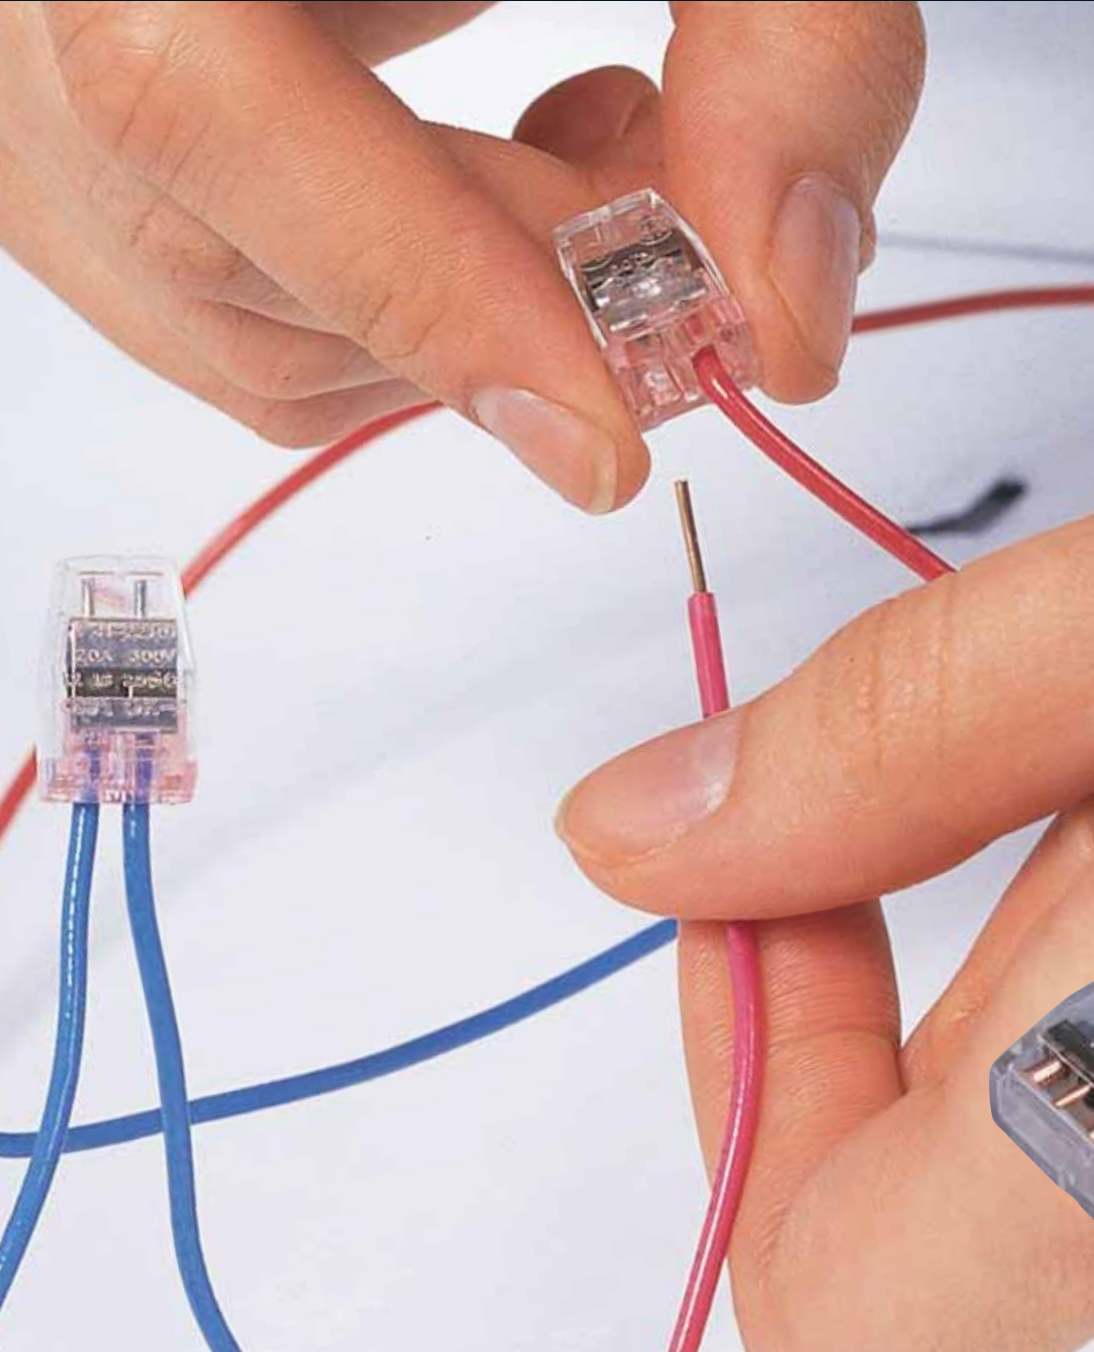

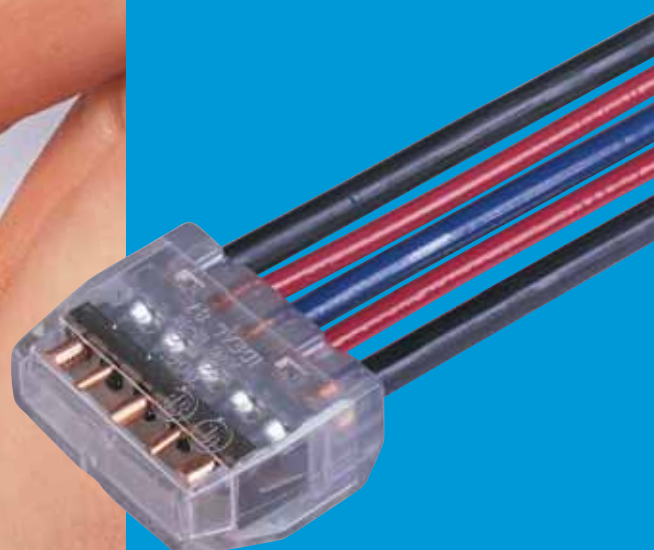


In-Sure™ Push-In Wire Connectors

The In-Sure™ Push-In Wire Connector from IDEAL. The fastest, easiest, no-twist push-in connector. Perfect for OEM lighting manufacturing, prefabricated wiring systems and other OEM and branch circuit wiring applications. The clear polycarbonate housing allows visual verification of every connection. Simply glide the wire in – the low insertion force makes it easy. In-Sure™ also allows removal of the wire after the connection has been established. UL Listed 94 D-Z, CSA Certified, and rated to 600V and 105°C. In-Sure™ saves time and improves productivity while perfecting connections.



Features

- Accepts any combination of 12-18 AWG solid or tin-bonded copper conductors
- Electrolytic tin-plated copper bus system
- Stainless steel inserts restrict pull-out
- Available in 2 through 8 port models
- Color-coded for easy identification
- Each connector subjected to 3000V dielectric test
- Check port for continuity testing
- Built-in strip length gauge

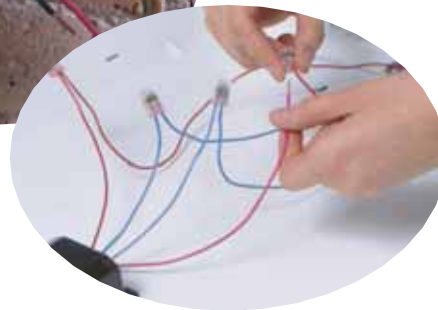

Model	Color	No. of Ports	Length		Width		Height		Quantity	Cat. No.
			in.	mm	in.	mm	in.	mm		
84	Red	2	.355	9.02	.434	11.02	.729	18.52	Box of 100	30-084
									Jar of 300	30-084J
									Box of 1,000	30-184
									Box of 5,000	30-684
85	Orange	3	.355	9.02	.591	15.01	.729	18.52	Box of 100	30-085
									Jar of 250	30-085J
									Box of 1,000	30-185
									Box of 5,000	30-685
86	Yellow	4	.355	9.02	.748	18.99	.729	18.52	Box of 100	30-086
									Jar of 200	30-086J
									Box of 1,000	30-186
									Box of 4,000	30-686
87	Gray	5	.355	9.02	.907	23.03	.729	18.52	Box of 50	30-087
									Jar of 150	30-087J
									Box of 1,000	30-187
									Box of 5,000	30-687
88	Blue	6 Stacked	.607	15.42	.603	15.32	.729	18.52	Box of 50	30-088
									Jar of 100	30-088J
									Box of 1,000	30-188
									Box of 5,000	30-688
90	Black	8	.355	9.02	1.38	35.03	.717	18.21	Box of 50	30-090
									Jar of 100	30-090J
									Box of 1,000	30-190
									Box of 2,000	30-690



Form No. P-1608
©2000 IDEAL INDUSTRIES, INC.



205 Westwood Ave
Long Branch, NJ 07740
1-877-742-TEST (8378)
Fax: (732) 222-7088
salesteam@Tequipment.NET

Rev. 5/06
Printed in U.S.A.