


8
7
6
5
4
3
2
1
RESTRICTED

THIS PRINT IS PROPRIETARY AND CONFIDENTIAL AND MUST NOT BE COPIED OR ITS CONTENTS REVEALED TO UNAUTHORIZED PERSONNEL WITHOUT WRITTEN CONSENT OF ERICSON MANUFACTURING CO. IT IS TO BE RETURNED TO ERICSON MFG. UPON REQUEST.

SEE NOTE 12
FOR LABEL
PLACEMENTLISTED
WATERTITE
OUTDOOR-
RATED PLUG.
SEE TABLE.SOCKET
#1SOCKET
#2SOCKET
#3SOCKET
#4SOCKET
#5SOCKET
#6SOCKET
#7SOCKET
#8SOCKET
#9SOCKET
#10SOCKET DROPS MAY BE EQUIPPED
WITH OPTIONAL BRASS EYELETS
SOCKET DROPS MAY BE EQUIPPED
WITH OPTIONAL BRASS RINGSSEOW/STW CABLE
SEE TABLE FOR SIZE AND COLORLISTED
WATERTITE OUTDOOR
CONNECTOR WITH COVER
CAP. CAP ENGRAVED
"COVER UNUSED CONNECTOR"
SEE TABLE.UL
FRENCH
LABEL



C8021011

RATING
LABELC8020505
C8020505-1
C8020505-2
C8020505-3
C8020505-4CSA
FRENCH
LABEL

C8020661

CSA
CERT
LABEL

C8020430

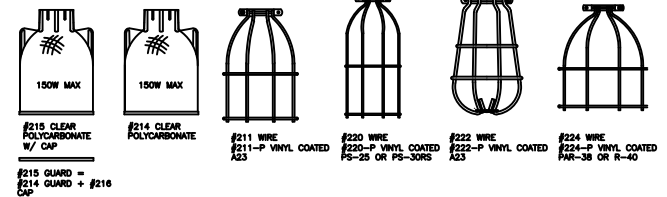
UL
LISTING
LABELC8020438
C8020438-1FRENCH
SELF BALL
LABEL

C8020505-SB-1

LABEL
ILLUSTRATIONS
ARE FOR
REFERENCE ONLY.
SEE LABEL
DRAWING FOR
CURRENT
REVISION.SOCKET RATING:
150W (UL OR CSA LISTED)
200W (UL LISTED OR UNLISTED)

NOTES:

- AWG 14 MODELS ARE UL LISTED E86155. AWG 12 MODELS ARE UL AND cUL LISTED E86155 AND CSA CERTIFIED FILE LL84688, EXCEPT WHERE NOTED. SEE CHART.
- STRINGLIGHT DESIGNED TO BE SUPPORTED AT EACH SOCKET.
- SUPPLIED WITH 9 FT PRIMARY AND 1 FOOT SECONDARY.
- 5 OR 10 LAMP SOCKETS SPACED AS SHOWN ABOVE, SEE TABLE.
5 SOCKET STRINGLIGHTS ARE 50FT. 10 SOCKET STRINGLIGHTS ARE 100FT O.A.L.
- UL LISTING REQUIRES THE USE OF GUARDS AT EACH SOCKET.
- SEE TABLE FOR RATING AND CABLE COLOR.
- DO NOT SUBMERGE. DO NOT USE IN STANDING WATER.
- DROPS MOLDED FROM TPE ELASTOMER.
- UL LISTED. 20A CORDS ARE NOT CSA CERTIFIED. 240V AND 208V CORDS ARE NOT LISTED OR CERTIFIED.
- OPERATING TEMP -40C TO +45C
- PACKED IN CARTON C8010965 WITH INSTRUCTION SHEET C8020254
- PLACE C8021011 WITHIN 6 INCHES OF PLUG. PLACE ALL OTHER LABELS IN ORDER SHOWN, AS CLOSE TO C8021011 AND EACH OTHER AS POSSIBLE.

UL LISTING AND CSA CERTIFICATION IS VOID UNLESS STRING IS USED WITH
ONE OF THESE 1-3/4" NECK DIAMETER GUARDS ON EACH DROP.

M	UPDATED RATING. ADDED WATTS/SOCKET	1/8/19		JRA	4485
L	REVISED NOTE #9 - BLACK DROPS ARE LISTED	3/13/18	SAH	RWH	4378
K	UPDATED LABELS, REVISED FMLY DWG ONLY.	10/2/17	RWH		4331
J	UPDATED LABELS, REVISED FMLY DWG ONLY.	9/15/15	JMM		3963
H	ADDED FRENCH UL LABELS, REVISED FMLY DWG ONLY.	8/5/14		JRA	3750
REV	REVISION DESCRIPTION	DATE	BY	CHKD	ECN NO.
A	AS DRAWN				
B	REVISED LABELING	10/03/07		JRA	2332
C	DRAWING AND BOM CORRECTIONS	12/14/07	D.A.N.	JRA	2375
D	ADDED FRENCH LABEL TO CSA UNITS	07/30/08		JRA	2547
E	CHG'D RATINGS OF CANADIAN UNITS PER UL	10/12/08		JRA	2574
F	BOM CHANGED FOR 12350B-1 & 123100B-1	1/26/10	D.A.N.	JRA	2864
G	ADDED PG 3.	5/23/11		JRA	3080

N | ADDED FRENCH SELF BALLASTED LABEL | 3/11/19 | SAH | JRA | 4503 |

TOLERANCES

FRAC. ± 1/64
.X ± .015
.XX ± .010
.XXX ± .005
ANGLES ± 1°
UNLESS OTHERWISE
SPECIFIED
DO NOT SCALE
B SIZE

DWG. APPROVALS DATE REV.

DRAWN JRA 10/1/07
CHK'D**ERICSON**
SAFETY IS OUR STANDARDERICSON MANUFACTURING COMPANY
1-800-ERICSON • www.ericson.com

DWG. TITLE

123XX & 143XX
HEAVY DUTY IDC STYLE
MOLDED STRINGLIGHTSSCALE
NTSPROJ NO.
--/--

SHEET 1 OF 3

DWG. UNIT NO.

HD FAMILY

REV

N

PART NUMBER SELECTION CHART								RATING(S)	LISTING	REV LEVEL	
AWG	LENGTH	BODY	CAPS	UL MODEL NO.	SUB-ASSY P/N	SOCKETS	RATING LABEL	CANADIAN RATING IS LOWER			WATTS/SOCKET
14	50	YEL	BLUNT	14350Y	0.5 B1047052	5	C8020505	15A 120V 1800W	UNLISTED	A	150
			5-15	14350Y-1	0.5 B1047052	5	C8020505	15A 120V 1800W	UL	F	150
			L5-15	14350Y-2	0.5 B1047052	5	C8020505	15A 120V 1800W	UL	F	150
		BLK	BLUNT	14350B	0.5 B1046916	5	C8020505	15A 120V 1800W	UNLISTED	A	150
			5-15	14350B-1	0.5 B1046916	5	C8020505	15A 120V 1800W	UL	A	150
			L5-15	14350B-2	0.5 B1046916	5	C8020505	15A 120V 1800W	UL	A	150
14	100	YEL	BLUNT	143100Y	B1047052	10	C8020505	15A 120V 1800W	UNLISTED	A	150
			5-15	143100Y-1	B1047052	10	C8020505	15A 120V 1800W	UL	F	150
			L5-15	143100Y-2	B1047052	10	C8020505	15A 120V 1800W	UL	F	150
		BLK	BLUNT	143100B	B1046916	10	C8020505	15A 120V 1800W	UNLISTED	A	150
			5-15	143100B-1	B1046916	10	C8020505	15A 120V 1800W	UL	A	150
			L5-15	143100B-2	B1046916	10	C8020505	15A 120V 1800W	UL	A	150
12	50	YEL	BLUNT	12350Y	0.5 B1046911	5	C8020505-4	20A 120V 2400W	UNLISTED	A	150
			5-15	12350Y-1	0.5 B1046911	5	C8020505-1	12A 120V 1500W	cULus + CSA	H	150
			L5-15	12350Y-2	0.5 B1046911	5	C8020505-1	12A 120V 1500W	cULus + CSA	H	150
			5-20	12350Y-3	0.5 B1046911	5	C8020505-1	12A 120V 1500W	cULus	G	150
		BLK	BLUNT	12350B	0.5 B1046912	5	C8020505-4	20A 120V 2400W	UNLISTED	A	150
			5-15	12350B-1	0.5 B1046912	5	C8020505-1	12A 120V 1500W	cULus + CSA	G	150
			L5-15	12350B-2		5	C8020505-1	12A 120V 1500W	cULus + CSA	B	150
			L5-20	12350B-3		5	C8020505-1	12A 120V 1500W	cULus	B	150
12	100	YEL	BLUNT	123100Y	B1046911	10	C8020505-4	20A 120V 2400W	UNLISTED	A	150
			5-15	123100Y-1	B1046911	10	C8020505-1	12A 120V 1500W	cULus + CSA	H	150
			L5-15	123100Y-2	B1046911	10	C8020505-1	12A 120V 1500W	cULus + CSA	H	150
			L5-20	123100Y-3	B1046911	10	C8020505-1	12A 120V 1500W	cULus	G	150
		BLK	BLUNT	123100B	B1046912	10	C8020505-4	20A 120V 2400W	UNLISTED	A	150
			5-15	123100B-1	B1046912	10	C8020505-1	12A 120V 1500W	cULus + CSA	G	150
			L5-15	123100B-2	B1046912	10	C8020505-1	12A 120V 1500W	cULus + CSA	B	150
			L5-20	123100B-3	B1046912	10	C8020505-1	12A 120V 1500W	cULus	B	150

208V 3 PHASE										
PART NUMBER SELECTION CHART								RATING(S)	LISTING	REV LEVEL
AWG	LENGTH	BODY	CAPS	MODEL NO.	SUB-ASSY P/N	SOCKETS	RATING LABEL			
12	90	YEL	L21-20	12590Y-5	-	9	C8020505-2	16A 120Y208V 5760W	UNLISTED	A
12	60	YEL	L21-20	12560Y-5	-	6	C8020505-2	16A 120Y208V 5760W	UNLISTED	A
12	90	BLK	L21-20	12590B-5	-	9	C8020505-2	16A 120Y208V 5760W	UNLISTED	A
12	60	BLK	L21-20	12560B-5	-	6	C8020505-2	16A 120Y208V 5760W	UNLISTED	A

240V 1 PHASE										
PART NUMBER SELECTION CHART								RATING(S)	LISTING	REV LEVEL
AWG	LENGTH	BODY	CAPS	UL MODEL NO.	SUB-ASSY P/N	SOCKETS	RATING LABEL			
12	100	YEL	L14-20	124100Y-5	-	10	C8020505-3	20A 250V 5000w	UNLISTED	A
12	60	YEL	L14-20	12460Y-5	-	6	C8020505-3	20A 250V 5000w	UNLISTED	A
12	100	BLK	L14-20	124100B-5	-	10	C8020505-3	20A 250V 5000w	UNLISTED	A
12	60	BLK	L14-20	12460B-5	-	6	C8020505-3	20A 250V 5000w	UNLISTED	A

ALL UNITS ALSO SUPPLIED WITH (1) C8020254 TRI-LINGUAL NSTRUCTION SHEET, (1) C8010965 CARTON, AND (1) C8020444 CARTON LABEL.
(THE CARTON IS INCLUDED IN THE SL SUBASSEMBLY).

REV	REVISION DESCRIPTION	DATE	BY	CHKD	ECN NO.
	SEE SHEET 1				

TOLERANCES
FRAC. ±1/64
.X ±.015
.XX ±.010
.XXX ±.005
ANGLES ±1°
UNLESS OTHERWISE SPECIFIED
DO NOT SCALE
B SIZE

DWG. APPROVALS	DATE	REV.
DRAWN JRA	10/1/07	
CHK'D		



ERICSON
SAFETY IS OUR STANDARD

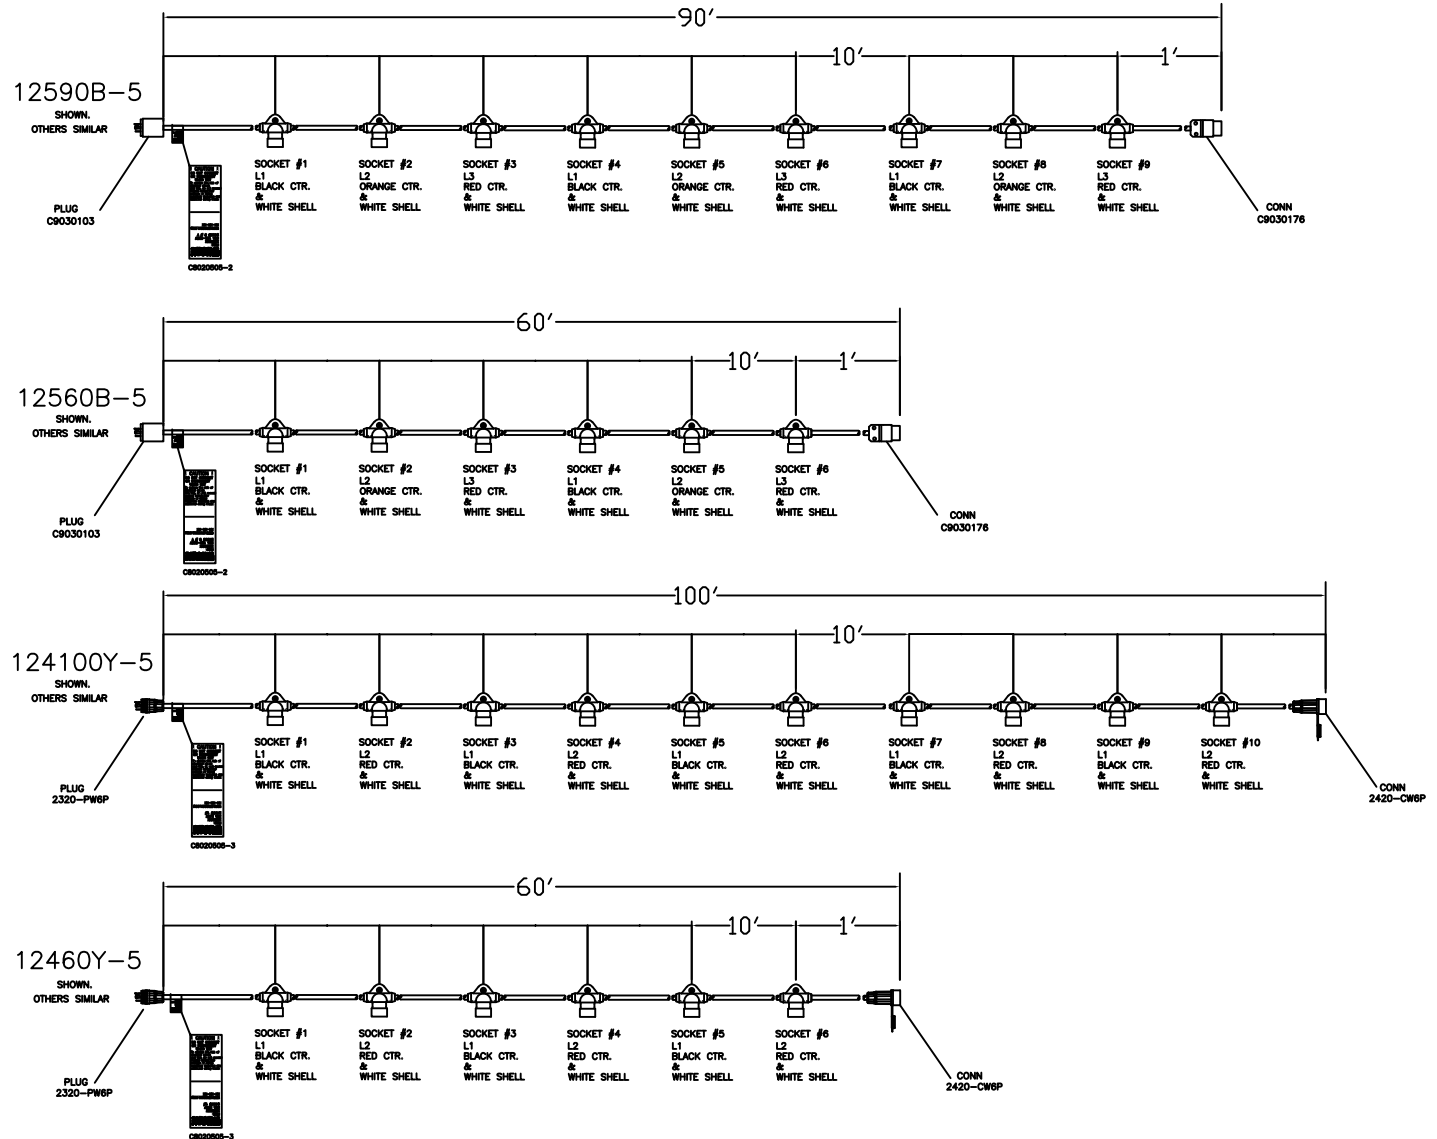
ERICSON MANUFACTURING COMPANY
1-800-ERICSON • www.ericson.com

DWG. TITLE		
123XX & 143XX HEAVY DUTY IDC STYLE MOLDED STRINGLIGHTS		
SCALE NTS	PROJ NO. --/--	SHEET 2 OF 3
DWG. UNIT NO. HD FAMILY		REV N

RESTRICTED

THIS PRINT IS PROPRIETARY AND CONFIDENTIAL AND MUST NOT BE COPIED OR ITS CONTENTS REVEALED TO UNAUTHORIZED PERSONNEL WITHOUT WRITTEN CONSENT OF ERICSON MANUFACTURING CO. IT IS TO BE RETURNED TO ERICSON MFG. UPON REQUEST.

240V AND 208V STRINGS



REV	REVISION DESCRIPTION	DATE	BY	CHKD	ECN NO.
1	SEE SHEET 1				

TOLERANCES
 FRAC. $\pm 1/64$
 .X $\pm .015$
 .XX $\pm .010$
 .XXX $\pm .005$
 ANGLES $\pm 1^\circ$
 UNLESS OTHERWISE SPECIFIED
 DO NOT SCALE
 B SIZE

DWG. APPROVALS

DATE REV.

DRAWN JRA 10/1/07

CHK'D



ERICSON
 SAFETY IS OUR STANDARD

ERICSON MANUFACTURING COMPANY
 1-800-ERICSON • www.ericson.com

DWG. TITLE		
123XX & 143XX HEAVY DUTY IDC STYLE MOLDED STRINGLIGHTS		
SCALE NTS	PROJ NO. --/--	SHEET 3 OF 3
DWG. UNIT NO. HD FAMILY		REV N