

P/N: VS70-2

Copyright

© 2015, FLIR Systems, Inc.

All rights reserved worldwide. Names and marks appearing herein are either registered trademarks or trademarks of FLIR Systems and/or its subsidiaries. All other trademarks, trade names or company names referenced herein are used for identification only and are the property of their respective owners.

Document identity

Publ. No.: VS70-2

Release:

Commit: 29700

Language: en-US

Modified: 2015-10-16

Formatted: 2015-10-20

Website

<http://www.flir.com>

Customer support

<http://support.flir.com>

Disclaimer

Specifications subject to change without further notice. Camera models and accessories subject to regional market considerations. License procedures may apply. Products described herein may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions.



The Small Opening Short Focus Combo (Wired) kit includes the VS70, a base kit, and a 5.8 mm short-focus camera on a 1 m semi-rigid cable. Built for close-up inspections.

SAP description	Small Opening Short Focus Combo (Wired)
Kit contents	VS70 + VSC5.8-1RM
VS70 main unit general data	
LCD screen	145 mm (5.7"), 135 mm (5.3") viewable
Active matrix	Active matrix, 640 × 480 pixels
Memory type	SD card 4 GB included (32 GB maximum)
Compression format	MPEG4
Still image format	JPEG (640 × 480 pixels)
Video recording format	AVI (640 × 480 pixels)
Video output format	NTSC and PAL, frame rate 30 fps
Multi-language menu	Yes
Receiver frequency	2.4 GHz
Receiver sensitivity	-87 dBm (SNR = 42 dB, $F_{mod} = 15$)
Data/video	Mini USB 1.1 and AV out
Audio	Earphone plug, 3.5 mm, 4 rings
Speaker	15 mm, 32 Ω, 20 Hz to 20 kHz
Microphone	Boom microphone 6 mm × 5 mm (0.24" × 0.2"), total length 10 cm (3.9"), wire length 1.2 m (3.9')
Tripod mount	On rear, accepts standard tripod screw
Certifications	FCC, CE
Warranty	2 years, see website for details



FLIR VS70: Small Opening Short Focus Videoscope Combo

P/N: VS70-2

© 2015, FLIR Systems, Inc.
#VS70-2; r. /29700; en-US

VS70 main unit power system	
Battery	3.7 V rechargeable lithium polymer
Battery life	6-8 hours
Power adapter	100–240 V input/5 V DC output
Battery status indication	Progressive with auto power off (APO)
VS70 main unit environmental data	
IP rating	67
Drop test	2 m
Operating temperature	–10 to 60°C (14 to 140°F)
Operating humidity	80% maximum
Storage temperature	–40 to 80°C (–40 to 176°F)
VS70 main unit physical data	
Product weight	1.57 kg (3.46 lb.), including batteries
Product dimensions	241 mm × 178 mm × 70 mm (9.5" × 7" × 2.75")
Material	PC-ABS, rubber hand grip, nylon strap
Color	Gray and black
Camera VSC58-1RM general data	
SAP description	5.8 mm camera with 1 m SR probe—VGA via SF
Compatible main unit	VS70
Compatible wireless handset	VST
Compatible cameras	N/A
Diameter	5.8 mm
Resolution	VGA (640 × 480 pixels)
Probe length	1 m
Focal length	20–60 mm
Field of view	56°
Warranty	2 years
Imaging sensor	CMOS
Video format	NTSC
Brightness control	Manual with variable options
Lamp type	LED
Operating temperature	–10°C to 50°C (14 to 122°F)
Shipping information	
Packaging type	Brown shipping box over hard case
Packaging contents	VS70 main unit, VSC58-1RM (5.8 mm camera with 1 m SR probe—VGA via SF), VSA-58 (5.8 mm camera accessories: mirror, anti-snag tip, magnet), patch cable, 4 GB SD card, USB/video out cables, power adapters, vehicle charger, headset, neck strap, cleaning kit, VS-HC (VS70 hard case with camera storage), and user manual (printed English and translated on CD)



FLIR VS70: Small Opening Short Focus Videoscope Combo

P/N: VS70-2

© 2015, FLIR Systems, Inc.

#VS70-2; r. /29700; en-US

Shipping information	
Packaging weight	7.5 kg
Packaging dimensions (H x W x L)	53 cm x 43.5 cm x 22 cm
Carton weight	16 kg
Carton dimensions (H x W x L)	55 cm x 46.5 cm x 46 cm
Carton quantity	2
EAN-13	0793950400739
UPC-12	793950400739
Country of origin	TW
Tariff code	9013809000
Technical support	
Website	http://support.flir.com
E-mail	TMsupport@flir.com
Phone	855-499-3662
Repairs	repair@flir.com
Documentation	
Manual languages (on CD and web)	Czech, Danish, German, Greece, English (US), Spanish (Spain), Finnish, French (France), Hungarian, Italian, Japanese, Korean, Bokmal Norwegian (Norway), Dutch Flemish (Netherlands), Polish, Portuguese (Portugal), Russian, Swedish, Chinese, Chinese (Taiwan)
Suggested cameras and accessories	
VST	Wireless 2.4 Ghz VS70 transmitter
VSA2-1-W	Wireless two-way 6 mm articulated camera with 1 m probe
VSC65-17S	17" stainless steel rigid probe
Compatible cameras full list	
VSA2-2M-W	Wireless two-way 6 mm articulated camera with 2 m probe via SF
VSA2-2-W	Wireless two-way 6 mm articulated camera with 2 m probe
VSA2-1M-W	Wireless two-way 6 mm articulated camera with 1 m probe via SF
VSA2-2	Two-way 6 mm articulated camera with 2 m probe
VSA2-2M	Two-way 6 mm articulated camera with 2 m probe via SF
VSA2-1	Two-way 6 mm articulated camera with 1 m probe
VSA2-1M	Two-way 6 mm articulated camera with 1 m probe via SF
VSC2-58-1FM	Two-channel camera, 5.8 mm diameter 1 m probe
VSC58-30M	5.8 mm camera with 30 m FG probe—QVGA via SF







FLIR VS70: Small Opening Short Focus Videoscope Combo

P/N: VS70-2

© 2015, FLIR Systems, Inc.
#VS70-2; r. /29700; en-US

Compatible cameras full list	
VSC58-20M	5.8 mm camera with 20 m FG probe—QVGA via SF
VSS-30	30 m plumbing spool
VSS-20	20 m plumbing spool
VSC28	28 mm camera head for spool
VSC25	25 mm camera head for spool
VS-BR25	Centering brush for VS70 camera probes
VS-BR28	Centering brush for VS70 camera probes
VS-RB	Replacement centering brush
VSC65-12S	12" stainless steel rigid probe
VSC41-2RM	4.1 mm camera with 2 m SR probe—QVGA via SF
VSC39-1FM	3.9 mm camera with 1 m flex probe—QVGA via SF
VSC58-2R	5.8 mm camera with 2 m SR probe—VGA via LF
VSC58-2RM	5.8 mm camera with 2 m SR probe—VGA via SF
VSC58-1R	5.8 mm camera with 1 m SR probe—VGA via LF
VSC58-1RM	5.8 mm camera with 1 m SR probe—VGA via SF
VSC80-2R	8 mm camera with 2 m SR probe—VGA via LF
VSC80-1R	8 mm camera with 1 m SR probe—VGA via LF

© 2014, FLIR Systems, Inc. All rights reserved worldwide. No part of this drawing may be reproduced, stored in a retrieval system, or transmitted in any form, or by any means, electronic, mechanical, photocopying, recording, or otherwise, without written permission from FLIR Systems, Inc. Specifications subject to change without further notice. Dimensional data is based on nominal values. Products may be subject to regional market considerations. License procedures may apply. Product may be subject to US Export Regulations. Please refer to exportquestions@flir.com with any questions. Diversion contrary to US law is prohibited.

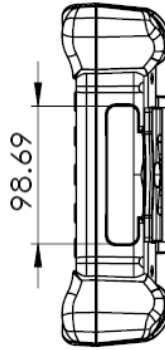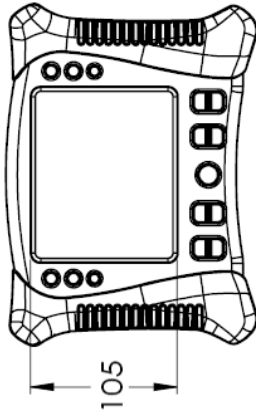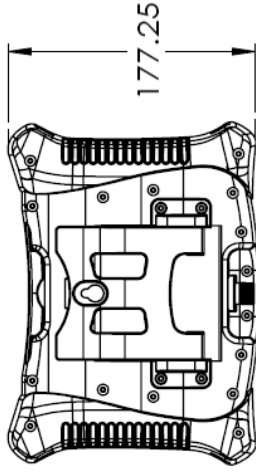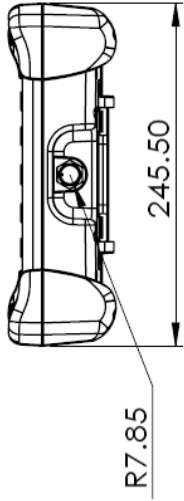

Modified Date Monday, April 21, 2014	Modified By T&M Engineering
Description FLIR VS70, Units in mm	

