

FIREFLY®

FUSE TOOL VOLTAGE DETECTOR

TEquipment^{USA}
.NET
An Interworld Highway, LLC Company
Call Us 1.877.571.7901



FireFly® Fuse Tool Voltage Detector – Minimize Work Time, Maximize Work Safety

The FireFly® Fuse Tool Voltage Detector, model FTVD-15, combines a fuse tool, voltage detector and spotlight in one single product, saving time and adding an extra level of safety while working on distribution lines. The voltage detection function will check for voltage on the line - red LEDs will flash and an audible alarm is activated when voltage is detected. Then use the Fuse Tool function to open and close the fuse or switch. Bright white spotlights located on both the top and front of the tool will provide illumination at night or in the dark for better visibility and added safety. Get the work done three times as fast with the FireFly® Fuse Tool Voltage Detector!

HDE HD ELECTRIC COMPANY
A Textron Company


FIREFLY®

FUSE TOOL VOLTAGE DETECTOR



- Single range voltage detector increases safety by alerting linemen to an energized system
- Compact size allows for multiple uses without overexertion
- The FireFly® Fuse Tool Voltage Detector will provide an audible and visual alarm upon making contact with an energized conductor
- Bright white LED spotlights eliminate the need for secondary lighting
- Combination of voltage detector, fuse puller and spotlights increases work efficiency and reduces tool load

FTVD-15 FUSE TOOL VOLTAGE DETECTOR

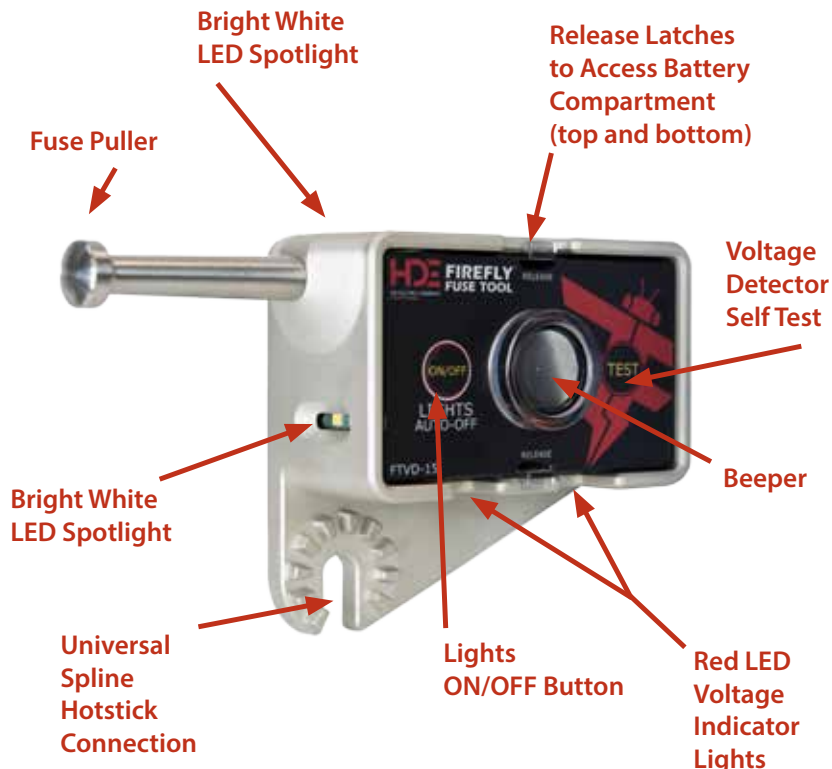

ORDERING INFORMATION

| | |
|-----------------------------|---|
| FTVD-15 | Fuse Tool Voltage Detector; Includes FTVD-15 and FTVD-BG Carrying Bag |
| FTVD-15/K01 | Fuse Tool Voltage Detector Kit; Includes FTVD-15, PT-FTVD Tester and FTVD-BG Carrying Bag |
| PT-FTVD | Proof Tester® Fuse Tool Voltage Detector Tester |
| FTVD-BG | Carrying Bag; Holds FTVD-15 and PT-FTVD |
| S-4H | 4' Fixed Length Fiberglass Hotstick |
| S-6H | 6' Fixed Length Fiberglass Hotstick |
| Telescopic Hotsticks | Fiberglass Extension Hotsticks available, contact factory for more information |

The use of a hotstick is required.



FTVD-15



FTVD-15/K01



PT-FTVD



FTVD-BG

| SPECIFICATIONS | |
|--------------------------------|---|
| DIMENSIONS | Length: 6 in. (15cm) Width: 1.2 in. (3cm) Height: 6 in. (15cm) |
| WEIGHT | 1 lb. (454g) |
| BATTERY LIFE | Voltage detection: up to 40 hours continuous alert White spotlights: up to 8 hours continuously |
| BATTERY | 3V lithium, ANSI-5018LC, IEC-CR17345 Four are required - two for voltage detector and two for white LED spotlights |
| VOLTAGE DETECTION RANGE | FTVD-15 voltage range is 4-12kV; other voltage ranges available from 4kV to 35kV system voltage, 50/60Hz |