


Specification Sheet

Part Number: 553-50038

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

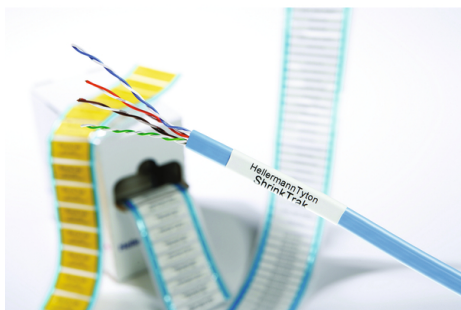

Article Number 553-50038

Type HST24-8BK

Color Black (BK)

Quantity Per box

Product Description HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

Short Description ShrinkTrak Labels, 1-Sided, Unslit, 1.0" (25.4mm), PO-X, Black, 250/box

Global Part Name HST24-8BK-PO-X-BK

Variant Thin-Wall

Width W (Imperial) 1.9

Width W (Metric) 48.26

Thickness T (Imperial) .003

Thickness T (Metric) .0762

Height H (Imperial) 1.69

Height H (Metric) 42.92

Width of Liner (Metric) 76.2

Width of Liner (Imperial) 3.0

Outside Diameter OD (Imperial) 1.0

Outside Diameter OD (Metric) 25.4

Outside Diameter Max (Imperial) 1.0

Outside Diameter Max (Metric) 25.4

Wall Thickness WT (Imperial) 0.039

Wall Thickness WT (Metric) 0.99

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531 MIL-STD-202G Method 215K
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	UL 224 125 °C 600V VW-1
Package Quantity (Imperial)	250
Package Quantity (Metric)	250
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50033

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

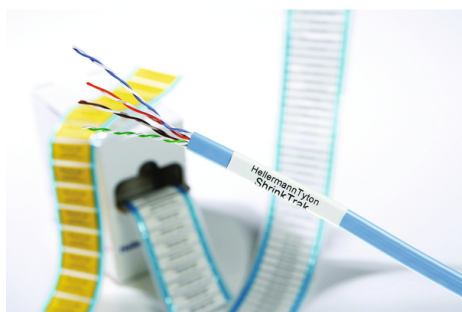

Article Number 553-50033

Type HST18-6BK

Color Black (BK)

Quantity Per box

Product Description HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

Short Description ShrinkTrak Labels, 1-Sided, Unslit, 0.75" (19.05mm), PO-X, Black, 250/box

Global Part Name HST18-6BK-PO-X-BK

Variant Thin-Wall

Width W (Imperial) 1.9

Width W (Metric) 48.26

Thickness T (Imperial) .003

Thickness T (Metric) .0762

Height H (Imperial) 1.2

Height H (Metric) 30.48

Width of Liner (Metric) 76.2

Width of Liner (Imperial) 3.0

Outside Diameter OD (Imperial) 0.75

Outside Diameter OD (Metric) 19.05

Outside Diameter Max (Imperial) 0.75

Outside Diameter Max (Metric) 19.05

Wall Thickness WT (Imperial) 0.036

Wall Thickness WT (Metric) 0.914

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	MIL-STD-202G Method 215K SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	UL 224 125 °C 600V VW-1
Package Quantity (Imperial)	250
Package Quantity (Metric)	250
Customs Number	3917320000

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)


Specification Sheet

Part Number: 553-50028

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

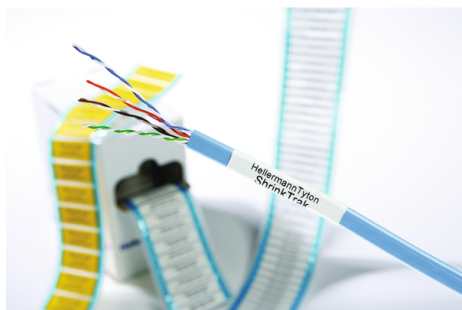

ShrinkTrak Labels, 1-Sided, Unslit, 0.5" (12.7mm), PO-X, Black, 250/box

Article Number 553-50028

Type HST12-4BK

Color Black (BK)

Quantity Per box

Product Description HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

Short Description ShrinkTrak Labels, 1-Sided, Unslit, 0.5" (12.7mm), PO-X, Black, 250/box

Global Part Name HST12-4BK-PO-X-BK

Variant Thin-Wall

Width W (Imperial) 1.9

Width W (Metric) 48.26

Thickness T (Imperial) .003

Thickness T (Metric) .0762

Height H (Imperial) 0.77

Height H (Metric) 19.55

Width of Liner (Metric) 76.2

Width of Liner (Imperial) 3.0

Outside Diameter OD (Imperial) 0.5

Outside Diameter OD (Metric) 12.7

Outside Diameter Max (Imperial) 0.5

Outside Diameter Max (Metric) 12.7

Wall Thickness WT (Imperial) 0.033

Wall Thickness WT (Metric) 0.84

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531 MIL-STD-202G Method 215K
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	SAE - AMS - DTL-23053/5 Class 1 and 3 UL 224 125 °C 600V VW-1 SAE - AS81531
Package Quantity (Imperial)	250
Package Quantity (Metric)	250
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50023

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

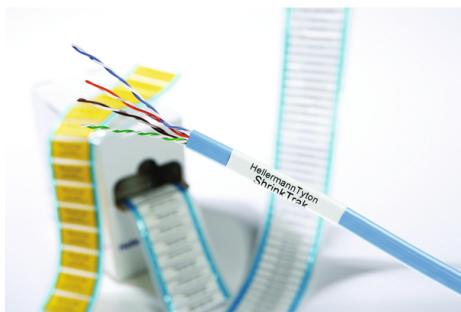

ShrinkTrak Labels, 1-Sided, Unslit, 0.38" (9.52mm), PO-X, Black, 250/box

Article Number 553-50023

Type HST9-3BK

Color Black (BK)

Quantity Per box

Product Description HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

Short Description ShrinkTrak Labels, 1-Sided, Unslit, 0.38" (9.52mm), PO-X, Black, 250/box

Global Part Name HST9-3BK-PO-X-BK

Variant Thin-Wall

Width W (Imperial) 1.9

Width W (Metric) 48.26

Thickness T (Imperial) .003

Thickness T (Metric) .0762

Height H (Imperial) 0.597

Height H (Metric) 15.16

Width of Liner (Metric) 76.2

Width of Liner (Imperial) 3.0

Outside Diameter OD (Imperial) 0.375

Outside Diameter OD (Metric) 9.52

Outside Diameter Max (Imperial) 0.375

Outside Diameter Max (Metric) 9.52

Wall Thickness WT (Imperial) 0.031

Wall Thickness WT (Metric) 0.79

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AMS-DTL-23053/5 Class 1 and 3 MIL-STD-202G Method 215K SAE-AS81531
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	SAE - AS81531 SAE - AMS - DTL-23053/5 Class 1 and 3 UL 224 125 °C 600V VW-1
Package Quantity (Imperial)	250
Package Quantity (Metric)	250
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50015

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

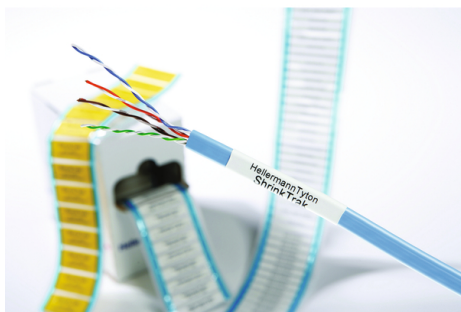

ShrinkTrak Labels, 1-Sided, Unslit, 0.25" (6.35mm), PO-X, Black, 250/box

Article Number 553-50015

Type HST6-2BK

Color Black (BK)

Quantity Per box

Product Description HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

Short Description ShrinkTrak Labels, 1-Sided, Unslit, 0.25" (6.35mm), PO-X, Black, 250/box

Global Part Name HST6-2BK-PO-X-BK

Variant Thin-Wall

Width W (Imperial) 1.9

Width W (Metric) 48.26

Thickness T (Imperial) .003

Thickness T (Metric) .0762

Height H (Imperial) 0.42

Height H (Metric) 10.67

Width of Liner (Metric) 76.2

Width of Liner (Imperial) 3.0

Outside Diameter OD (Imperial) 0.25

Outside Diameter OD (Metric) 6.35

Outside Diameter Max (Imperial) 0.25

Outside Diameter Max (Metric) 6.35

Wall Thickness WT (Imperial) 0.028

Wall Thickness WT (Metric) 0.71

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	SAE-AMS-DTL-23053/5 Class 1 and 3 SAE-AS81531 MIL-STD-202G Method 215K
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	SAE - AS81531 SAE - AMS - DTL-23053/5 Class 1 and 3 UL 224 125 °C 600V VW-1
Package Quantity (Imperial)	250
Package Quantity (Metric)	250
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).


Specification Sheet

Part Number: 553-50008

Slide Slit and optional center slits for easy wire insertion.
Smooth surface for clean and legible printing.

Supplied on a ladder style carrier so that markers can be kitted after printing.

A 3:1 shrink ratio means fewer skews as each marker covers a wider range of wire diameters.

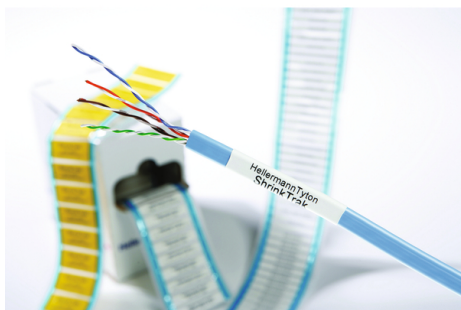

ShrinkTrak Labels, 1-Sided, Unslit, 0.187" (4.74mm), PO-X, Black, 250/box

Article Number	553-50008
Type	HST4.8-1.6BK
Color	Black (BK)
Quantity Per	box

Product Description

HellermannTyton's ShrinkTrak heat shrinkable markers make it easy to mark wire, cable and other components. The military approved heat shrink tubing is flattened and assembled in a ladder style carrier system for easy printing using a thermal transfer printer. The ladder system creates a kit of markers that can be sorted, removed and applied in any order thus saving time, labor and speeding production.

Short Description

ShrinkTrak Labels, 1-Sided, Unslit, 0.187" (4.74mm), PO-X, Black, 250/box

Global Part Name HST4.8-1.6BK-PO-X-BK

Variant Thin-Wall

Width W (Imperial) 1.9

Width W (Metric) 48.26

Thickness T (Imperial) .003

Thickness T (Metric) .0762

Height H (Imperial) 0.312

Height H (Metric) 7.92

Width of Liner (Metric) 76.2

Width of Liner (Imperial) 3.0

Outside Diameter OD (Imperial) 0.187

Outside Diameter OD (Metric) 4.74

Outside Diameter Max (Imperial) 0.187

Outside Diameter Max (Metric) 4.74

Wall Thickness WT (Imperial) 0.026

Wall Thickness WT (Metric) 0.66

Material	Polyolefin, cross-linked (PO-X)
Material Shortcut	PO-X
US MIL SPEC	MIL-STD-202G Method 215K SAE-AS81531 SAE-AMS-DTL-23053/5 Class 1 and 3
Flammability	UL 224 VW-1
Halogen Free	No
UV Resistant (Yes/No)	No
Operating Temperature	-67°F to +275°F (-55°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	SAE - AMS - DTL-23053/5 Class 1 and 3 UL 224 125 °C 600V VW-1 SAE - AS81531
Package Quantity (Imperial)	250
Package Quantity (Metric)	250
Customs Number	3917320000
Labels per Column	1

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).