

Specification Sheet

Part Number: LTP16-M20-C

UL Listed to UL514B standards.


Multipart compression fitting includes nylon seal for ingress protection ratings to IP66 + IP67 + IP68 + IP69

Durable nickel plated brass material provides high mechanical strength and resistance to oil & corrosion.

Suitable for knockouts or NPT / Metric threaded entries

Interchangeable with all LTP series liquid-tight metallic conduits made to UL360 sizes

Suitable for use in hazardous locations as per NEC Article 501 (B)(2): Class I, Division 2; Article 502 (A)(2) & (B)(2) Class II, Division 1 and 2; and Article 503 (A)(3) & (B)(3) Class III, Divisions 1 and 2.

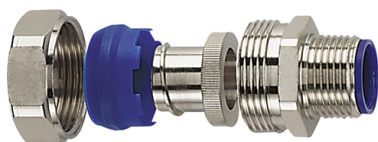

HelaGuard Liquid-Tight Flex Met Comp Fitting, NPB, Ins Throat, Straight, M20 Metric Thread, 0.38" (16mm) Dia, Metal, 10/pkg

Article Number	166-90608
----------------	-----------

Type	LTP16-M20-C
------	-------------

Color	Metal (ML)
-------	------------

Quantity Per	pack
--------------	------

Product Description	Multipart straight compresssion fitting with fixed external NPT or Metric threads for liquid-tight performance. Metric threaded fittings supplied with insulated throat which protects conductors from mechanical damage caused by vibration. Constructed with nickel plated brass components that resists corrosion, ensures high mechanical strength and electrical continuity. UL Listed and suitable for hazardous locations as defined by NEC Article 501. Fitting comprised of body, nut, grounding ferrule and nylon compression seal. For use with LTP series liquid tight metallic conduit.
Short Description	HelaGuard Liquid-Tight Flex Met Comp Fitting, NPB, Ins Throat, Straight, M20 Metric Thread, 0.38" (16mm) Dia, Metal, 10/pkg
Global Part Name	LTP16-M20-C-NPB/PA6-ML
Length L (Imperial)	1.34
Length L (Metric)	34.0
Variant	Straight
Height H (Imperial)	1.02
Height H (Metric)	26.0
Nominal Diameter (Imperial)	0.38
Nominal Diameter (Metric)	16.0
Material	Polyamide 6 (PA6) Nickel Plated Brass (NPB)
Material Shortcut	NPB PA6

Halogen Free	Yes
UV Resistant (Yes/No)	No
Operating Temperature	-58°F to +275°F (-50°C to +135°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
UL Listed (US and Canada)	Yes
UL Listed (US)	Yes
Package Quantity (Imperial)	10
Package Quantity (Metric)	10
Customs Number	8547900030

About HellermannTyton

HellermannTyton is a global manufacturer of cable management and identification solutions for automotive, solar, electrical, construction, industrial automation, broadband and other OEM markets. The company's integrated approach to product design, sustainability, production, quality assurance and delivery is optimized to benefit local and global customers. HellermannTyton operates in 39 countries, with North American headquarters in Milwaukee, Wisconsin. (www.hellermann.tyton.com).

© 2023 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)