

## Specification Sheet


Part Number: 170-03161

Self extinguishing material does not melt and is unaffected by most acids, and provides excellent thermal stability against direct flame.

Provides excellent thermal stability.

Meets FMVSS 302 specifications for use in automotive engineering.

Material cuts with ordinary scissors which reduces assembly time.

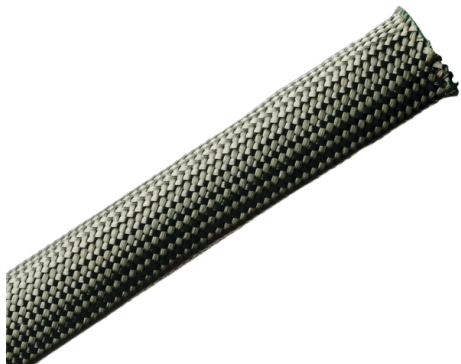

Nomex® High Temperature Woven Sleeveing, 0.5" Dia, Green, 100 ft/bulk reel

Article Number	170-03161
Type	BSNMX125B
Color	Green (GN)
Quantity Per	pack
Product Description	A densely woven aramid fiber sleeveing, this soft and flexible material is self extinguishing and can withstand temperatures reaching up to 662°F.
Short Description	Nomex® High Temperature Woven Sleeveing, 0.5" Dia, Green, 100 ft/bulk reel
Global Part Name	BSNMX125B-PMPI-GN

Length L (Imperial) 100.0

Length L (Metric) 30.48

Bundle Diameter Min (Imperial) 0.31

Bundle Diameter Min (Metric) 7.9

Bundle Diameter Max (Imperial) 0.63

Bundle Diameter Max (Metric) 16.0

Diameter D (Imperial) 0.50

Diameter D (Metric) 12.7

Nominal Diameter (Imperial) 0.5

Nominal Diameter (Metric) 12.7

Material Polyaramid Polymetaphenylene Isophthalamide (PMPI)

Material Shortcut PMPI

Flammability UL VW-1

Halogen Free Yes

UV Resistant (Yes/No) No

Use Conditions	For Indoor Use Only
Operating Temperature	-320°F to +662°F (-196 °C to +350 °C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	100
Package Quantity (Metric)	30.48
Customs Number	5808100000

7930 N. Faulkner Road, Milwaukee, WI 53224  
Phone: (800) 537-1512 | Email: [corp@htamericas.com](mailto:corp@htamericas.com)

© 2026 HellermannTyton. All Rights Reserved.

[Contact Us](#)   [RoHS/WEEE Compliance](#)   [Privacy Policy](#)   [Cookie Policy](#)   [Terms and Conditions](#)