Specification Sheet

Part Number: TAG68T1-336

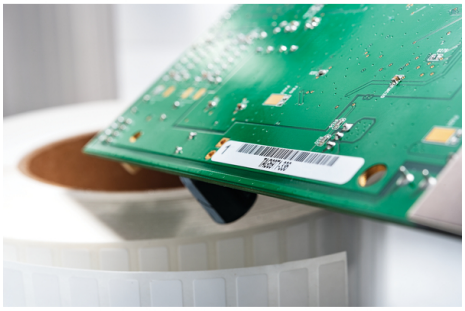

White polyester is glossy, allowing for the highest resolution and print contrast.

The acrylic-based adhesive bonds to a wide variety of substrates and can withstand high temperatures long term.

Thermal Transfer Adhesive Labels, 3.8 x 0.275", 1 Across, Polyester, White, 10,000/roll

Article Number	596-00040
Type	TAG68T1
Color	White (WH)
Quantity Per	pack
Product Description	HellermannTyton white polyester labels are ideal for marking small electrical and electronic components, such as EPROMS', Integrated circuits, as well as the circuit board itself. Printed labels can withstand the soldering process and survive flux removal when the board is washed. HellermannTyton's 336 material is designed for use on flat surfaces and can also be used to identify connectors, buttons and just about anything requiring permanent, durable, high temperature and UV resistant marking.
Short Description	Thermal Transfer Adhesive Labels, 3.8 x 0.275", 1 Across, Polyester, White, 10,000/roll

Global Part Name	TAG68T1-336-WH
Width W (Imperial)	3.8
Width W (Metric)	96.5
Thickness T (Metric)	64.0
Height H (Imperial)	0.275
Height H (Metric)	6.98
Width of Liner (Metric)	101.6
Width of Liner (Imperial)	4.0
Material	Type 336, Polyester (336)
Material Shortcut	336
Adhesive	Acrylic
Halogen Free	Yes
UV Resistant (Yes/No)	No
Use Conditions	For Indoor Use Only
Adhesive Operating Temperature	-40°F to +302°F (-40°C to +150°C)

Operating Temperature	-40°F to +302°F (-40°C to +150°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Certification/Specification	UL-Recognized
UL Recognized (US)	Yes

Package Quantity (Imperial)	10000
Package Quantity (Metric)	10000
Customs Number	3919102055
Labels per Column	1
Labels per Row	1

7930 N. Faulkner Road, Milwaukee, WI 53224
Phone: (800) 537-1512 | Email: corp@htamericas.com