

# ACT-32H Handheld Transmitter

## Key Features

- Innovatively designed metal housing in MIPRO's distinctive aesthetic and ergonomic style.
- Interchangeable capsule module with premium condenser or dynamic options for easy and fast changeovers. The unique multi-layered metal grille protects the capsule against impact, rolling and pop noise, ensuring clarity of sound. The upper grille is easy to detach for cleaning and hygiene practice.
- Patented capsule suspension design virtually eliminates vibration and handling noises.
- Built-in high-efficiency antenna.
- Backlit LCD displays all operational parameter information.
- World's first ACT™ function provides precise and rapid frequency sync to the receiver.



## Microphone Capsules


<b>MU-39</b>	Dynamic Capsule
<b>MU-59</b>	Professional Dynamic Capsule
<b>MU-70</b>	Condenser Capsule
<b>MU-80</b>	Condenser Capsule
<b>MU-90</b>	Condenser Capsule

## Accessories

<b>MS-20</b>	Desktop Microphone Tripod
<b>MD-20</b>	Handheld Transmitter Microphone Holder
<b>RH-77a</b>	Multi-Colored Rings
<b>SW-20</b>	Foam Windscreens

## Technical Specifications

Frequency Range	UHF 480 – 934 MHz
Bandwidth	24 MHz
Oscillation Mode	PLL Synthesized
Channel Set-Up	ACT Sync
RF Output Power	10 ~ 30mW (country dependent)
Deviation	< ± 40 kHz
Spurious Emissions	< -55 dBc
LCD Display	Group, Channel, Battery status & error codes
Max. SPL	140 dB SPL
Battery Type	2 × AA alkaline
Operating Time	Min. 12 hours (Low Power)
Current Consumption	Approx. 92 mA
Dimensions (Ø × L)	51 × 234 mm   2 × 9.2"
Net Weight	Approx. 251 g   8.9 oz

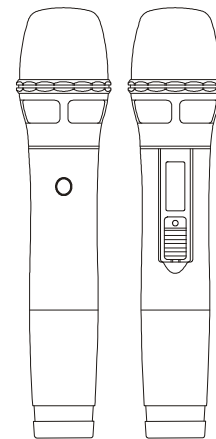

### MIPRO Electronics Co., Ltd

Headquarters: 814 Pei-kang Road, Chiayi, 60096, Taiwan  
Tel: +886.5.238.0809 | Fax: +886.5.238.0803  
www.mipro.com.tw | mipro@mipro.com.tw