

BITE Accessories For Improved Battery Maintenance



- Enhances the capabilities of the BITE product line
- Designed for unique application situations
- The right tools for battery testing
- Facilitates complete battery testing

Megger offers a complete line of accessories to enhance the capabilities of the BITE product line.

PROBE EXTENSION KIT FOR BITE2/2P

These probe extensions are mounted on the end of the BITE2/2P receiver pistols. This allows the receiver to measure either battery cells and/or intercell connection straps located in small, tight spaces. Cat. No. 34943-000 extensions can reach up to 12 inches.

Cat. No.: 34943-000
 Dimensions: 18.15 x 1.95 x 1.30"
 (461 x 50 x 33 mm)
 Weight: 1.88 lbs (0.853 kg)
 Material: G10 / FR4 Gardlite glass fabric tube
 Includes: (2) 12 in. extension rods
 (2) rod - receiver adapter assemblies
 (2) straight probe tips
 (2) hooked probe tips
 (2) right-angle probe tips
 (2) 45° probe tips



Cat. No. 34943-000




Cat. No. 34943-002

PROBE EXTENSION KIT FOR BITE2/2P

These probe extensions are mounted on the end of the BITE2/2P receiver pistols. This allows the receiver to measure either battery cells and/or intercell connection straps located in small, tight spaces.

Cat. No. 34943-001 extensions can reach up to 24 inches.

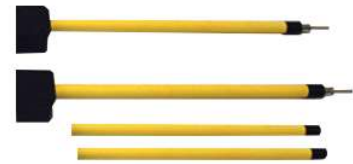

Cat. No.: 34943-001
 Dimensions: 29.49 x 1.95 x 1.30"
 (747 x 50 x 33 mm)
 Weight: 2.30 lbs (1.04 kg)
 Material: G10 / FR4 Gardlite glass fabric tube
 Includes: (4) 12 in. extension rods
 (2) rod - receiver adapter assemblies
 (2) straight probe tips
 (2) hooked probe tips
 (2) right-angle probe tips
 (2) 45° probe tips

PROBE EXTENSION KIT FOR BITE2/2P

These probe extenders are mounted on the 34943-000 extension kit, and add an additional 12 inches to it.

Cat. No.: 34943-002
 Length: "12" (305 mm), extends to 27"
 (686 mm) Each rod
 Weight: 6.74 oz (191 g)
 Material: G10 / FR4 Gardlite glass fabric tube
 Includes: (2) 12 in. extension rods

BITE Accessories For Improved Battery Maintenance

10-PIECE LIGHTED PROBE EXTENSION KIT FOR BITE3

These lighted probe extensions are mounted on the end of the BITE3 pistol probe. This allows the BITE3 to measure either battery cells and/or intercell connection straps located in small, tight spaces. Cat. No. 35865 extensions can reach up to 27 inches.



Cat. No.: 35865
 Length: 12" (305 mm), extends to 27" (686 mm)
 Weight: 1.0 lbs (0.454 kg)
 Material: ABS plastic
 Includes: (2) 12 in. extension rods
 (2) 6 in. extension rods
 (2) rod - receiver adapter assemblies
 (2) pointed tips

CT MINIATURE CURRENT SENSOR FOR BITE2/2P, 1/2 IN. OPENING, 2-1/2 FT. LEAD

The mini CT is plugged into the BITE2/2P receiver and used to measure the test current from the BITE2/2P transmitter. Its small size allows for use in confined areas where space is limited.



Cat. No.: 246034
 Dimensions: 4.44 x 1.34" (113 x 34 mm)
 Weight: 5.6 oz (159 g)
 Current Range: 0 A to 150 A

CT EXTENSION CABLE FOR BITE2/2P

The CT extension cable connects the CT, used to measure the test current, and the BITE2/2P receiver, increasing its length to 20 ft. This is ideal for long battery strings.



Cat. No.: 33864-2
 Length: 20 ft. (6 m)
 Gauge: 22 AWG
 Material: Polypropylene

BAR CODE SCANNER WITH PREPRINTED CODE SHEET FOR BITE2/2P

The bar code scanner identifies the battery string to be tested by the BITE2, tagging the individual test data to a particular battery string.



Cat. No.: 1013-163
 Dimensions: 6.7 x 4.1 x 2.7" (170 x 104 x 67 mm)
 Weight: 5.4 oz (153 g) (without cable)

TIP KIT FOR BITE3

The tip kit contains replacement tips for the BITE3 pistol probes.

Cat. No.: BI-10017
 Dimensions: 1.42 x .156" (36 x 40 mm)
 Material: Gold plated over nickel
 Includes: (4) waffle tips



QUICK DISCONNECT LEAD SET FOR BITE3

The quick disconnect lead allows the BITE3 to be used in strings utilizing spade lugs in their configuration.

Cat. No.: BI-10006
 Length: 54" (1.37 m) (typical)
 Tip Type: Female spade terminal



KELVIN CLIP LEAD SET FOR BITE3

The Kelvin clip allows the BITE3 to be clipped directly to the battery terminals and straps when performing the measurements.

Cat. No.: BI-10005
 Length: 54" (1.37 m) (typical)
 Tip Type: Kelvin



AMP/BURNDY LEAD SET FOR BITE3

The burndy leads allow the BITE3 to be used in strings utilizing 2-pin amp connectors in their configuration.

Cat. No.: BI-10004
 Length: 54" (1.37 m) (typical)
 Tip Type: 2-pin male amp connector



DUAL POINT LEAD SET, 6 FT.

The dual point lead set is designed for measuring battery straps up to six-ft long for battery rooms with split string design. They are six feet from probe to probe.

Cat. No.: 36616
 Length: Probe to unit, 84" (2.13 m) (typical)
 Probe to probe, 80" (2 m) (typical)
 Tip Type: Dual-tip waffle



BITE Accessories For Improved Battery Maintenance

USB/RS232 ADAPTER FOR BITE3

The USB/RS232 adapter connects to the BITE3 serial port and the PC USB port. The adapter allows the BITE3 to communicate with PCs that do not have serial ports.



Cat. No.: 35871
Length: 3-ft (0.91 m) extension cable
Weight: 2 oz (56.7 g)

SPARE BATTERY FOR BITE3

Cat. No.: 6121-492
Type: Li-ion battery pack



8-CHANNEL DIGITAL HYDROMETER KIT FOR BITE SERIES

The digital hydrometer measures the specific gravity of the battery electrolyte. The kit includes a data logger that allows the operator to transfer the recorded hydrometer data into the BITE battery report using the PowerDB software.



Cat. No.: 2001-692
Dimensions: 5.5 x 5.4 x 1.0" (140 x 137 x 25.4 mm)
Weight: 12.2 oz (346 g)
Measurement
Density Range: 0 g/cm³ — 3 g/cm³
Operating
Temp. Range: 14° F to 122° F (10° C to 50° C)

CURRENT TRANSFORMER KIT FOR BITE3

The CT kit connects to the BITE3 allowing the measurement of escaped current. This permits impedance testing to be performed on parallel battery strings without the need to sectionalize the string.

Cat. No.: 35873
Dimensions: 2.6 x 7.68 x 14.82" (66 x 195 x 376 mm)
(ID 1.3 in.) (33 mm)
Weight: 14.82 oz (420 g)
Current Range: 0 A to 600 A



HARD-SIDED CARRYING CASE FOR BITE3

The foam cutouts fit the instrument and its accessories.


Cat. No.: 35890
Length: 23 x 16 x 10"
(584 x 406 x 254 mm)
Weight: 8 lbs (3.63 kg)
Material: High-density Polyethylene



POWERDB

Power DB is a powerful software package that operates with the all BITE battery testers.

Power DB allows you to transfer and analyze data from the BITE units and create custom reports with your companies logo. Power DB will allow you to trend voltages, impedances, strap resistances, cell temperature as well as specific gravity. Power DB will display the ripple current, float current, ambient temperature, calculate baseline data as well as having a location for a picture or diagram graphics. IDEAL FOR NERC and FERC requirements! Power DB comes in several versions including the freeware version DB LITE and the Power DB Advanced. The full-version Power DB is a purchased copy that supports all the functions of Power DB LITE plus it operates with almost all Megger products and allows the user to merge data from different products onto one report.



Cat. No.: 1001-381 (PowerDB Lite)

CALIBRATION SHUNTS

The accuracy of all BITEs can be easily checked in the field using one of Megger's NIST-traceable shunts. Simply check the BITE using a shunt in the range of a typical battery impedance value.



Cat. No.	Current Rating	Weight
249003	10 A	11.2 oz.
249004	100 A	9.6 oz.
249005	500 A	16.0 oz
Dimensions:	5.94 x 1.18" (151 x 30 mm)	

BITE Accessories For Improved Battery Maintenance

FLEX CT FOR BITE2 AND BITE3

This Flex CT allows can be used with the BITE2 to measure AC ripple and test current. Will easily fit around large cables and bus bars.

The BITE3 version can be used with parallel strings so there is no need to isolate strings.

Accuracy: 1% of reading +/- 0.2mA
 Power Source: 4 AA Alkaline Batteries NEDA 15A, IEC LR6
 ID: 6 inches (152.4mm)
 Length: Total Cable Length 9 feet (274.3cm)
 Weight: 12oz (340g) with batteries
 Cat No. for BITE2 version: MCCA-100B2
 Cat No. for BITE3 version: MCCA-100B3



BITE3 CONCENTRIC PROBES

Concentric tip probes for the BITE3. These probes can be used to access batteries that have protective caps on them. They can fit in access holes approximately 3mm wide.

Cat. No.: 90037-561
 Tip Length - 11.75mm (½")
 Cat. No.: 90037-928
 Tip Length - 25.4mm (1")



MAINS POWER ADAPTER FOR BITE3

Power the BITE3 off of ac; no need for a battery pack

Cat No. with EU plug: 1003-172
 Cat No. with UK plug: 1003-093
 Cat No. with US plug: 1003-171



ORDERING INFORMATION

Item (Qty)	Cat. No.	Item (Qty)	Cat. No.
Probe extension kit, 12 in. (30 cm) for BITE2 and BITE2P	34943-000	Flex CT (6 inch) for the BITE2	MCCA-100B2
Probe extension kit, 24 in. (60 cm) for BITE2 and BITE2P	34943-001	Flex CT (6 inch) for the BITE3	MCCA-100B3
Extensions, 12 in. (30 cm), pair for BITE2 and BITE2P	34943-002	Lead set, 6 ft (1.8 m) probe to probe	36616
Lighted probe extension kit, 12/27 in. (30/70cm), for BITE3	35865	USB/RS232 adapter for BITE2 and BITE3	35871
Miniature 1/2 in. CT for BITE2 and BITE2P	246034	Spare battery for BITE3	6121-492
CT extension cable, 20 ft (6 m) for BITE2 and BITE2P	33864-2	8 channel digital hydrometer kit	2001-692
Bar code scanner kit (w/preprinted code sheet) for BITE2 and BITE2P	1013-163	Current transformer kit for the BITE3	35873
Tip kit for BITE3	BI-10017	Hard-sided carrying case for BITE3	35890
Quick disconnect lead set, 54 in. (137 cm)	BI-10006	PowerDB Lite	1001-381
Kelvin clip lead set, 54 in. (137 cm)	BI-10005	Calibration shunt, 0.01 Ω current rating 10 A	249003
AMP/Burndy lead set, 54 in. (137 cm)	BI-10004	Calibration shunt, 0.001 Ω current rating 100 A	249004
		Calibration shunt, 0.0001 Ω current rating 500 A	249005
		Mains power adapter for BITE3 w/US plug	1003-171
		Mains power adapter for BITE3 w/ EU plug	1003-172
		Mains power adapter for BITE3 w/UK plug	1003-093
		BITE3 Concentric Probes (Tip Length - 11.75mm (½"))	90037-561
		BITE3 Concentric Probes (Tip Length - 25.4mm (1"))	90039-928

SALES OFFICE

Megger Limited
 Archcliffe Road Dover
 CT17 9EN England
 T +44 (0) 1304 502101
 E UKsales@megger.com

BITE_ACCESSORIES_DS_en_V26

www.megger.com
 ISO 9001
 The word 'Megger' is a registered trademark

Megger[®]