

HD Super Dunnage Shelves — {10.67}


Static load capacity (uniformly distributed)

- 48" (1219mm) shelf: 3,000 lbs. (1361kg).
- 60" (1524mm) shelf: 2,400 lbs. (1089kg).
- For use on HD Super 1.62" (41mm) diameter posts only.
- Removable wire deck.

Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Chrome
18x48	457x1219	35	15.7	1848HDRC
18x60	457x1524	43	19.3	1860HDRC
24x48	610x1219	38	17.1	2448HDRC
24x60	610x1524	47	21.1	2460HDRC

Important: In stationary shelving, stability decreases as the ratio of height to width increases and when heavier loads are placed on upper shelves. Keep units as wide and low as possible, using the dunnage shelf as the bottom shelf. If two dunnage shelves are being used, both should be placed within the lower half of the unit.


Note: Not compatible with Super Erecta or Super Adjustable Super Erecta components.

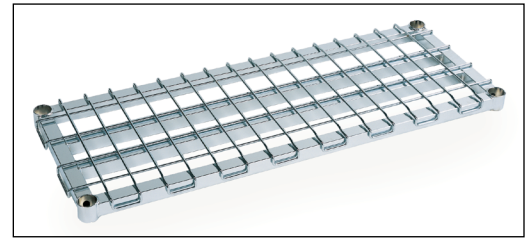

HD Super Dunnage Shelf

HD Super Cantilever Shelf — {10.67}

Width/Length (in.) (mm)		Approx. Pkd. Wt. (lbs.) (kg)		Cat. No. Stainless
12x54	304x1372	11.8	5.3	1254CHS
12x60	304x1524	12.7	5.7	1260CHS

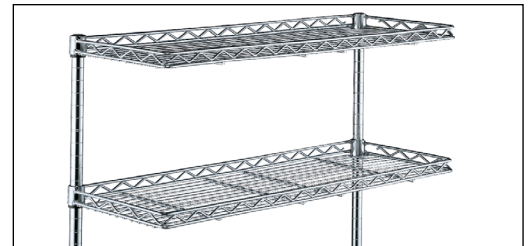

HD Super™ Cantilever Shelf

HD Super Replacement Parts — {10.65}

Replacement HD Super Aluminum Split Sleeves with Zinc Ring
4 pair per bag
Cat. No. 9986HZ



Replacement HD Super™ Aluminum Split Sleeve

Replacement HD Super Plastic Split Sleeves

4 pair per bag
Cat. No. 9985H



Replacement HD Super™ Plastic Split Sleeve

Post Clamps

Cat. No. 9994HZ



Post Clamp

Replacement 5.5" (140mm) Donut Bumpers


Fit 1.62" (41mm) posts only.
Cat. No. 9992H



Replacement 5.5" (140mm) Donut Bumper

3.5" (89mm) Foot Plates

Cat. No. 9993HS

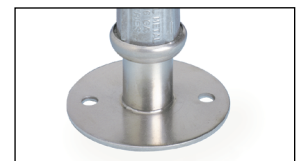

3.5" (89mm) Foot Plate

Wall Mounting Brackets

(not shown)
Cat. No. 9984HZ

✓ Indicates antimicrobial product.