

MULTIMEDIA PROJECTOR EH503



BRIGHT 1080P HD LARGE VENUE PROFESSIONAL INSTALLATION



High resolution 1080p display ensures easy to read text and graphics



Ideal solution for large screen 16:9 video displays



3D at full 1080p resolution with optional RF 3D emitter and glasses



Vertical and horizontal lens shift for maximum installation flexibility



Interchangeable lens options

PROSCENE



Touchboards

205 Westwood Ave, Long Branch, NJ 07740
Phone: 866-94 BOARDS (26273) / (732)-222-1511
Fax: (732)-222-7088 | E-mail: sales@touchboards.com

The perfect solution for professional installation and integration in large board rooms, conference rooms, lecture halls, auditoriums, and houses of worship.

With its powerful 5200 lumens output, remarkable 2000:1 contrast ratio and native 16:9 aspect ratio, the Optoma EH503 delivers bright large-screen presentations, movies, text and graphics with amazing image clarity and superb color reproduction.

Designed for ease of installation and integration, the Optoma EH503 provides vertical and horizontal lens shift, choice of 3 high-quality, high performance optional lenses, comprehensive connectivity including HDMI 1.4a, DisplayPort, DVI-D for digital sources, 3-axis color matching, brightness matching, wired remote, Crestron RoomView for remote monitoring and control, DICOM simulation mode and much more. Built to Optoma's highest quality standards, the Optoma EH503 will deliver peak performance for years to come.

LENS THROW OPTIONS

	Short Throw	Standard Throw	Long Throw
Optoma Part Number	BX-DL080	BX-DL200	BX-DL300
Throw Ratio (Distance/Width)	0.77:1	1.54-1.93:1	1.93-2.89:1
Projection Distance	1.6'-9.8' (0.5-3m)	4.9'-23.0' (1.5-7m)	6.6'-65.6' (2-20m)
Image Size (Diagonal)	28.0"-171" (0.71-4.34m)	34.2"-200" (0.87-5.08m)	30.6"-457" (0.78-11.6m)
Projection Lens	F=2.5, f=11.5 mm, Manual Focus	F=2.46-2.56, f=22.8-28.5 mm, 1.25x Manual Zoom and Focus	F=2.5-3.1, f=28.5-42.75 mm, 1.5x Manual Zoom and Focus
Weight w/ Projector	19.1 lb (8.6 kg)	18.9 lb (8.6 kg)	18.9 lb (8.6 kg)

MULTIMEDIA PROJECTOR — EH503

OPTICAL/TECHNICAL SPECIFICATIONS

Display Technology	Single 0.65" DC3™ DLP® Technology by Texas Instruments™
Native Resolution	HD (1920 x 1080)
Maximum Resolution	WUXGA (1920 x 1200)
Brightness (Typical)	5200 lumens
Contrast Ratio	2,000:1 (full on/full off)
Displayable Colors	1.07 Billion
Lamp Life* and Type	3500/1500 Hours (STD/bright) 370W P-VIP
Projection Method	Front, rear, ceiling mount, table top
Keystone Correction	±15° Vertical
Uniformity	85%
Aspect Ratio	16:9 Native, 4:3 compatible
Lens Shift	Vertical -30% to +50% image height Horizontal ±10% image width
Audio	Two 3-Watt speakers
Noise Level (STD)	37dB
Remote Control	Fully-featured IR remote with the option to hardwire to the projector
Operating Temperature	41–113°F (5–45°C), 85% max humidity, adjustable fan speed for high altitude application
Power Supply	AC Input 100–240V, 50–60Hz, auto-switching
Power Consumption	480W max (bright), 330W (STD), <0.5 Watt (standby)

COMPATIBILITY SPECIFICATIONS


Computer Compatibility	WUXGA, UXGA, SXGA+, WXGA, SXGA, XGA, SVGA, VGA resized, VESA, PC and Mac compatible
Video Compatibility	NTSC, PAL, SECAM, SDTV (480i/576i), EDTV (480p/576p, HDTV (720p, 1080i/p)
3D Compatibility[†]	Supports all HDMI 1.4a mandatory 3D format, side-by-side format and top and bottom format. 3D glasses are needed and sold separately.
Vertical Scan Rate	24–85kHz, 120Hz, 144Hz
Horizontal Scan Rate	15–91kHz
User Controls	Complete on-screen menu adjustments in 26 languages
I/O Connection Ports	Display port, HDMI, DVI-D w/ HDCP, two VGA-in, VGA-out, S-video, composite video, component video, five BNC (RGBHV/YPbPr), two stereo mini jack audio-in, two RCA stereo audio-in, audio-out, 3D VESA port, wired remote, USB-A charging port, RS-232C, RJ45, and 12V trigger
Monitor Loop Through	<i>Monitor:</i> D-Sub 15 pin VGA output (functional in both normal and standby modes) <i>Audio:</i> VAO audio out, HDMI VAO audio out supported (VAO in normal mode, fixed in Standby)

PHYSICAL SPECIFICATIONS

Security	Kensington® lock port, security bar and keypad lock
Weight	18.6 lb (8.4 kg) w/o lens
Dimensions (W x D x H)	16.9" x 7.1" x 13.4" (430 x 181 x 340 mm)

*Lamp-life is dependent on many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.

[†]3D content can be viewed with either RF or DLP Link active shutter glasses when projector is used with a compatible 3D player. RF 3D glasses require the use of an RF 3D emitter and a projector with a 3D VESA Sync port. Please visit www.OptomaUSA.com for more information.

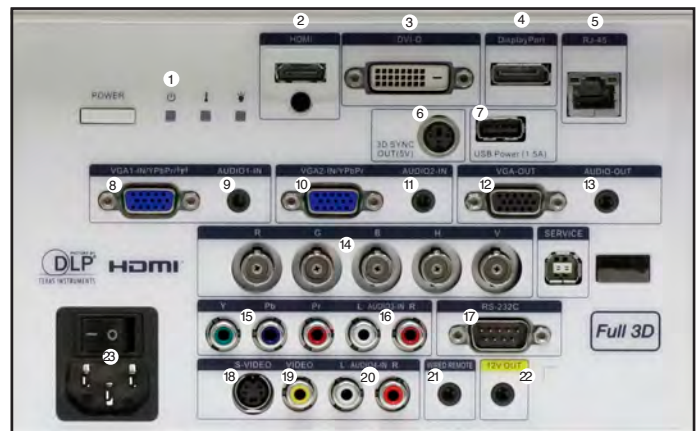

- | | | |
|------------------------|-----------------------|---------------------|
| 1. Power LED Indicator | 9. Audio-In (VGA-1) | 17. RS-232C |
| 2. HDMI | 10. VGA 2-In | 18. S-Video |
| 3. DVI-D | 11. Audio-In (VGA-2) | 19. Composite Video |
| 4. Display Port | 12. VGA-Out | 20. RCA Audio-In |
| 5. RJ45 | 13. Audio-Out | 21. Wired Remote |
| 6. 3D SYNC Out (5V) | 14. BNC (RGBHV/YPbPr) | 22. 12V Trigger |
| 7. USB Charging Port | 15. Component | 23. Power |
| 8. VGA-In | 16. RCA Audio-In | |



Warranty

3-Year Optoma Express Service, 1-Year on Lamp

In the Box

EH503 projector, AC power cord, VGA to VGA cable, remote control, batteries for remote, CD-ROM user's manual, quick start card and warranty card, lens is not included

Optional Accessories

Three optional lenses, wireless dongle, ceiling mount, HDMI cable, Optoma screens, RF 3D glasses, RF 3D emitter, DLP® Link™ 3D glasses

Accessory Part Numbers

Lamp: BL-FP370A	Mount: BM-5001U
Remote: BR-3070L	Wireless VGA Dongle: BI-EXTBG03
RF 3D glasses: BG-ZF2100GLS	RF 3D emitter: BG-BC100B
DLP® Link™ 3D glasses: BG-ZD301	

UPC 796435 41 889 2

www.OptomaUSA.com

Optoma
Projector Expert

Copyright © 2013 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. The Optoma Express program is only valid in the U.S.