




Planar LUO-1.2

Outdoor LED Video Wall

Planar® Luminate™ Ultra Series LUO-1.2 is an outdoor high-brightness MicroLED video wall display with a fine 1.2mm pixel pitch for up-close viewing even in direct sunlight. It is IP65 rated for outdoor use and features front or rear service access, easily facilitating applications from transportation and retail signage to company picnics and poolside cinema. It is excellent for indoor spaces with high-ambient light as well.

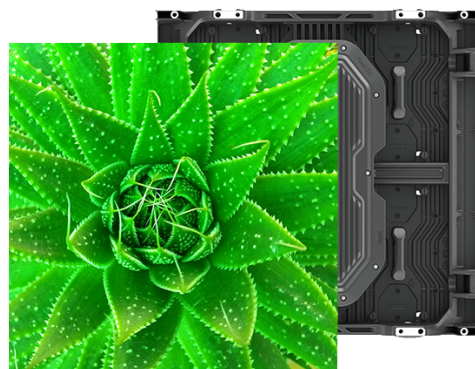

SPECIFICATION	DETAIL
Model	LUO-1.2
LED Package	Micro-LED
Cabinet Size (W x H x D)	19.69" x 19.69" x 3.51" (500 x 500 x 89.1 mm)
Cabinet Diagonal	27.83" (707.10mm)
Cabinet Resolution	392x392
Pixel Density (/m2)	614,656
Modules/Cabinet (WxH)	2x2
Module Resolution	196x196
Module Size (W x H)	250 x 250 mm
Power Consumption, Maximum (watts)	190
Line Voltage	100~240v AC, 50/60Hz
Cabinet Weight (per display)	19.84Lbs 9KG
Brightness Max, Calibration On (cd/sq)	3000
Color Temperature(K)	8000-9000 adjustable
Contrast Ratio	5000:1
Viewing Angle (50% of brightness)	>160° horizontal; >150° vertical
Front Access Install/Service	Yes
Refresh Rate	3840Hz
LED Lifetime (Half Brightness)	>75,000 hours

Operating Temperature/Humidity (degrees F/C, relative humidity)	-20° to 50° C -4° to 122° F (10-80% RH, non-condensing)
Storage Temperature/Humidity (degrees F/C, relative humidity)	-35° to 60° C -31° to 140° F (10-85% RH, non-condensing)
IP Rating	65 front and back

For more information, please visit www.planar.com

Specifications are subject to change without notice.

Specification Report Date: 5/11/2023


© Copyright 2023 Planar Systems, Inc. All rights reserved



Planar LU0-1.5

Outdoor LED Video Wall

Planar® Luminate™ Ultra Series LU0-1.5 is an outdoor high-brightness LED video wall display with a fine 1.5mm pixel pitch for up-close viewing even in direct sunlight. It is IP65 rated for outdoor use and features front or rear service access, easily facilitating applications from transportation and retail signage to company picnics and poolside cinema. It is excellent for indoor spaces with high ambient light as well.

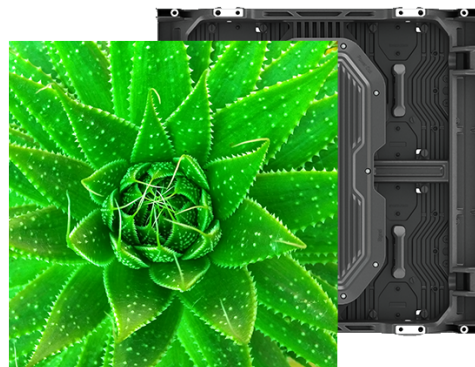

SPECIFICATION	DETAIL
Model	LU0-1.5
LED Package	SMD
Cabinet Size (W x H x D)	19.69" x 19.69" x 3.51" (500 x 500 x 89.1 mm)
Cabinet Diagonal	27.83" (707.10mm)
Cabinet Resolution	320x320
Pixel Density (/m2)	409,600
Modules/Cabinet (W x H)	2X2
Module Resolution	160x160
Module Size (W x H)	250 x 250 mm
Power Consumption, Maximum (watts)	160
Line Voltage	100~240v AC, 50/60Hz
Cabinet Weight (per display)	19.84Lbs 9KG
Brightness Max, Calibration On (cd/sq)	3500
Supported Frame rate	60Hz
Color Temperature(K)	8000-9000 adjustable
Contrast Ratio	5000:1
Viewing Angle (50% of brightness)	>160° horizontal; >150° vertical
Front Access Install/Service	Yes
Refresh Rate	3840Hz
LED Lifetime (Half Brightness)	>75,000 hours

Operating Temperature/Humidity (degrees F/C, relative humidity)	-20° to 50° C -4° to 122° F (10-80% RH, non-condensing)
Storage Temperature/Humidity (degrees F/C, relative humidity)	-35° to 60° C -31° to 140° F (10-85% RH, non-condensing)
IP Rating	65 front and back

For more information, please visit www.planar.com

Specifications are subject to change without notice.

Specification Report Date: 5/11/2023


© Copyright 2023 Planar Systems, Inc. All rights reserved



Planar LU0-1.9

Outdoor LED Video Wall

Planar® Luminate™ Ultra Series LU0-1.9 is an outdoor high-brightness LED video wall display with a fine 1.9mm pixel pitch for up-close viewing even in direct sunlight. It is IP65 rated for outdoor use and features front or rear service access, easily facilitating applications from transportation and retail signage to company picnics and poolside cinema. It is excellent for indoor spaces with high ambient light as well.

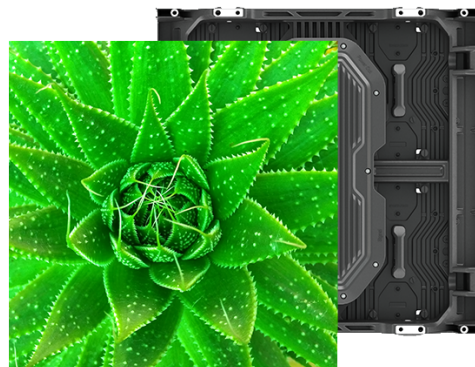

SPECIFICATION	DETAIL
Model	LUO-1.9
LED Package	SMD
Cabinet Size (W x H x D)	19.69" x 19.69" x 3.51" (500 x 500 x 89.1 mm)
Cabinet Diagonal	27.83" (707.10mm)
Cabinet Resolution	256x256
Pixel Density (/m2)	262,144
Modules/Cabinet (WxH)	2X2
Module Size (W x H)	250 x 250 mm
Power Consumption, Maximum (watts)	140
Line Voltage	100~240v AC, 50/60Hz
Cabinet Weight (per display)	19.84Lbs 9KG
Brightness Max, Calibration On (cd/sq)	3500
Supported Frame rate	60Hz
Color Temperature(K)	8500
Contrast Ratio	5000:1
Viewing Angle (50% of brightness)	>160° horizontal; >150° vertical
Front Access Install/Service	Yes
Refresh Rate	3840Hz
LED Lifetime (Half Brightness)	>75,000 hours

Operating Temperature/Humidity (degrees F/C, relative humidity)	-20° to 50° C -4° to 122° F (10-80% RH, non-condensing)
Operating Temperature/Humidity (degrees F/C, relative humidity)	-35° to 60° C -31° to 140° F (10-85% RH, non-condensing)
IP Rating	65 front and back

For more information, please visit www.planar.com

Specifications are subject to change without notice.

Specification Report Date: 5/11/2023

© Copyright 2023 Planar Systems, Inc. All rights reserved