

# SHARP

Be Original.

**PN-L705H**  
AQUOS BOARD®  
Interactive Display System



**Bringing Revolutionary New  
Dimensions to Your Communication**



**AQUOS BOARD®**

 **GOOD  
DESIGN**

**4K**  
3,840 × 2,160 pixels

# 4K Ultra-HD Resolution for Stunning Detail

Featuring 4K resolution, the 70" Class (69.5" diagonal) PN-L705H interactive display enhances the Sharp AQUOS BOARD lineup. Stunning 4K Ultra-HD resolution reproduces your content accurately with incredibly precise rendering of color and detail. It offers the SHARP Pen-on-Paper™ user experience promised by the Sharp AQUOS BOARD interactive display system series, providing revolutionary writing comfort close to actually using a pen to write on real paper. The PN-L705H interactive display can play an especially valuable role in the architecture, design and video industries, as well as in museums and libraries, all of which require precise detail and superior interactivity.


## Leading Technologies to Change Your Perspective

### 4K Ultra-HD Quality

The PN-L705H interactive display employs an LCD panel with 4K Ultra-HD (3,840 x 2,160-pixel) resolution. This 70" Class (69.5" diagonal) LCD monitor, with four times the resolution of full-HD, renders the textures of videos and images and reproduces the finest details of small text and intricate graphics. Besides the obvious benefits for office and educational settings, the PN-L705H interactive display practically engulfs the viewer in highly realistic sensations and detailed accuracy. It satisfies the needs of professionals in industries such as architecture and engineering, as well as in academic settings and creative sectors.

### Capacitive Touch Technology

Sharp's original capacitive touch technology gives the PN-L705H interactive display highly sensitive touchscreen operation. It allows ultra-precise multiple touch inputs to be detected X and Y conductive grids etched onto layers of the display. This achieves high sensitivity and precision by reducing the noise level to one-eighth of conventional models. Say goodbye to unintended input errors. You can operate and write on the screen as intended with touch pens or fingers, and gain maximum benefit from its superb performance.

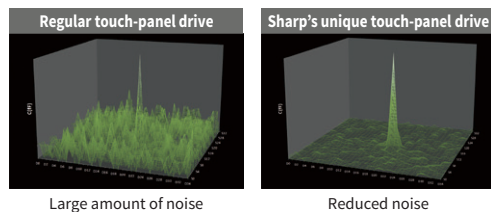

### Direct Bonding Technology

Thanks to direct bonding technology, the PN-L705H interactive display provides a consistent and natural feeling when you write on the screen. The LCD panel is bonded directly to the protective glass layer, thereby eliminating the air gap between them. This minimizes the parallax difference and reduces the reflection and refraction of light. As a result, onscreen touch and writing operations are smooth and the display looks natural and offers clear visibility.



### Simultaneous Writing

Keep everyone actively involved in the meeting or lesson by letting them write on the screen at the same time. The PN-L705H interactive display recognizes 30 touch points, allowing up to four people to use a touch pen or finger simultaneously to add their creative input when the inspiration strikes. Brainstorming sessions, meetings and lessons become more lively and productive.

### Minimize Glare and Fingerprints

Protecting the surface of the PN-L705H interactive display is an anti-glare film that works to reduce glare and reflections and minimize fingerprint soiling.

## Expandability for Further Convenience

### Choice of Expansion Boards

An expansion slot compatible with the Intel® Mini Open Pluggable Specification (Mini OPS) is ready to support the addition of an optional board providing greater convenience and an expanded range of functionality. An optional board slides into the slot on the back of the monitor.



#### • Wireless Board (PN-ZB03W)

Up to 10 devices including Mac® or Windows® computers, smartphones, and tablets can be connected wirelessly to the PN-L705H interactive display. Input from four devices can be displayed in a 2 x 2 split-screen.

#### • HDBaseT™ Receiver Board (PN-ZB03H)


This board enables reception of HDMI™ video/audio and control signals sent via a single LAN cable from up to 100 metres away. Compatibility with HDBaseT 2.0 allows you to remotely operate a PC from a USB device connected to this board.

#### • Computing Board (PN-ZB03AO)

This low energy consumption computing card gives you an on-board PC featuring the Intel Celeron N3160 processor and stunning 4K graphics engine. The computing board includes 4GB of memory, a 64GB solid state drive, and Windows 10 IoT Enterprise.

### MFP Connectivity

The PN-L705H interactive display is compatible with Sharp MFPs. Scanned documents can be directly imported to SHARP Pen Software from a compatible Sharp MFP. Onscreen image data, including handwriting, can be sent to a PC for storage or to an MFP for printing.

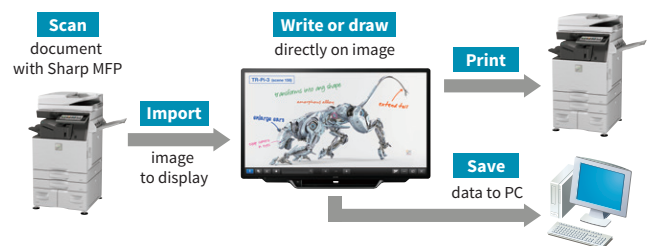

### Crestron Connected™

Compatibility with Crestron Connected software enables you to remotely control and manage each monitor via a LAN network.



## High-precision Touch Pen with Pointer

This pressure-sensitive pointer pen fits comfortably in your hand and provides outstanding ease of use. With a 2 mm-pen tip, it enables you to draw thin lines or write fine text with high precision. In conjunction with the direct bonding and capacitive touch technologies employed by the PN-L705H interactive display, it enhances the value of the Sharp Pen-on-Paper user experience. This multifunctional touch pen has buttons to control frequently used functions including page up/down, right mouse click, and the SHARP Pen Software link. It also has an LED indicator synchronized with the selected pen color. Plus, it has a pointer function, enabling you to indicate specific items on the PN-L705H interactive display from a distance. Up to four people can use the pointer pens simultaneously and customize their own pointer icon including the shape, size and color which enhances effective and efficient interaction and collaboration.



## Palm Cancellation Function

This function prioritizes pen recognition. It allows you to write with your palm resting on the screen, making it easy to write fine text or draw detailed graphics with excellent stability.

## Touch OSD Menu

The Touch OSD Menu is designed for easy and intuitive access to frequently used functions and settings such as brightness, contrast, language selection, backlight on/off, freeze/unfreeze screen and more.

## Multi-Board Function

Up to three PN-L705H interactive displays can be linked side by side to display sequential pages. The Multi-Board Function\* is the ultimate tool for communicating complex information, for example, roadmaps and spreadsheets.

\* Only permits one unit to be touch-operated at the same time. For simultaneous touch operation of all the linked units, please consult with your local authorized Sharp dealer or representative. In a Multi-Board configuration, Sharp recommends limiting the display resolution to full-HD for the purpose of stable operation.

## Versatile Installation

The PN-L705H interactive display can be installed in various orientations—landscape, portrait, or horizontal (face-up)—and at various angles\* to match a diverse range of installation spaces or purposes. For example, face-up installation facilitates group discussions in an office or classroom where participants are looking down at the screen and writing simultaneously. Such versatility can change the way you communicate and encourages fresh ideas and innovation.



\* Supports 20/45/90 degrees (backward). For other angles please consult with your local authorized Sharp dealer or representative.

## Quad-Screen Display

You can display four screens in full-HD resolution simultaneously by simply connecting four PCs to the PN-L705H interactive display via video cables. The display is switchable between single-screen and quad-screen. This function greatly facilitates productive interactions in the office or classroom.

## SHARP Touch Viewer™ Software

This software is a touch-operated onscreen user interface that lets you easily manipulate different types of files, including Microsoft® Office applications, videos, and web pages. The files are displayed onscreen as “sheets,” which can be stored in onscreen virtual “drawers.” This software brings convenience and originality to business meetings, in-store installations, and more.



Note: Available via the downloader on the bundled CD-ROM.

## SHARP Display Connect™

This software supports multifaceted wireless communication. Content on the PN-L705H interactive display screen, including handwritten notes, can be shared simultaneously with up to 50 devices. Also, files can be exchanged between devices connected to the PN-L705H interactive display.

Note: Available via the downloader on the bundled CD-ROM.

## 4K Interactive Signage

The PN-L705H interactive display can play a powerful role in 4K interactive digital signage. The 4K Ultra-HD monitor makes content all the more appealing by delivering subtle texture and depth, and rendering fine text and graphics clearly. Plus, Sharp's highly sensitive capacitive touch and direct bonding technologies boost an outstanding interactive signage experience providing precise touch responses and clear and natural visibility. The PN-L705H interactive display will find practical use not only in office situations, but also for many other applications, including sophisticated advertising in retail stores, malls and showrooms, as well as signage in public areas and digital archives of museums and libraries. Sharp provides high-definition and high-precision solutions to satisfy the requirements of demanding interactive signage users.




# Specifications

<b>Model Name</b>		PN-L705H
<b>Installation</b>		Landscape / Portrait / Face-up
<b>LCD Panel</b>	70" Class (69.5" diagonal) UV <sup>1</sup> A <sup>1</sup> LCD	
	Max. Resolution	3,840 x 2,160 pixels
	Max. Display Colors (approx.)	1.06 billion colors
	Pixel Pitch (H x V)	0.401 x 0.401 mm
	Max. Brightness (average) <sup>2*</sup>	300 cd/m <sup>2</sup>
	Contrast Ratio	4,000 : 1
	Viewing Angle (H/V)	176°/176° (CR ≥ 10)
	Active Screen Area (W x H) (approx.)	1,538.9 x 865.6 mm (60 3/16" x 34 1/16")
	Response Time	6 ms (gray to gray, avg.)
	Backlight	LED, edge lit
<b>Touchscreen</b>	Touch Technology	Capacitive touch
	PC Connection Port	USB (2.0 compliant) (Type B) x 2
	Power Supply	Supplied from main unit
	Multi Touch	30 points
	Protection Glass	Thickness: Approx. 1.9 mm <sup>3</sup> Shock resistance: 130 cm <sup>4</sup>
<b>Touch Pen</b>	Communication	Wireless communication method
	Function Button	Yes
<b>Computer Input</b>	Video	Analog RGB (0.7 Vp-p) [75Ω], HDMI, DisplayPort™ 1.2a
	Synchronization	Horizontal/vertical separation (TTL: positive/negative), Sync on green <sup>5</sup> , Composite sync (TTL: positive/negative) <sup>6</sup>
	Plug & Play	VESA DDC2B
	Power Management	VESA DPMS
<b>Input Terminals</b>		PC analog: Mini D-sub 15-pin x 1 <sup>6</sup> , HDMI (HDCP compatible), PC/AV signal compatible) x 3, 3.5 mm-diameter mini stereo jack x 1, Component video x 1 <sup>7</sup> , DisplayPort (HDCP compatible) x 2, RS-232 x 1
<b>Output Terminals</b>		3.5 mm-diameter mini stereo jack x 1, DisplayPort (HDCP compatible) x 1
<b>Input/Output Terminals</b>		LAN port (10Base-T/100Base-TX) x 1
<b>Expansion Slot</b>		13 V, 2.4 A (power supplied when expanding the functions with an optional part)
<b>Speaker Output</b>		10 W + 10 W
<b>Mounting</b>		VESA (4 points), 400 x 400 mm pitch, M6 screw
<b>Power Supply</b>		100V - 240 V AC, 50/60 Hz
<b>Power Consumption</b>		215 W
<b>Environmental Conditions</b>	Operating Temperature <sup>8,9</sup>	5 °C to 35 °C
	Operating Humidity <sup>9</sup>	20% to 80% RH (no condensation)
<b>Dimensions (W x D x H) (approx.) (display only)</b>		63 1/2" x 3 5/8" x 37 1/16"
<b>Weight (approx.)</b>		126 lbs
<b>Main Accessories</b>		AC power cord, remote control unit, remote control unit battery (AAA size) x 2, set-up manual, cable clamp (insertion type) x 4, cable clamp x 3, USB cable, USB extension cable, RS-232C conversion cable, eraser, pen tray, touch pen, touch pen adapter, touch pen adapter screw, touch pen battery (AAA size), pen tip x 2, speaker cover x 2, camera mount, camera screw, speaker cover attachment screw/camera mount screw x 6, CD-ROM, SHARP Display Connect license, vertical sticker, blank sticker

<sup>1</sup> UV-A stands for Ultraviolet-induced Multi-domain Vertical Alignment, a photo-alignment technology that ensures uniform alignment of liquid crystal molecules. <sup>2</sup> Brightness depends on input mode and other picture settings. Brightness level will decrease slightly over the lifetime of the product. Due to the physical limitations of the equipment, it is not possible to maintain a precisely constant level of brightness. <sup>3</sup> Including AG film on the front. <sup>4</sup> Approximate distance at which the glass panel can withstand the impact of a 500-gram iron ball dropped on its centre. <sup>5</sup> D-sub input terminal only. <sup>6</sup> When connecting with an analog mini D-sub 15-pin jack, max. resolution is 1,920 x 1,200 pixels. <sup>7</sup> Analog PC, video, and component video are switchable (on bottom interface); use the menu to select. Video and component video connections require conversion cable via mini D-sub 15-pin jack. <sup>8</sup> When using the monitor laying flat on a surface (when the monitor is tilted more than 20 degrees upward from the perpendicular in relation to a level surface) the ambient temperature must be within the range of 5°C to 30°C. Temperature conditions may change when using the monitor together with the optional equipment. In such cases, check the temperature conditions specified by the optional equipment. <sup>9</sup> Check the requirements of the computer and other devices to be connected, and make sure that all requirements are satisfied.


## Dimensions

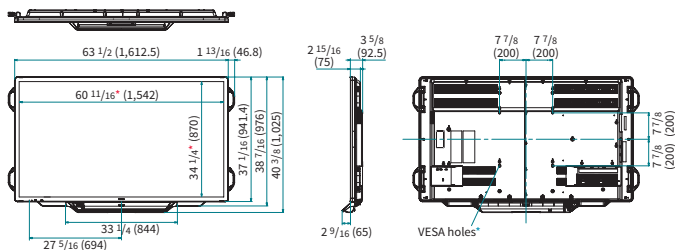

Units: inch (mm)  
<sup>\*</sup> Screen dimensions <sup>\*</sup> To use the VESA-standard mounting bracket, use M6 screws that are 8 to 10 mm plus the thickness of the bracket.

<b>&lt;System Requirements&gt;</b>	
<b>Connected Equipment</b>	
Hardware	PC/AT compatible machine with USB 2.0 port (CD-ROM drive required for installation)
OS	Windows® 7 (32-bit/64-bit), Windows® 8.1 (32-bit/64-bit), Windows® 10 (32-bit/64-bit) Mac OS X v10.11, macOS v10.12, Google Chrome™ OS v39 or later
<b>Supplied Software (Windows®)</b>	
CPU	Intel® Core™ i5-6360U or higher Intel® Core™ i7-6650U or higher recommended
Memory	4 GB or more
Hard disk	5 GB or more free space (additional space required for saving data)
To use the touch panel, connect the bundled USB cable to the computer. The touch panel operates with the standard driver of each OS. On the Mac, operation is only possible in single-touch mode.	

## Input/Output Terminals

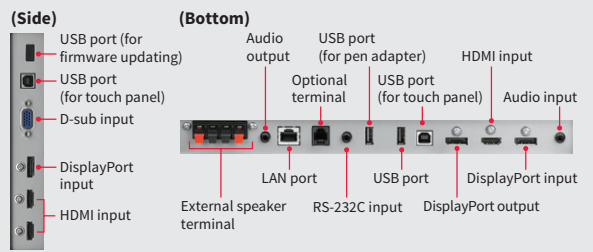

## Option

- PN-ZL06: Touch Pen
- PN-ZB03H: HDBaseT Receiver Board
- PN-ZB03W: Wireless Board
- PN-LZB03AO: Computing Board



SHARP ELECTRONICS CORPORATION  
 100 Paragon Drive, Montvale, NJ 07645  
 1-800-BE-SHARP • www.sharppusa.com

Design and specifications are subject to change without notice. Sharp, AQUOS BOARD, SHARP Pen-on-Paper, SHARP Display Connect and SHARP Touch Viewer are trademarks or registered trademarks of Sharp Corporation. Intel and Intel Core are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries. MirrorOp is a registered trademark of Awind Inc. Mac, OS X, and macOS are trademarks of Apple Inc., registered in the U.S. and other countries. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. HDBaseT and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. The terms HDMI and HDMI High-Definition Multimedia Interface and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. Crestron Connected is a trademark of Crestron Electronics, Inc. DisplayPort and the DisplayPort Compliance Logo are trademarks owned by the Video Electronics Standards Association in the United States and other countries. Google Chrome is a trademark or registered trademark of Google Inc. All other brand names and product names may be trademarks or registered trademarks of their respective owners. All screen images appearing in this brochure are simulated.