

TECHNICAL SPECIFICATIONS

VIDEO	
Format	DVI Dual Link; DVI Single-Link; VGA
Host Interface	(4) DVI-I 29-pin (female)
User Console Interface	(2) DVI-I 29-pin (female)
Max Resolution	DVI Dual-Link: 2560 x 1600; DVI Single-Link: 1920 x 1200; VGA: 1920 x 1080
DDC	5 volts p-p (TTL)
Input Equalization	Automatic
Input Cable Length	Up to 20 ft
Output Cable Length	Up to 20 ft
USB	
Signal Type	USB 2.0, 1.1, and 1.0 w/ internal hub
Input Interface	(2) USB Type B
Output Interface	(2) USB 1.1 Type A for KVM Devices (2) USB 2.0 Type A Transparent
AUDIO	
Audio Input	(2) 3.5mm stereo audio (female)
Audio Output	(1) 3.5mm stereo audio (female)
POWER	
Power Requirements	12V DC, 2A power adapter with center-pin positive polarity
ENVIRONMENT	
Operating Temp	32° to 104° F (0° to 40° C)
Storage Temp	-4° to 140° F (-20° to 60° C)
Humidity	0-80% RH, non-condensing
CONTROL	
Front Panel	Push Buttons with LED indicators
RS-232	Via Serial @ 115200 bps
Hot Keys	Via Keyboard
OTHER	
Emulation	Keyboard, Mouse and Video

WHAT'S IN THE BOX

PART NO.	QTY	DESCRIPTION
SM-DVN-2D	1	2-port, DH DVI-I KVM Switch
PS12VDC2A	1	12-VDC, 2-A power adapter with center-pin positive polarity.
	1	Quick Start Guide

NOTICE

The information contained in this document is subject to change without notice. iPGARD makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for a particular purpose. iPGARD will not be liable for errors contained herein, or for incidental or consequential damages in connection with the furnishing, performance, or use of this material. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent from iPGARD, Inc.

20170518



DESIGNED
AND MADE
IN THE USA

Toll Free: (888)-994-7427

Phone: (702) 800-0005

Fax: (702)-441-5590

WWW.IPGARD.COM

Smart-AM
SMART AUDIO VIDEO INNOVATION

SM-DVN-2D

Advanced KVM Switch



**DUAL-HEAD 2-PORT
DVI-I DUAL LINK KVM SWITCH
WITH USB 2.0 SHARING**

Quick Start Guide

A full manual can be downloaded from
www.ipgard.com/SM-DVN-2D/

SYSTEM CONTROL

There are three ways to control the KVM Switch: Keyboard HotKeys, RS-232 Serial Commands, and Front Panel Buttons. The settings for the serial connection are as follows: Baud rate: **115200**; Data Bits: **8**; Parity: **None**; Stop Bits: **1**; Flow Control: **None**.

The following commands can be used:

Command	Hotkey	RS-232
Switch KVM	[CT] [CT] [#]<CR>	//m[#]<CR>
Audio Only	[CT] [CT] a[#]<CR>	//a[#]<CR>
KM Only	[CT] [CT] c[#]<CR>	//c[#]<CR>
USB Only	[CT] [CT] u[#]<CR>	//u[#]<CR>
Learn EDID	[CT] [CT] e<CR>	//e<CR>
Trigger Hotplug	[CT] [CT] h<CR>	//h<CR>
Reset Software	[CT] [CT] r	//r<CR>
Get Port Status	N/A	//??<CR>

Chart Key

[CT] = Ctrl
<CR> = Carriage Return (Enter Key)
[HK] = Current Hot Key Trigger

CUSTOM HOTKEY TRIGGERS

Users are able to customize the keys that trigger Hotkeys. The following keys are allowed: CT (Left/Right), Alt, Shift (Left/Right), Caps Lock, Scroll Lock, F1-F12

Change HK Trigger

HK + HK + X + desired hotkey

View Current HK Trigger

Use the RS-232 command: //??<CR>


Default HotKey Trigger

CT (Left)

HARDWARE INSTALLATION

1. Ensure that power is turned off or disconnected from the unit and the computers.
2. Use DVI cables to connect the DVI output ports from each computer to the corresponding DVI-I IN ports of the unit.
3. Use a USB cable (Type-A to Type-B) to connect a USB port on each computer to the respective USB ports of the unit.
4. Optionally connect a stereo audio cable (3.5mm to 3.5mm) to connect the audio output of the computers to the AUDIO IN ports of the unit.
5. Connect monitors to the DVI-I OUT console ports of the unit using DVI cables.
6. Connect a USB keyboard and mouse in the two USB console ports.
7. Optionally connect stereo speakers to the AUDIO OUT port of the unit.
8. Finally, power on the KVM by connecting a 12VDC power supply to the power connector, and then turn on all the computers.

Note: You can connect up to 2 computers to the 2 port KVM.

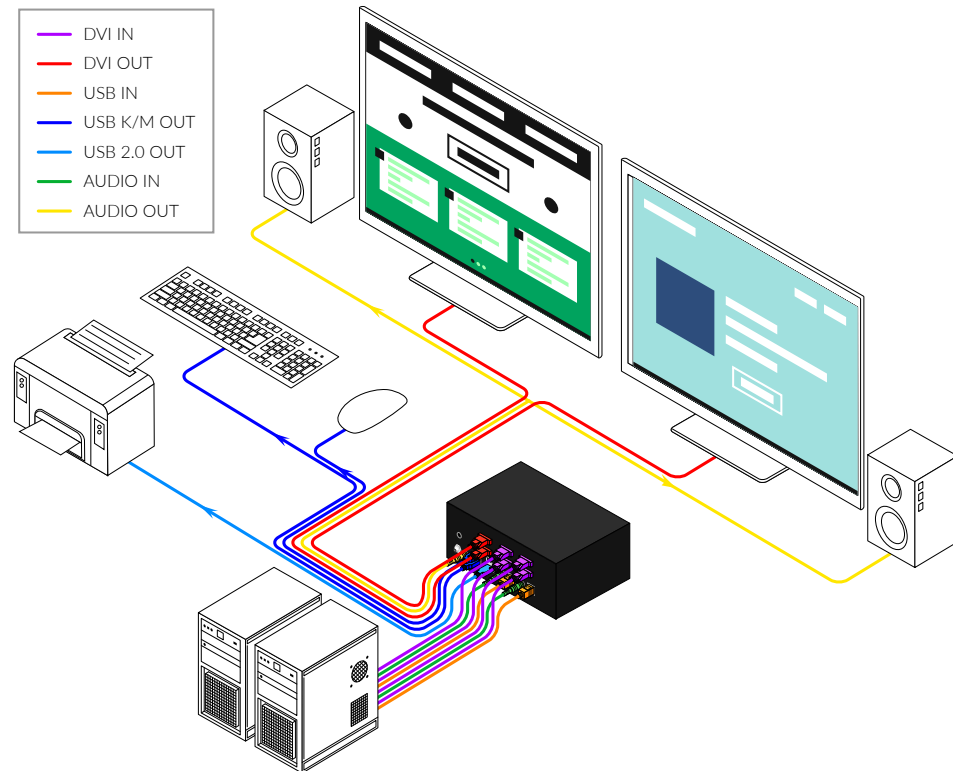

VGA SUPPORT

To use the SM-DVN with a VGA device, the monitor must also support analog signals. Once this is affirmed, you can connect the VGA monitor and PC to the SM-DVN using passive VGA to DVI adapters.