

HDS-8P

8-PORT HDMI SPLITTER



8-Port HDMI Splitter

Distribute one HDMI source signal
to eight displays in Full HD 1080p.

FEATURES

- HDMI 1.4a compliant
- HDCP 1.2 compliant
- Wide Frequency Range: 25MHz~225MHz
- Resolution up to 1080p or WUXGA
- Supports CEC (not bypassing)
- Supports Dolby Digital, DTS-HD and Dolby True HD audio
- Easy installation

APPLICATIONS

- Home Theater
- PC Networking
- Conference Center Systems
- Point of Sale
- Camera Surveillance
- Video Phone
- Control Room Systems
- Recording Studio




Made in the USA

Smart-AVI
SMART AUDIO VIDEO INNOVATION

www.smartavi.com

SPECIFICATIONS

APPLICATION DIAGRAM

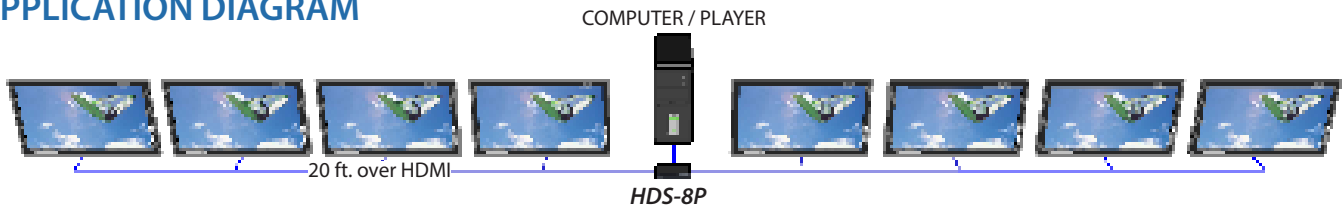

HDS-8P Front



HDS-8P Rear

VIDEO	
Format	HDMI 1.4a [Deep Color, xvYcc color space supported]
DVI Compliance	Single-link DVI-D 1.1
HDCP Compliance	1.0/1.1
Max Bandwidth	2.97 Gbps
Resolution	480i,480p,720i,720p,1080i,1080p
Input Interface	(1) HDMI[7.1ch audio & video]
Output Interface	(8) HDMI[7.1ch audio & video]
Connector	Type A[19-pin female]
Maximum Distance	20 ft.
AUDIO	
Supported Formats	DTS-HD Master Audio, Dolby TrueHD Dolby Digital, DTS, DVD-Audio, LPCM, SACD, MPCM
OTHER	
DDC Signal	5 Volts [peak-to-peak], TTL
TDMS Signal	1.5 Volts[peak-to-peak], TTL
Power	External 5VDC4A
Dimensions	11"W x 1.0"H x 5.5"D
Weight	1.55 lbs.
Approvals	Device: CE, ROHS Power Supply: C-UL US, CE

ORDERING INFORMATION	
Part No.	Description
HDS-8PS	HDMI 8-Port Splitter. Includes: [HDS8P and PSSVDC4A]

Many leading companies have recognized and embraced the innovation of SmartAVI's technologies and have successfully incorporated them into their organizations. Clients of SmartAVI include:



SmartAVI, Inc. / Twitter: smartavi - 11651 Vanowen St. North Hollywood, CA 91605
Tel: (818) 503-6200 Fax: (818) 503-6208 - <http://www.SmartAVI.com>