## TECH SPEC

### Vaddio<sup>™</sup> Accessories for AV Bridge<sup>™</sup> MATRIX PRO



# Triggers, Audio and Video Accessories for the AV Bridge MATRIX PRO

The AV Bridge MATRIX PRO combines the functionality of the AV Bridge encoder with IP and USB 2.0 (UVC & UAC) streaming, a four input seamless HD video presentation switcher, three (3) Quick-Connect<sup>™</sup> Interfaces for Vaddio cameras with EZCamera<sup>™</sup> Cat-5/5e/6 connectivity, an 8 x 4 crosspoint audio matrix with integrated AEC, four (4) EasyMic<sup>™</sup> Ports for Vaddio ceiling or table mics with built-in echo cancellation and a web server for configuration programming, control and remote management. The AV Bridge MATRIX PRO replaces a rack full of gear, and then some.

The MATRIX PRO was designed for integrators in order to reduce the complexity of AV system design and implementation, while delivering the features and capabilities most sought after by today's sophisticated end user.



It was also designed to seamlessly integrate with the Vaddio Cat-5 cameras using HSDS<sup>™</sup> (high speed differential signaling), as well as easily integrated audio and trigger devices for the AV Bridge MATRIX PRO to make possible quick and seamless integrations. There is also an option for a stand-alone Quick-Connect interface for use as a Program video display extension system, also using the Vaddio HSDS signaling platform. The below products are specifically packaged to take advantage of the MATRIX PRO's impressive functionality, and are identified in the following tables:

#### TRIGGERS FOR AV BRIDGE MATRIX PRO


Image	Product	Part Number	Key Specifications
	<ul> <li>StepVIEW Mat- Small</li> <li>Small pressure sensitive step mat provides contact closure output for Trigger devices</li> </ul>	999-1511-000 Worldwide	<ul> <li>44" (1.12m) x 27.5" (.7m)</li> <li>Rubber, non-slip exposed locator mat, small</li> <li>75' (22.8m) attached cord</li> </ul>
•	<ul> <li>StepVIEW Mat- Large</li> <li>Large pressure sensitive step mat provides contact closure output for Trigger devices</li> </ul>	999-1512-000 Worldwide	<ul> <li>57" (1.45m) x 27.5" (.7m)</li> <li>Rubber, Non slip exposed locator mat, large</li> <li>75' (22.8m) attached cord</li> </ul>
	<ul> <li>PresenterPOD System</li> <li>Manual Trigger System for MATRIX PRO, AutoPresenter and ProductionVIEW Consoles</li> </ul>	999-1111-000 North America 999-1111-001 International	<ul> <li>One (1) PresenterPOD Interface</li> <li>One (1) PresenterPOD with Trigger 4- buttons</li> <li>Interface Supports up to (2) PODs for 8-total triggers</li> <li>Adhesive labels and mounting hardware included</li> </ul>
	<ul> <li>Additional Presenter Pod</li> <li>One Presenter Pod to add to 999-1111-000 system for second Pod</li> </ul>	999-6920-000 Worldwide	<ul> <li>One (1) PresenterPOD with Trigger 4- buttons</li> <li>For use with Presenter POD Systems 999- 1111-000 and 999-1111-001</li> </ul>
	<ul> <li>AutoVIEW IR Sensor</li> <li>Single ceiling mounted IR sensor</li> <li>Movement sensor provides Trigger output for control devices</li> <li>Adjustable range</li> </ul>	999-1701-100	<ul> <li>Active IR Sensor and acrylic lens cover</li> <li>AudtVIEW IR Interface Controller</li> <li>Power supply</li> <li>(1) 3' (.9m) Cat-5 interface cable</li> </ul>

	ATIBLE VADDIO ACCESS		
Image	<ul> <li>Product</li> <li>EasyUSB Table MicPOD</li> <li>Desktop Mic Pod with (3) mic elements for 360-degree coverage and (3) built-in echo cancelers</li> <li>Can be directly connected to MATRIX PRO or EasyUSB Mixer/Amp EasyMic Ports</li> <li>EasyMic Port output only</li> </ul>	Part Number 999-8500-000 Worldwide	<ul> <li>Key Specifications</li> <li>(1) EasyMic MicPOD table mic with (3) elements and (3) Acoustic Echo Cancelers</li> <li>(1) 25' (7.6m) Cat-5 Cable</li> <li>Documentation</li> </ul>
	<ul> <li>EasyUSB Ceiling MicPOD-White</li> <li>White pendant Style 3 element Ceiling Mic with Plenum rated ceiling interface box</li> <li>For use with MATRIX PRO or EasyUSB Mixer/Amp</li> <li>EasyMic Port output only</li> </ul>	999-8510-000 Worldwide	<ul> <li>(1) EasyMic Ceiling Mic POD- 2.5" sphere with (3) elements, (3) Acoustic Echo Cancellers</li> <li>36" white adjustable hanging cable</li> <li>(1) Plenum rated Ceiling Interface Box</li> </ul>
	<ul> <li>EasyUSB Ceiling MicPOD-Black</li> <li>Black pendant Style 3 element Ceiling Mic with Plenum rated ceiling interface box</li> <li>For use with MATRIX PRO or EasyUSB Mixer/Amp</li> </ul>	999-8515-000 Worldwide	<ul> <li>(1) EasyMic Ceiling Mic POD- 2.5" sphere with 3 elements, 3 Acoustic Echo Cancellers</li> <li>36" black adjustable hanging cable</li> <li>(1) Plenum rated Ceiling Interface Box</li> <li>Documentation</li> </ul>
	<ul> <li>Trio Table Mic Array</li> <li>Desktop Mic Pod with (3) mic elements for 360-degree coverage and (3) built-in echo cancelers</li> <li>For use with MATRIX PRO or EasyUSB Mixer/Amp</li> </ul>	999-8850-000 Worldwide	<ul> <li>Features (3) Mic elements in a 360° Boundary array</li> <li>(3) built in Echo Cancelers (one per element) Built in DSP with automatic functions for easy set up</li> </ul>
vand filo 0 0 0 0 00 van soor - vand filo 0 0 0 0 0 00000	<ul> <li>EasyUSB PRO MIC I/O</li> <li>Allows Pro Mics to be used with MATRIX PRO or EasyUSB Mixer/Amp Easy Mic inputs</li> <li>Four Channel Pro Mic Mixer with individual built-in AEC references</li> <li>(4) XLR Mic Inputs</li> <li>EasyMic Port output only</li> </ul>	999-8520-000 North America	<ul> <li>(1) EasyUSB PRO MIC I/O</li> <li>(1) Power Supply</li> <li>Documentation</li> </ul>
	<ul> <li>Unidirectional Boundary Mic</li> <li>For use with Mic/Line inputs of MATRIX PRO</li> <li>Can be used in conjunction with EasyUSB Pro Mic I/O for scalable audio requirements</li> </ul>	701-0001-891 Worldwide	<ul> <li>(1) Boundary Microphone with integral on/off switch and red LED</li> <li>Assignable switch modes</li> <li>25' (7.6m) detachable cable</li> </ul>
	<ul> <li>Quick-Connect DVI/HDMI</li> <li>Quick-Connect DVI/HDMI for use as a display extension system with MATRIX PRO HSDS Program outputs up to 150' (45m)</li> <li>DVI/HDMI HD output on DVI connector, Component HD output on DE-15 connector</li> <li>Simultaneous DVI/HDMI and Component analog outputs up to 1080p resolution</li> </ul>	998-6906-000 North America 998-6906-001 International	<ul> <li>(1) DVI/HDMI Quick-Connect Interface</li> <li>(1) Power Supply</li> <li>Documentation</li> </ul>

### BASIC SYSTEM CONNECTIVITY

This diagram is intended to illustrate sample connectivity of Trigger devices such as StepVIEW Mats, Presenter PODs and AutoVIEW IR. Microphone sources shown as EasyUSB Table and Ceiling MicPODs, with further supplementation of Boundary microphones both directly connected to Mic/Line inputs or through an EasyUSB PRO Mic I/O to generate EasyMic Port signals. HSDS Program output fed via Cat-5 to a Quick-Connect DVI/HDMI

acting as a video source to a remote monitor or projector.

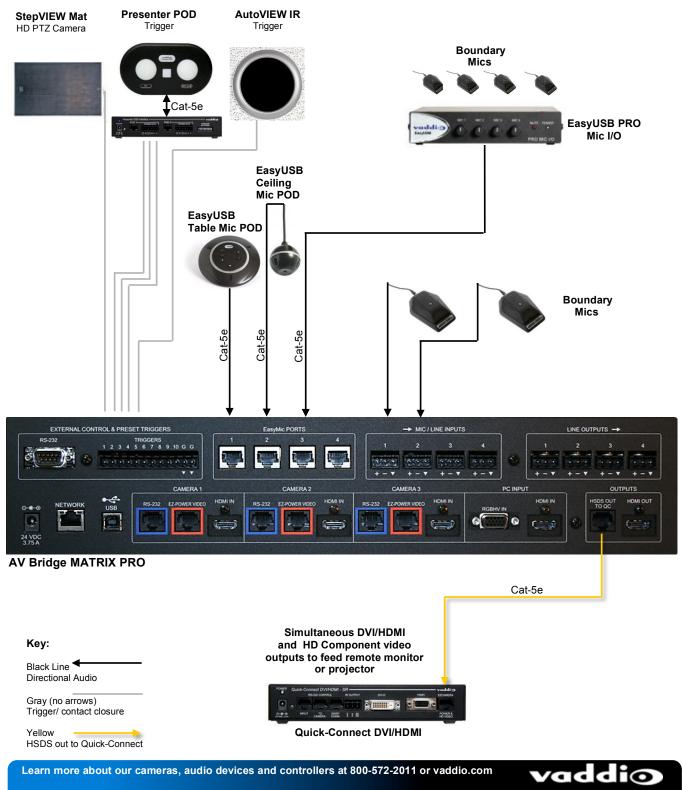

©2015 Vaddio - All Rights Reserved. Reproduction in whole or part without written permission is prohibited. Specifications and pricing are subject to change without prior notice or obligation. Vaddio, RoboSHOT, ZoomSHOT, ClearVIEW, PowerVIEW, HSDS, EZCamera, EasyMic, AV Bridge and Quick-Connect are trademarks of Vaddio. All other trademarks are the property of their respective owners. Preliminary Document 00031815-1, SD: 68675.3, Rev