

Integration friendly lecterns simplify design and minimize delays

FEATURES

- Frame to Furniture™ design complements an integrator's installation workflow
- Steel frame ships assembled and ready to integrate in the shop or on-site
- Open frame design includes built-in power and provisions for cable and thermal management
- Presenter's Panel™ is designed with the cutouts specified, and ships with the frame (models with Turret only)
- Available in 3 widths
- Unique design allows panels to be replaced quickly and easily
- Panels available in Sota and Klasik styles
- Standard finishes available in Veneer, High Pressure Laminate materials





OPTIONS

- Drawer/camera shelf shall be model # L5-DCD23 and be available for 33" and 43" wide models
- Side drawer shall be model #L5-SD7
- Side shelf shall be model #L5-FS- (refer to chart), and be available for 33" and 43" wide models
- Additional rail shall be model #L5-RRKIT23 (23" width model), L5-RRKIT3343 (33" and 43" width models)
- 8" Gooseneck light with dimmer shall be model #L5-TASKLIGHT18
- Articulating Tablet Mount shall be model #L5-TABLETMT
- Shockmount Microphone Holder shall be model #L5-SHOC-XLR-S
- 4" Clock Timer shall be model #L5-CLOCKTIMER4
- Single LCD monitor mount accommodates VESA 75 and VESA 100 monitor shall be Middle Atlantic Products part# MM-P-100-BK and have a 40 lb. weight capacity
- Custom 12" x 14" logo, Aluminum shall be model #L5-LOGO14A-XXXXX, Bronze shall be model #L5-LOGO14B-XXXXX, Color shall be L5-LOGO14CXXXXX
- Millwork Kit shall be model # L5-MK(select width, 23, 33, 43)-(select hardware color, SN=Satin Nickel, CB=Classic Bronze)


SPECIFICATIONS

EIA Compliant 19" AV Lectern shall be Middle Atlantic Products model # L5-__- LDW (refer to chart). AV Lectern shall be available in 23", 33", or 43" widths, with 1 or 2 rack bays and a storage area, depending on model (refer to chart). Overall dimensions shall be __" H x_W" x 28-3/8" D (refer to chart). Usable height shall be 12 rackspaces per bay. AV Lectern frames shall ship fully assembled and be constructed of steel. Total weight capacity with Middle Atlantic finishing kit shall be ____ lbs. (refer to chart) Each rack bay shall come equipped with 1 pair of 11-gauge steel rackrail tapped with 10-32 mounting holes in universal EIA spacing, black e-coat finish and numbered rackspaces. AV Lectern rack shall have (1,2) 70 CFM thermostatically controlled fans per bay. AV Lectern shall have a slide-out keyboard shelf. "W x 2.25" H x 12.06" D, AV Lectern shall have a side shelf with a useable area of 20.93" W x 7.49" H x 7.56" D. Thermostatically controlled fans shall be powered on at 87°F and turn off at 85°F. AV Lectern shall include a 15 Amp, 8 outlet surge-protected power strip with a 10' cord. Models with turret shall have customizable Presenter's Panel, which can accept touchscreens and other panel mounted devices with an overall size of "H x "W x 8.31" D (refer to chart). Models with turret shall include connectivity panel with two 15 Amp outlets, two type A USB USBs and AVIP device plates that support SVGA, HDMI, 3.5mm stereo, CAT 5/6 and USB. AV Lectern shall have venting on the top. AV Lectern shall be finished in a durable black powder coat. Finishing kit shall ship separately from rack, be available in a Sota or Klasik style and be model # L5-__K-__ (design online at LegrandAV.com), and secured to the Lectern. Top, sides and front doors shall be available in Veneer, High Pressure Laminate materials, visit LegrandAV. com for list of available finishes. AV Lectern rack shall include 4 fine floor casters. AV Lectern rack shall comply with the requirements of RoHS EU Directive 2011/96/EU. AV Lectern rack shall be manufactured by an ISO 9001 and ISO 14001 registered company. AV Lectern frame shall be warranted to be free from defects in material or workmanship under normal use and conditions for the lifetime of the rack, fans shall be warrantied for a period of three years.




EIA/TIA COMPLIANT




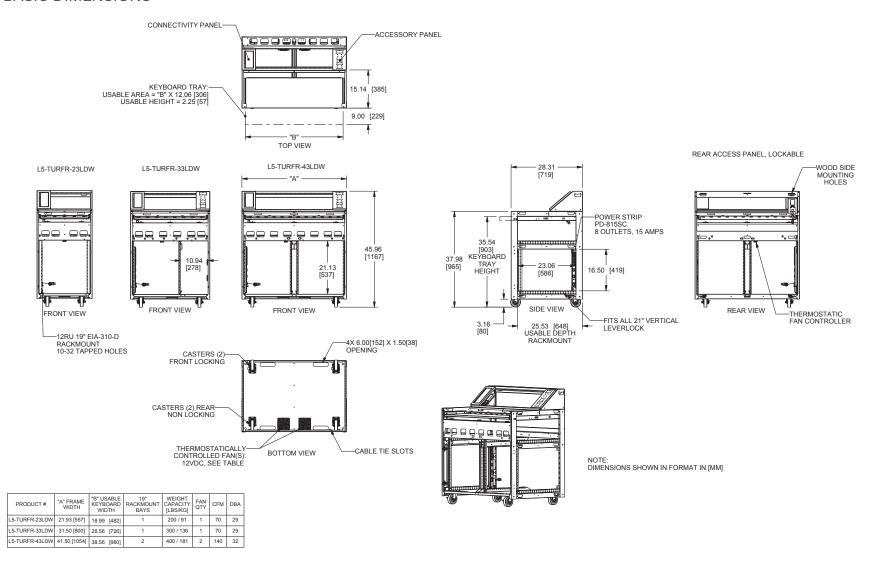




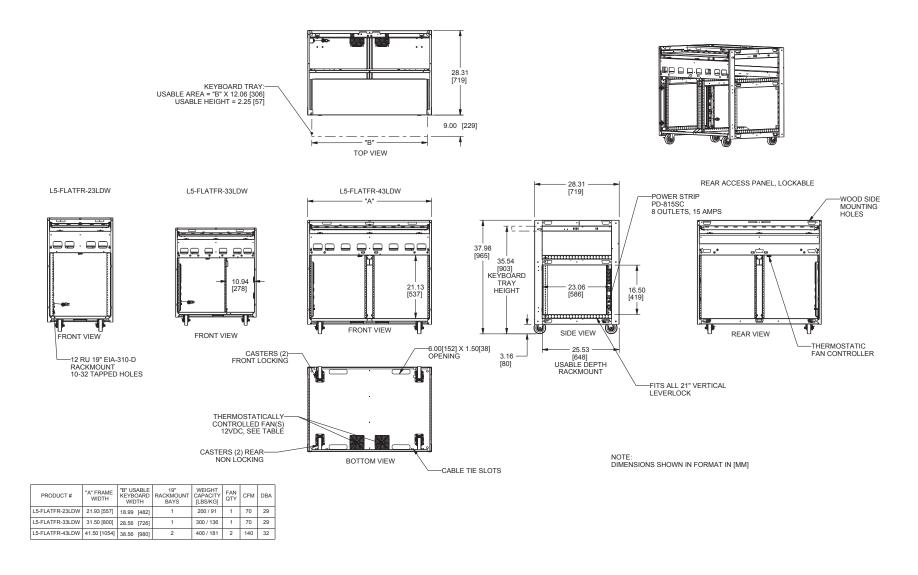



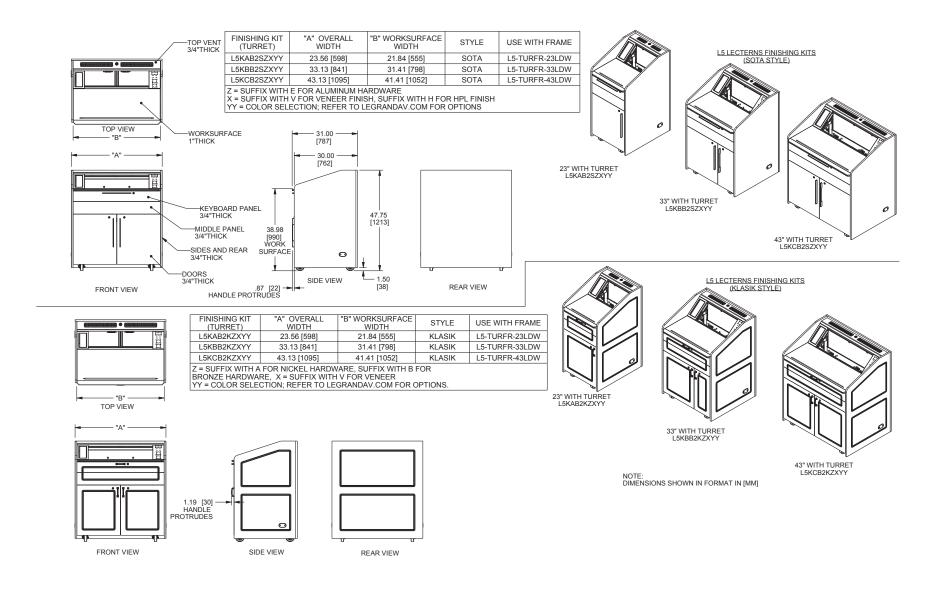




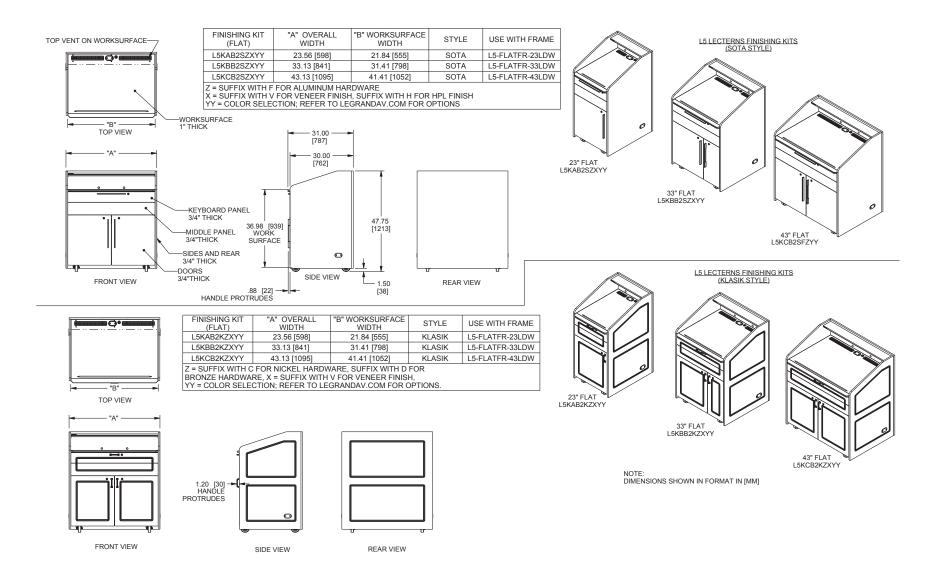




BASIC DIMENSIONS

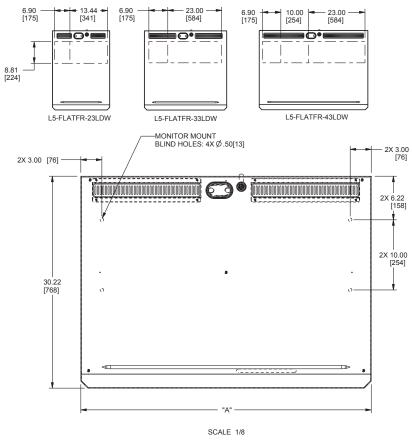

"A" WORK SURFACE WIDTH	GOES WITH FLAT FRAME
21.84 [555]	L5-FLATFR-23LDW
31.41 [798]	L5-FLATFR-33LDW
41.41 [1052]	L5-FLATFR-43LDW


	L5	SHELF OR DRAWER OPTION INSTALLED	SHELF OR DRAWER OPTION NOT INSTALLED	MIDDLE BETWEEN SHELF OR DRAWER OPTIONS
	23"	4.69 [119]	11.31 [287]	NA
Г	33"	4.69 [119]	11.31 [287]	NA
	43"	4.69 [119]	11.31 [287]	11.31 [287]
	USABLE DEPTH WITH DRAWER AND SHELF OPTION INSTALLED OR NOT INSTALLED.			D OR NOT INSTALLED.

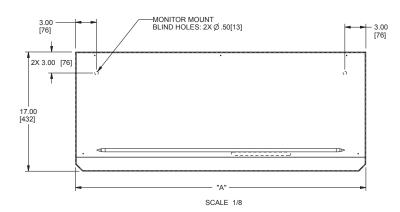

"A" WORK SURFACE WIDTH	GOES WITH TURRET FRAME
21.84 [555]	L5-TURFR-23LDW
31.41 [798]	L5-TURFR-33LDW
41.41 [1052]	L5-TURFR-43LDW


NOTE(S): 1) DIMENSIONS SHOWN IN FORMAT IN [MM] 2) BLIND HOLES INDICATE MOUNTING LOCATIONS FOR MONITOR MOUNT MM-P-100-BK



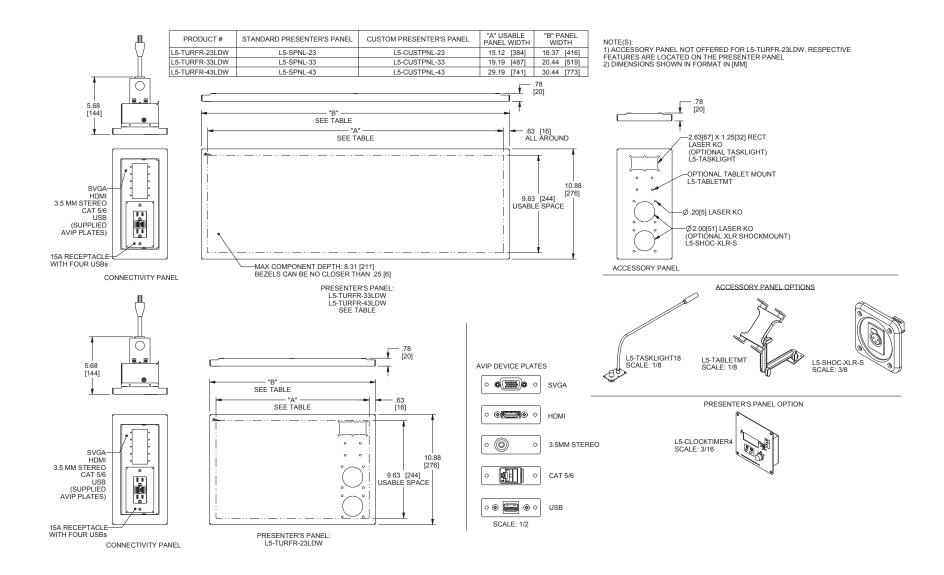



BASIC DIMENSIONS

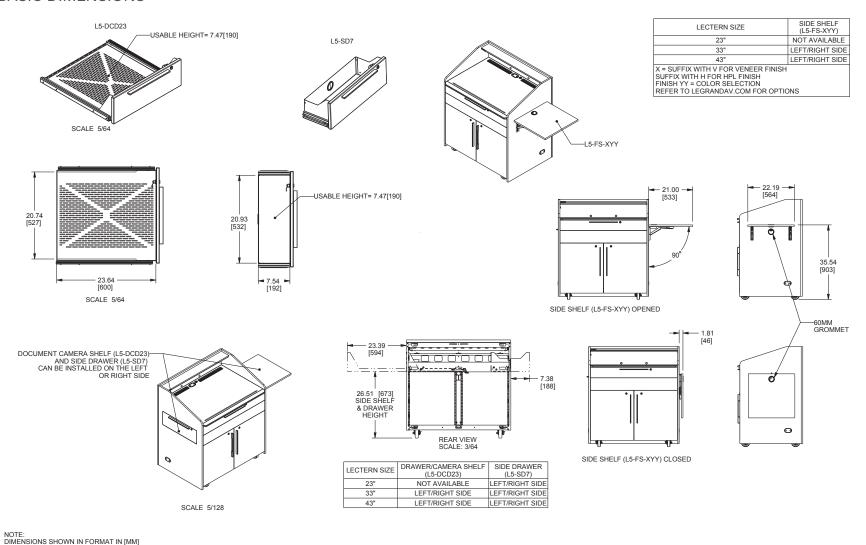

WHAT GREAT SYSTEMS ARE BUILT ON™ | legrandav.com

USA 800.266.7225 av.middleatlantic.support@legrand.com CANADA 888.766.9770 av.middleatlantic.support@legrand.com