Specification Sheet

SCREWLESS FLATPLATE


13A Socket Outlet

Single switched, double pole

FAB21B-01









MAIN FEATURES

- 13A Rated
- Easy to install supplied with fixing screws and installation instructions
- Angled colour coded in-line terminals provide easy access for quick installation
- Twin earth fitted as standard for high integrity circuits
- Captive screws prevent screw loss
- Screwless front plate clips on and off easily and has a sleek flat profile
- No visible plastic around switch
- Moisture control gasket prevents tarnishing from new plaster
- Minimum mounting box depth 35mm

GENERAL	Warranty (years)	25
DIMENSIONS	Product HxWxD (mm)	86x86x30
	Product Weight (kg)	0.142
	Front Plate Profile Depth (mm)	4.3
	Front Plate Material Thickness (mm)	0.8
CONSTRUCTION	Switched	Yes
	Number of Switches	1
	Switch Style Type	Rocker
	Switch Position	Right of Socket
	Front Plate Type	Screwless FP
	Front Plate Material	Steel
	Base Material	Polypropylene
ELECTRICAL	Operating Voltage (V)	220-240
	Frequency (Hz)	50-60
	Current Rating (A)	13
PROTECTION	Earth Terminal Fitted	Yes
	Number of Earth Terminals	2

**Specification is subject to change without notice. Errors and omissions excluded.*

Technical Support Helpline
03300 249 279 | technical.support@bgelectrical.co.uk
www.bgelectrical.uk

Luceco plc, Telford, TF3 3BD, UK.
Luceco SE, Barcelona, 08460, ES.

Specification Sheet

STYLE	General Colour	Antique Brass
	Front Plate Colour	Antique Brass - RAL1012 (Lemon Yellow)
	Socket Insert Colour	Black
	Light Reflective Value (%)	34.1
	Switch Colour	Antique Brass - RAL1012 (Lemon Yellow)
	Fixing Screws Colour	White Nickel Plated
	Base Colour	Grey
TECHNICAL	Socket Type	G-3P UK Ireland Hong Kong 220-240V 13A
	Operating Temperature (°C)	-5 to +40
	Switch Type (Ways & Poles)	Double Pole
INSTALLATION	Minimum Box Depth (mm)	35
	Fixing Centres (mm)	W-60.3
	Fixing Screws Supplied	Yes
	Terminal Capacity (# x mm²)	3x2.5 3x4 2x6.0
	Terminal Arrangement	Angled Inline
	Backed-out Terminal Screws	Yes
	Terminals with Colour Coding Print	Yes
	Captive Terminal Screws	Yes
COMPLIANCE	Standard(s)	UK BS 1363-2
	Directive(s)	UK LVD RoHS Plug&Socket - UK SI 1994 No. 1768 REACH GPSR
	WEEE Group	2. Small household appliances
BARCODE	Package EAN	5050765100618
	Inner EAN	5050765161138
	Outer EAN	5050765161473
PART PACKAGING	Package Pack Type	Eco Blister
	Packed HxWxD (mm)	153x120x32
	Package Hanging	Yes
	Packed Gross Weight (kg)	0.159
INNER PACKAGING	Inner Pack Type	Roll Printed Box
	Inner Quantity	5
	Inner HxWxD (mm)	127x117x207
	Inner Gross Weight (kg)	0.879
OUTER PACKAGING	Outer Pack Type	Roll Printed Box
	Outer Quantity	50
	Outer HxWxD (mm)	226x263x598
	Outer CBM (cu.m)	0.03444
	Outer Gross Weight (kg)	8.994

**Specification is subject to change without notice. Errors and omissions excluded.*

Technical Support Helpline
03300 249 279 | technical.support@bgelectrical.co.uk
www.bgelectrical.uk

Luceco plc, Telford, TF3 3BD, UK.
Luceco SE, Barcelona, 08460, ES.


Specification Sheet

SHIPPING	Commodity Code (EU)	8536508000
EDATA	ETIM Class	Socket outlet (EC000125)

Web URL:

Specification sheet created: 20261110

DG-FAB

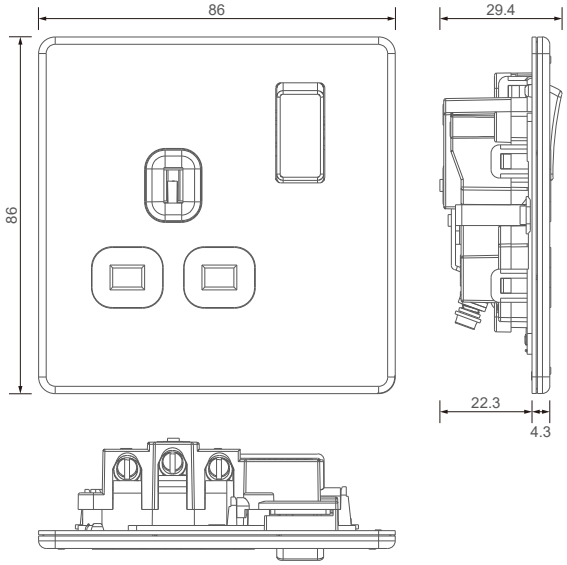

**Specification is subject to change without notice. Errors and omissions excluded.*

Technical Support Helpline
03300 249 279 | technical.support@bgelectrical.co.uk
www.bgelectrical.uk

Luceco plc, Telford, TF3 3BD, UK.
Luceco SE, Barcelona, 08460, ES.