Specification Sheet

SCREWLESS FLATPLATE

Dimmer Switch

Single, 2 way dimmer 200W, dual mode

FAB81-01









MAIN FEATURES

- 200W Rated (150W LED)
- Easy to install, supplied with fixing screws and installation instructions
- Adjust your light level for mood setting as well as energy saving with 2 way on/off
- Switchable Dimmer module for choice of trailing or leading edge (set to trailing edge as default)
- Soft start brings the lights to a set level in around 1 second and extends the life of lamps
- Overload protection prevents failure if you mistakenly connect your dimmer to too many lights or transformers and will turn the lights down or off until the load is corrected
- Silent operation - no noise when dimming
- Support for lower wattage lamps eliminates flicker
- Rotary dimmer control with push on/off function
- Screwless front plate clips on and off easily ideal for redecorating

GENERAL	Warranty (years)	25
DIMENSIONS	Product HxWxD (mm)	86x86x45
	Product Weight (kg)	0.156
	Front Plate Profile Depth (mm)	4.3
	Front Plate Material Thickness (mm)	0.8
CONSTRUCTION	Switched	Yes
	Number of Switches	1
	Switch Style Type	Push
	Front Plate Type	Screwless FP
	Front Plate Material	Steel
ELECTRICAL	Operating Voltage (V)	220-240
	Frequency (Hz)	50-60
	Min Wattage (W)	5
	Max Wattage (W)	200
PROTECTION	Earth Terminal Fitted	Yes
	Number of Earth Terminals	1
STYLE	General Colour	Antique Brass
	Front Plate Colour	Antique Brass - RAL1012 (Lemon Yellow)
	Light Reflective Value (%)	34.1
	Switch Colour	Antique Brass - RAL1012 (Lemon Yellow)
	Fixing Screws Colour	Antique Brass

**Specification is subject to change without notice. Errors and omissions excluded.*

Technical Support Helpline
03300 249 279 | technical.support@bgelectrical.co.uk
www.bgelectrical.uk

Luceco plc, Telford, TF3 3BD, UK.
Luceco SE, Barcelona, 08460, ES.

Specification Sheet

TECHNICAL	Switch Type (Ways & Poles)	Two Way
INSTALLATION	Minimum Box Depth (mm)	35
	Fixing Centres (mm)	W-60.3
	Fixing Screws Supplied	Yes
	Terminal Capacity (# x mm^2)	2x1.0 2x1.5
	Terminal Arrangement	Inline
	Backed-out Terminal Screws	Yes
	Captive Terminal Screws	Yes
COMPLIANCE	WEEE Group	2. Small household appliances
BARCODE	Package EAN	5050765240574
	Inner EAN	5050765240581
	Outer EAN	5050765240598
PART PACKAGING	Package Pack Type	Eco Blister
	Packed HxWxD (mm)	153x120x51
	Package Hanging	Yes
	Packed Gross Weight (kg)	0.177
INNER PACKAGING	Inner Pack Type	Roll Printed Box
	Inner Quantity	5
	Inner HxWxD (mm)	127x167x167
	Inner Gross Weight (kg)	0.997
OUTER PACKAGING	Outer Pack Type	Roll Printed Box
	Outer Quantity	50
	Outer HxWxD (mm)	219x343x648
	Outer CBM (cu.m)	0.04868
	Outer Gross Weight (kg)	10.261
SHIPPING	Commodity Code (EU)	8536508000
EDATA	ETIM Class	Dimmer (EC000025)


**Specification is subject to change without notice. Errors and omissions excluded.*

Technical Support Helpline
03300 249 279 | technical.support@bgelectrical.co.uk
www.bgelectrical.uk

Luceco plc, Telford, TF3 3BD, UK.
Luceco SE, Barcelona, 08460, ES.

Specification Sheet

Web URL: https://luceco.click/mkm
Specification sheet created: 20261110
DG-FAB

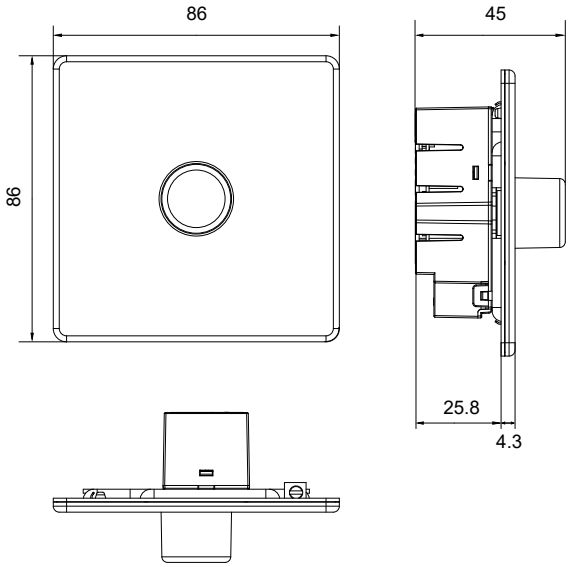

**Specification is subject to change without notice. Errors and omissions excluded.*

Technical Support Helpline
03300 249 279 | technical.support@bgelectrical.co.uk
www.bgelectrical.uk

Luceco plc, Telford, TF3 3BD, UK.
Luceco SE, Barcelona, 08460, ES.