



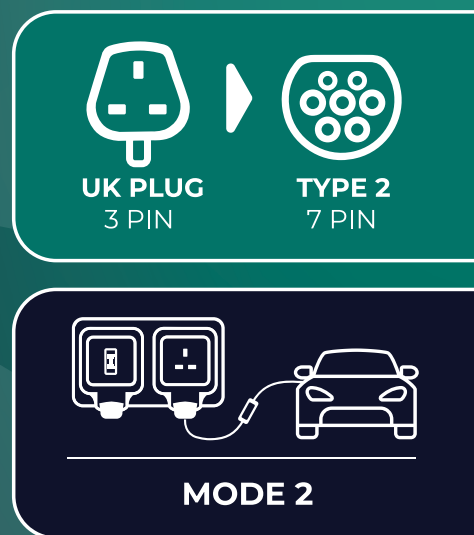

EV CHARGING ⚡

MASTERPLUG MODE 2 PORTABLE CHARGER

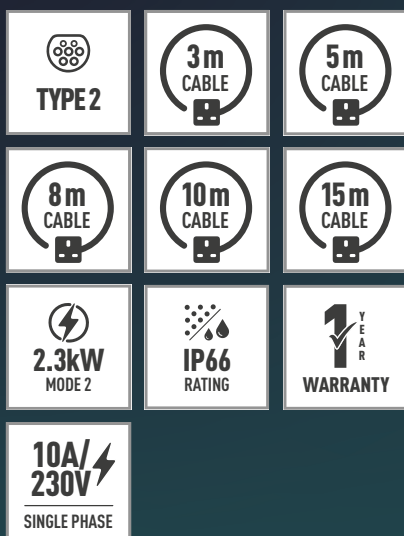


- **Type 2, Safe and Intelligent Electric Vehicle Charging Cable From Masterplug:**
Charges all Compatible Plug-In Electric Vehicles
- **Dust and Weatherproof Rated:**
The Control Box is IP66 Rated When Connected to a Vehicle, and IP55 When Not in Use and IP65 end-cap is applied
- **LCD Charging Status Display:**
Lets You Know the Status of the Charging, and Stops Charging When the Vehicle is Fully Charged, With Built in Safety Protection
- **Charging Power:**
At 10 A/2.4kW Which is an Average of 8 Miles Per Charging Hour
- **Robust Polycarbonate Construction:**
Lightweight yet strong, ensuring long-lasting performance
- **Time Delay:**
Press of the button delays the charging by 1 hour press multiple time to extend up to 12 hours delay
- **Power Change:**
UK maximum is 10 amps (EU 16A) set this level to reduce the charging current options are 6A, 8A, 10A to suit those with none EV rated sockets – displayed on screen
- **Language Selection:**
Choose from English, German, Spanish, French (UK Version)



RANGE FEATURES

CODES :	3M LENGTH EVCM221003
	5M LENGTH EVCM221005
	8M LENGTH EVCM221008
	10M LENGTH EVCM221010
	15M LENGTH EVCM221015
SOCKET / PLUG :	TYPE 2 CONNECTOR TO UK 13A MAINS PLUG
CHARGE CURRENT :	CONFIGURABLE 6-10A
INPUT VOLTAGE :	220-240V / 50-60HZ SINGLE PHASE
COLOUR :	BLACK - RAL9005
IP RATING :	IP66 CONTROL BOX, IP55 NOT IN USE AND IP65 NOT IN USE WITH END-CAP FITTED
MATERIAL :	UV RESISTANT POLYCARBONATE
OPERATING TEMP :	-25°C TO + 40°C, INTEGRATED THERMAL PROTECTION

SCREEN DISPLAY:

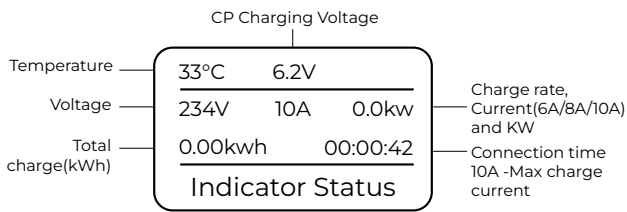


ELECTRICAL AND SAFETY

PEN PROTECTION :	YES, INTEGRATED EARTH DISCONNECTION
EARTH ROD :	NOT REQUIRED, SUPPORTS TT, TN C-S, PME
RCD PROTECTION :	YES, INTEGRATED 6MA DC AND 30MA AC TYPE A
ELECTRICAL CLASS :	CLASS 1, WITH CLASS 2 HOUSING FOR PEN FAULT PROTECTION
POWER SOCKET REQUIREMENTS	ONLY TO BE USED WITH SOCKETS MARKED FOR EV CHARGING AND APPROVED TO BS1361/EV
INDICATOR :	RBG LED BLUE - STANDBY SCROLLING GREEN - CHARGING SOLID GREEN - CHARGING FINISHED RED - ERROR
WARRANTY :	1 YEAR STANDARD WARRANTY
STANDARDS AND APPROVALS :	EN 62752, EN61851-1

BUTTON DISPLAY:



To change settings for Timer and Power:
Press and hold the required mode button
to engage and access the mode settings.
Once set press an alternative button to
save and exit.



To change settings for Lanuage: Press and
hold the Timer and Power mode buttons
simultaneously, to engage and access the
mode settings.

Use the Timer Symbol to make selection.
Then Use the Power Symbol to confirm,
save and exit.