

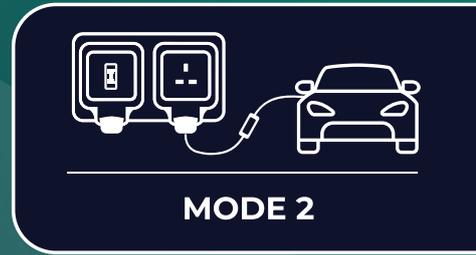


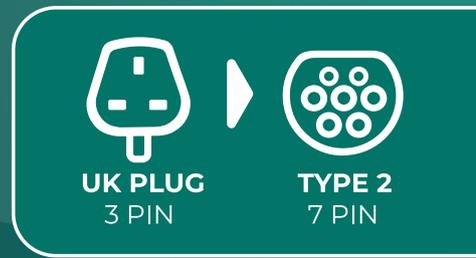

# EV CHARGING ⚡

## MASTERPLUG MODE 2 PORTABLE CHARGER

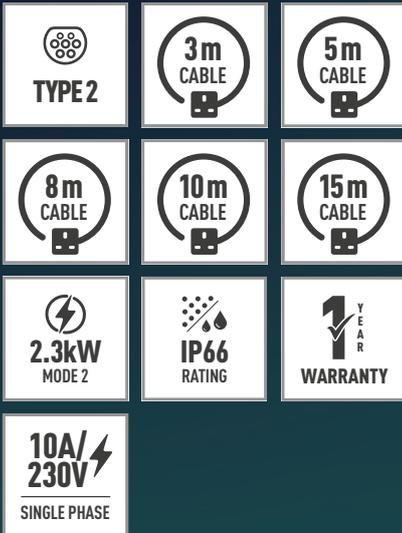


- **Type 2, Safe and Intelligent Electric Vehicle Charging Cable From Masterplug:**  
Charges all Compatible Plug-In Electric Vehicles
- **Dust and Weatherproof Rated:**  
The Control Box is IP66 Rated When Connected to a Vehicle, and IP55 When Not in Use and IP65 end-cap is applied
- **LCD Charging Status Display:**  
Lets You Know the Status of the Charging, and Stops Charging When the Vehicle is Fully Charged, With Built in Safety Protection
- **Charging Power:**  
At 10 A/2.4kW Which is an Average of 8 Miles Per Charging Hour
- **Robust Polycarbonate Construction:**  
Lightweight yet strong, ensuring long-lasting performance
- **Time Delay:**  
One Press of the button delays the charging by 1 hour, press multiple times to extend up to 5 hours delay
- **Power Change:**  
UK maximum is 10 amps (EU 16A) set this level to reduce the charging current options are 6A, 8A, 10A to suit those with none EV rated sockets – displayed on screen
- **Language Selection:**  
Choose from English, German, Spanish, French (UK Version)



## RANGE FEATURES

<b>CODES :</b>	<b>3M LENGTH</b> EVCM221003
	<b>5M LENGTH</b> EVCM221005
	<b>8M LENGTH</b> EVCM221008
	<b>10M LENGTH</b> EVCM221010
	<b>15M LENGTH</b> EVCM221015
<b>SOCKET / PLUG :</b>	TYPE 2 CONNECTOR TO UK 13A MAINS PLUG
<b>CHARGE CURRENT :</b>	CONFIGURABLE 6-10A
<b>INPUT VOLTAGE :</b>	220-240V / 50-60HZ SINGLE PHASE
<b>COLOUR :</b>	BLACK - RAL9005
<b>IP RATING :</b>	IP66 CONTROL BOX, IP55 NOT IN USE AND IP65 NOT IN USE WITH END-CAP FITTED
<b>MATERIAL :</b>	UV RESISTANT POLYCARBONATE
<b>OPERATING TEMP :</b>	-25°C TO + 40°C, INTEGRATED THERMAL PROTECTION

### SCREEN DISPLAY:

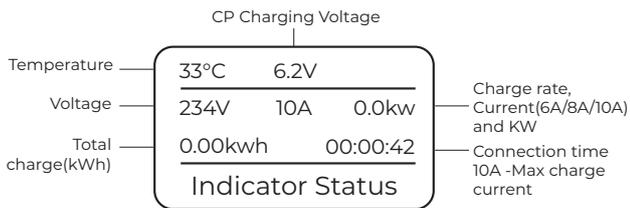


## ELECTRICAL AND SAFETY

<b>PEN PROTECTION :</b>	YES, INTEGRATED EARTH DISCONNECTION
<b>EARTH ROD :</b>	NOT REQUIRED, SUPPORTS TT, TN C-S, PME
<b>RCD PROTECTION :</b>	YES, INTEGRATED 6MA DC AND 30MA AC TYPE A
<b>ELECTRICAL CLASS :</b>	CLASS 1, WITH CLASS 2 HOUSING FOR PEN FAULT PROTECTION
<b>POWER SOCKET REQUIREMENTS</b>	ONLY TO BE USED WITH SOCKETS MARKED FOR EV CHARGING AND APPROVED TO BS1361/EV
<b>INDICATOR :</b>	RBG LED BLUE - STANDBY SCROLLING GREEN - CHARGING SOLID GREEN - CHARGING FINISHED RED - ERROR
<b>WARRANTY :</b>	1 YEAR STANDARD WARRANTY
<b>STANDARDS AND APPROVALS :</b>	EN 62752, EN61851-1
<b>BUTTON DISPLAY:</b>	



To change settings for Timer and Power: Press and hold the required mode button to engage and access the mode settings. Once set press an alternative button to save and exit.



To change settings for Lanuage: Press and hold the Timer and Power mode buttons simultaneously, to engage and access the mode settings.

Use the Timer Symbol to make selection. Then Use the Power Symbol to confirm, save and exit.