



Technical Specification

10m Cassette Reel with USB A + C

GMU10132UAC20SL




Features

- » Portable cassette reel with USB A + C (max 20W PD)
- » Safety thermal cut-out
- » Power on/off switch
- » Power LED indicator
- » Easy wind handle and rear grip
- » Optimised design for increased cable capacity

Description

A lightweight and portable solution for use in heavy duty applications, with USB A + C ports (max 20W PD). The compact nature allows for easy transportation and storage. This cassette reel includes four shuttered sockets, LED indicator, integrated power switch and a safety thermal cut-out for protection against overloading when fully reeled.

Line Diagrams

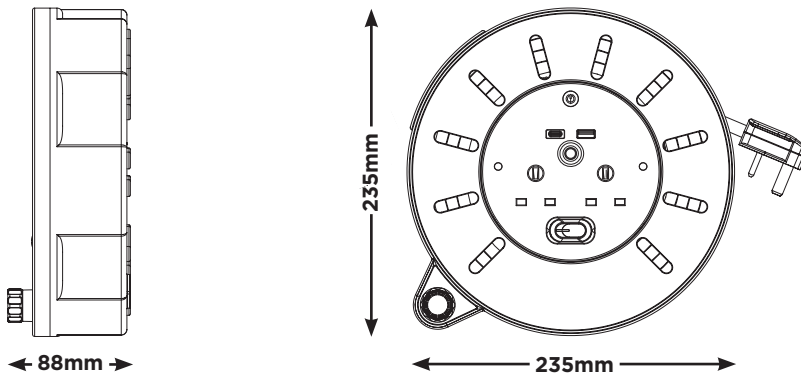

Product Information

Part No	GMU10132UAC20SL	Qty	5
Type	Cassette Reel	Shipping Carton Info (m)	H:0.39 x W:0.26 x D:0.26
Cable Type	PVC	CBM (m³)	0.026
Cable Length (m)	10m	G.W (kg)	8.2
Amp	13	EAN Barcode	5015056764917
Product Dimensions (cm)	H:23.5 x W:23.5 x D:9	ITF Barcode	05015056765013

Technical Specifications

Standards	BS EN 61242. ASTA Approved
Maximum Load	720W/240V - Fully Wound 3120W/240V - Fully Unwound
Switch	Double Pole
Cable Size	1.25mm ² (H05VV-F)



Lic 940



Technical Data (Tested at 230V~ 50Hz)

	USB Output	Average Active Efficiency	Efficiency at 10% Load	No Load Power Consumption
USB A	5.0V⇒3A 15.0W	>81.39%	>72.48%	≤0.1 W
	9.0V⇒2A 18.0W	>85.00%	>75.45%	≤0.1 W
	12V⇒1.5A 18.0W	>85.00%	>75.45%	≤0.1 W
USB C	5.0V⇒3A 15.0W	>81.39%	>72.48%	≤0.1 W
	9.0V⇒2.22A 20.0W	>85.47%	>75.96%	≤0.1 W
	12V⇒1.67A 20.0W	>85.47%	>75.98%	≤0.1 W
USB C PPS	3.3V⇒1.8A 5.9W	>74.93%	>65.91%	≤0.1 W
	11.0V⇒1.8A 19.8W	>85.43%	>75.92%	≤0.1 W
USB A + C	5.0V⇒ 3A 15W	>76.41%	>72.48%	≤0.3 W

Product Range

Product Image	Cat No	Description	Length (m)	Sockets	Amps
	CMU10134SL	Cassette Reel	10m	4 Sockets	13
	HMU15134SL	Case Reel	15m	4 Sockets	13
	OMU25134SL	Open Reel	25m	4 Sockets	13
	OLU50134SL	Open Reel	50m	4 Sockets	13
	OTLU40134SL	Heavy Duty Metal Open	40m	4 Sockets	13
	OMU2513FL3IP	Reverse Open Reel	25+3m	1 Socket	13
	OATRU3013FL3IP	Anti-Twist Reverse Reel	30+3m	1 IP54 Socket	13
	OATFU30134SL	Anti-Twist Fixed Socket	30m	4 Sockets	13
	OMU25132UAC20SL	Open Reel with USB A + C	25m	2 Sockets + USB	13

Masterplug are proud to offer a 5 year warranty on its range of Pro-XT portable power products from the date of purchase. Please see our website www.masterplug.com for more details.

UK Sales & Distribution Centre

Luceco plc
Stafford Park 1, Telford, Shropshire, England, TF3 3BD
Tel: +44 (0) 1952 238 100 Fax: +44 (0) 1952 238 180
Email: sales@masterplug.com

www.masterplug.com

Tech Help Line: (UK) 03300 249 279
(Non UK) +44(0) 1952 238 100



**POWER
AT WORK**

