



Technical Specification

25m Open Reel with USB A + C OMU25132UAC20SL


Features

- » Lightweight open reel with USB A + C (max 20W PD)
- » Safety thermal cut-out
- » Power on/off switch
- » Power LED indicator
- » Easy wind handle
- » Compatible with wall mount bracket

Description

Lightweight and sturdy, this portable open reel with 25 metres of cable and USB A + C ports, is ideal for charging mobile devices whilst working. Designed and engineered for longevity, the metal frame provides reliable protection when in use, transported or stored. This cable reel provides two shuttered sockets, two USB ports (max 20W PD), power switch, LED indicator, high visibility green cable and has a built-in safety thermal cut-out for protection against over-loading when fully reeled.

Line Diagrams

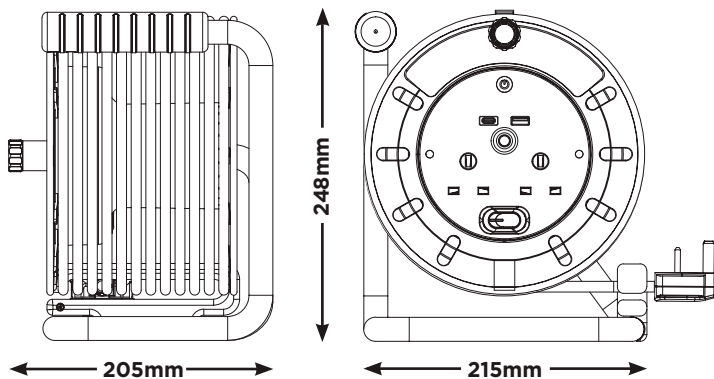

Product Information

Part No	OMU25132UAC20SL	Qty	1
Type	Open Reel with USB A + C	Shipping Carton Info (m)	H: 0.27 x W: 0.22 x D: 0.23
Cable Type	PVC	CBM (m ³)	0.013
Cable Length (m)	25m	G.W (kg)	3.9
Amp	13	EAN Barcode	5015056764924
Product Dimensions (cm)	H: 24.8 x W: 21.5 x D: 20.5	ITF Barcode	05015056765020

Technical Specifications

Standards	BS EN 61242. ASTA Approved
Maximum Load	720W/240V - Fully Wound 3120W/240V - Fully Unwound
Switch	Double Pole
Cable Size	1.25mm ² (H05VV-F)



Lic 940



Technical Data (Tested at 230V~ 50Hz)

	USB Output	Average Active Efficiency	Efficiency at 10% Load	No Load Power Consumption
USB A	5.0V⇒3A 15.0W	>81.39%	>72.48%	≤0.1 W
	9.0V⇒2A 18.0W	>85.00%	>75.45%	≤0.1 W
	12V⇒1.5A 18.0W	>85.00%	>75.45%	≤0.1 W
USB C	5.0V⇒3A 15.0W	>81.39%	>72.48%	≤0.1 W
	9.0V⇒2.22A 20.0W	>85.47%	>75.96%	≤0.1 W
	12V⇒1.67A 20.0W	>85.47%	>75.98%	≤0.1 W
USB C PPS	3.3V⇒1.8A 5.9W	>74.93%	>65.91%	≤0.1 W
	11.0V⇒1.8A 19.8W	>85.43%	>75.92%	≤0.1 W
USB A + C	5.0V⇒ 3A 15W	>76.41%	>72.48%	≤0.3 W

Product Range

Product Image	Cat No	Description	Length (m)	Sockets	Amps
	CMU10134SL	Cassette Reel	10m	4 Sockets	13
	HMU15134SL	Case Reel	15m	4 Sockets	13
	OMU25134SL	Open Reel	25m	4 Sockets	13
	OLU50134SL	Open Reel	50m	4 Sockets	13
	OTLU40134SL	Heavy Duty Metal Open	40m	4 Sockets	13
	OMU2513FL3IP	Reverse Open Reel	25+3m	1 Socket	13
	OATRU3013FL3IP	Anti-Twist Reverse Reel	30+3m	1 IP54 Socket	13
	OATFU30134SL	Anti-Twist Fixed Socket	30m	4 Sockets	13
	OMU25132UAC20SL	Open Reel with USB A + C	25m	2 Sockets + USB	13

Masterplug are proud to offer a 5 year warranty on its range of Pro-XT portable power products from the date of purchase. Please see our website www.masterplug.com for more details.

UK Sales & Distribution Centre

Luceco plc
Stafford Park 1, Telford, Shropshire, England, TF3 3BD
Tel: +44 (0) 1952 238 100 Fax: +44 (0) 1952 238 180
Email: sales@masterplug.com

www.masterplug.com

Tech Help Line: (UK) 03300 249 279
(Non UK) +44(0) 1952 238 100



**POWER
AT WORK**

