

AZURAR TWIN WALL LANTERN

- Decorative modern design with waterproof die cast housing
- Twin A60 lamp holders
- Decorative filament LED lamp included
- IP44 weather protection
- Available in black and slate grey



BLACK
FINISH

SLATE
GREY
FINISH


CAT NO.	FINISH
LEXDGLWTB	Black
LEXDGLWTG	Slate Grey



Decorative lamps included



Product Drawing

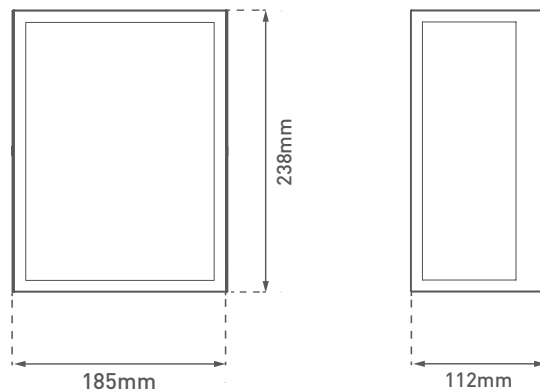

CAT NO.	LAMP BASE	WATTAGE	IP RATING	FREQUENCY (Hz)	IK RATING
LEXDGLWTB	E27	2x40W MAX	IP44	50/60	IK02
LEXDGLWTG	E27	2x40W MAX	IP44	50/60	IK02

CAT NO.	INPUT VOLTAGE (V)	FREQUENCY (Hz)	MAX POWER	LUMINAIRE LUMENS	EFFICACY (Llm/W)	CRI	CCT	POWER FACTOR	OPERATING TEMP RATED LIFE (°C)	LIFESPAN (Hrs)	SWITCHING CYCLE	L/B RATED LIFE
LA27W7F81	220-240	50/60	7W	810	115.7	>80	2700K	≥ 0.5	25	15,000	12,500	L70 / B50

STANDARD	DESCRIPTION
EN 60598-1	Luminaires – General requirements
EN 60598-2-1	Luminaires – Fixed general purpose
EN 61000-3-2	Electromagnetic compatibility (EMC) – Part 3-2: Limits - for harmonic current emissions
EN 61000-3-3	Limits - Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection
EN 61547	Equipment for general lighting purposes – EMC immunity requirements
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment

