



PARTITION LEGEND	
SYMBOL	DESCRIPTION
	DOTTED INDICATES DEMOLITION OF EXISTING CONSTRUCTION. PATCH ALL ADJACENT SURFACES (WALLS, FLOOR, ACT, ETC.) AS REQUIRED BY NEW FINISHES.
	EXISTING PARTITION TO REMAIN. COMPLETE CONSTRUCTION AS REQUIRED. PATCH AND PREP AS REQUIRED TO ACCEPT NEW FINISHES.
	PROVIDE NEW BUILDING STANDARD INSULATED TENANT PARTITION FROM FLOOR TO UNDER SIDE OF EXISTING SUSPENDED CEILING, MATCH EXISTING DETAILS.
	PROVIDE BUILDING STANDARD (1) HOUR RATED FULL HEIGHT INSULATED TENANT SEPARATION WALL FROM FINISHED FLOOR TO UNDERSIDE OF DECK. WALL TO BE 3 ½", 25 GAUGE METAL STUDS AT 16" O.C. WITH (1) LAYER OF ½" TYPE "X" G.W.B. EACH SIDE, TAPED & SPACKLED TO ACCEPT NEW FINISH. SAFE OFF FLUTES AT DECK WITH FIRE SAFE INSULATION. WALL TO MEET UL DESIGN *U465 REQUIREMENTS.

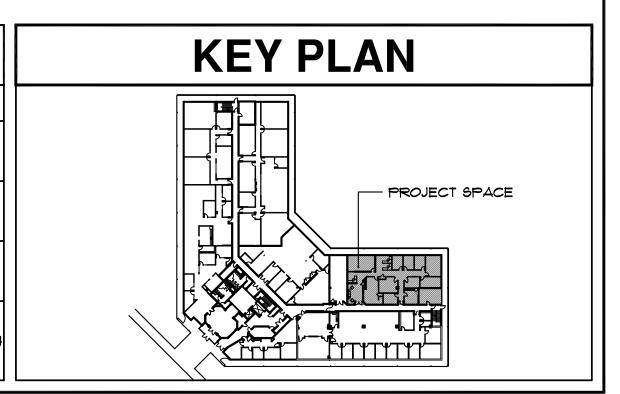

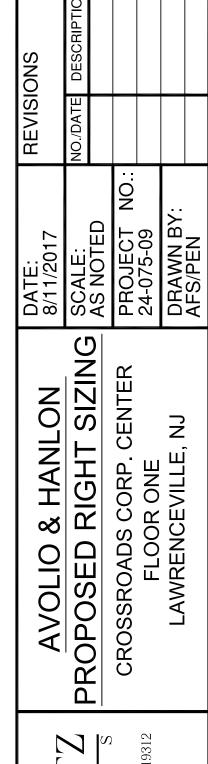

OLEK SCHWART

1180 West Swedesford Road Suite 1 (610) 889-9090 Fax (610) 889-9335

DRAWING TITLE PROPOSED FLOOR PLAN

SK-1