
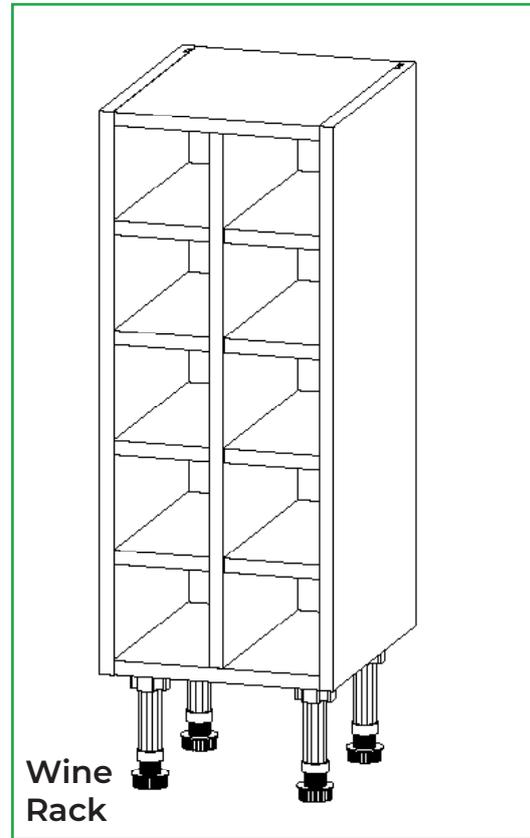



FEATURE UNIT

Base Unit

150 - 650, Open Base/Wine Rack (Slimline) - Fitting Guide

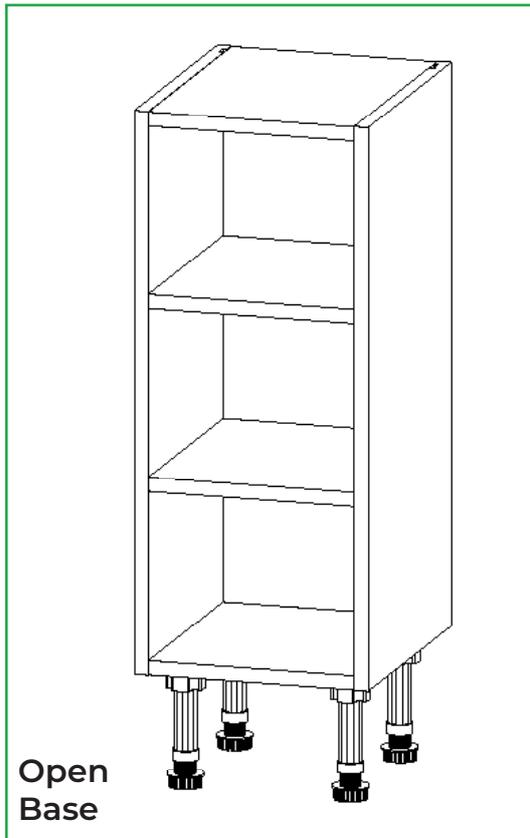

Unit Parts

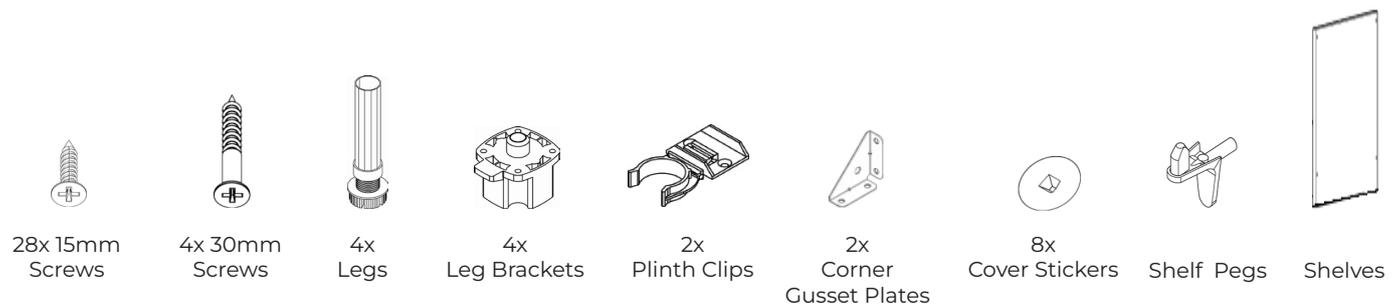

Tools Required




Remember to take care when unpacking. Please keep your workspace clean, clear and tidy when working. This will help keep all items safe from any damage. Any un-needed cardboard or plastic should be flattened down and placed in the bin.

A minimum of two people will be needed to lift the unit.

Unpacking the parts and fittings

Remove all content from the packaging and ensure to familiarise yourself with all unit parts and fittings.



All parts and fittings should be kept on a clean and level surface and the frontal and shelf placed in the door safe along their longest length.

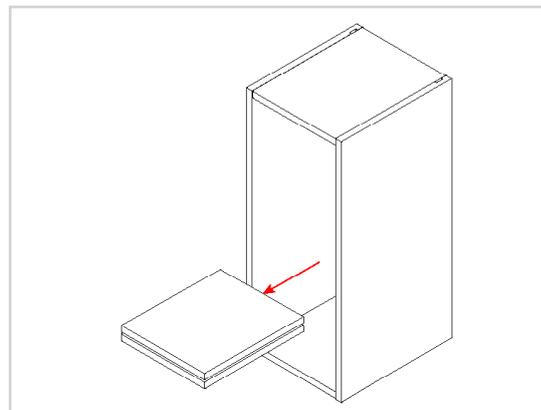

Not all shelving can be removed from the wine rack unit.


Positioning the leg brackets

Locate the leg brackets and position, as shown in the diagram. Ensure the leg brackets are rotated so the flange covers the outer edge, as this provides support for the edge of the unit.

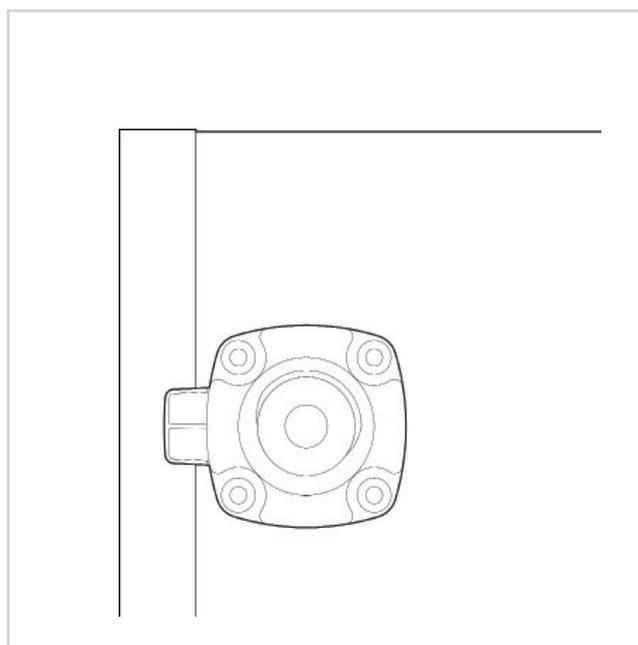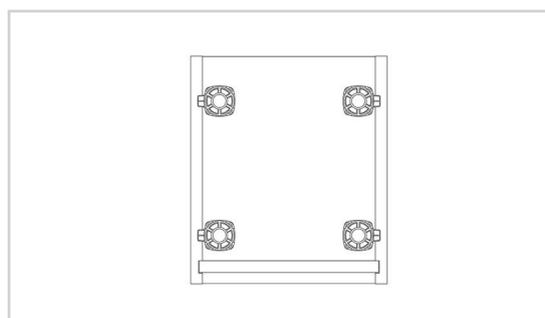

Fixing the leg bases


Secure each of the leg brackets into place with **4x15mm** screws per bracket.

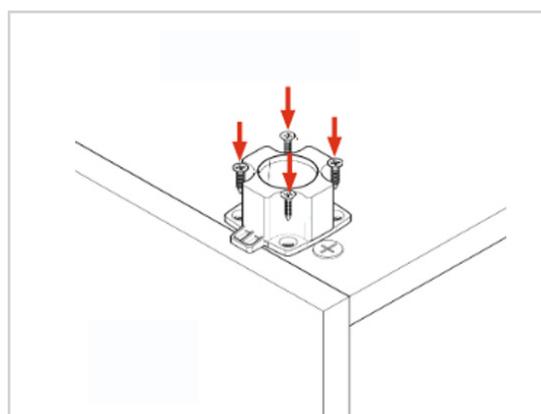

Inserting the legs

Push each leg firmly down into the leg bracket. Adjusting each leg to **155mm (165mm Linea/Milano)**

Adjust the legs to the correct height by turning clockwise or anti-clockwise.

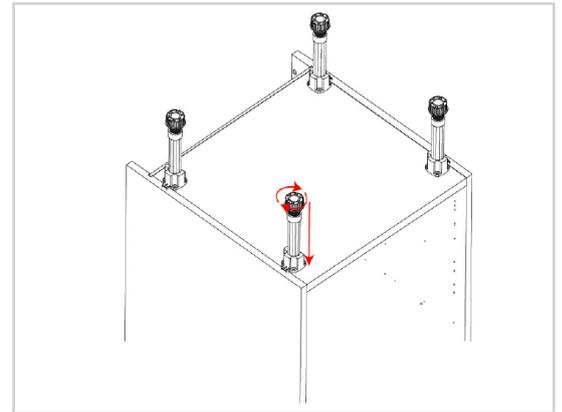


Lifting the unit into place

When lifting the unit into place do **not** tilt as this can damage the legs.

Place the unit into position and align it with the wall markings that will have been drawn during the room preparation stage.

Use a spirit level to ensure the unit is level from front to back, left to right, and diagonally. Adjust the legs if required.

The leg height can be adjusted by turning the foot of the leg clockwise or anti-clockwise.

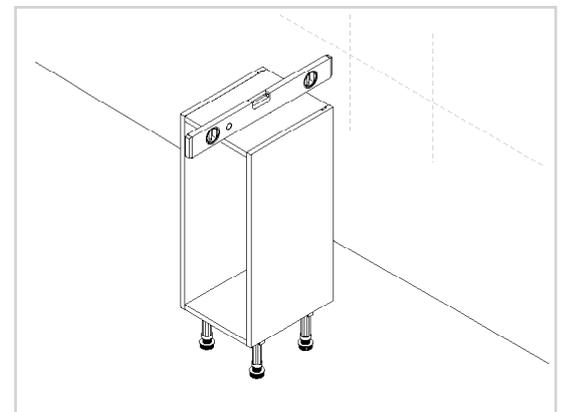


Please note that the open wine rack units have fixed shelf heights that cannot be adjusted

Finding the shelf height

Position the shelf pegs into the pre-drilled holes. The shelf can be positioned at **3** different heights, as shown in the diagram.

Place the shelf into position so the pin of the shelf peg is inserted into the pre-drilled holes.

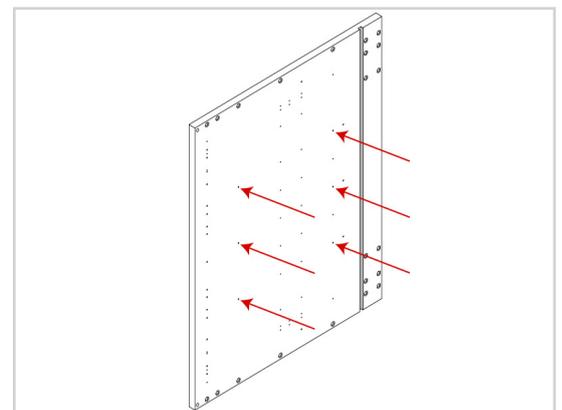


Securing to adjacent units

Clamp together the two units, checking the front edges are level and flush.

Using the screws provided, **1x30mm** screw should be fixed, from the inside of the adjacent units, into each corner of the unit.

The screws can be concealed by placing them behind hinge plates or behind shelves. Cover caps can be used to hide any visible screw heads that remain.

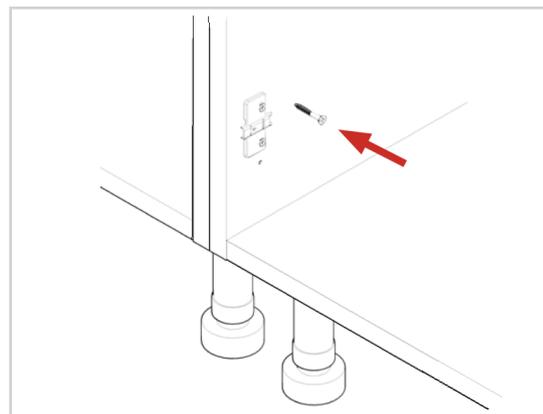


If screws cannot be hidden, secure from inside the feature unit and use cover stickers.

The following steps are for units planned on the end of a run of units.

Please refer to the decor panel fitting guide for additional info on cutting and securing the decor panel to the unit.

Securing the L-brackets to the decor panel (if required)


Using **2x15mm** screws, attach an L-bracket to the back of the decor panel on the side nearest the wall at the top of the decor panel.

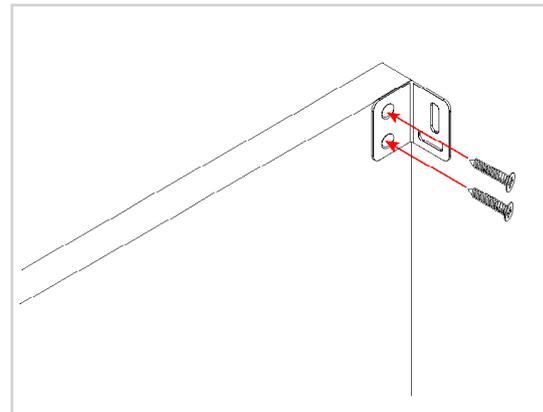

Securing the decor panel to the unit (if required)

Clamp together the decor panel with the unit, checking the front edges are level and flush.

Using the screws provided, **1x30mm** should be fixed alongside the shelf pegs at the top and bottom of the unit.

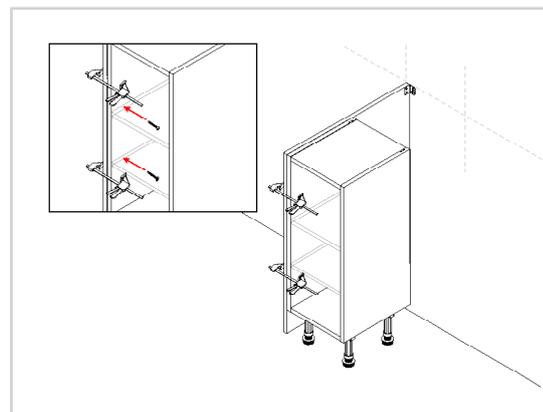


No screws or wall plugs are provided for attaching the unit to the wall.
This is due to variations in wall construction.

Before drilling into the wall you **MUST** check for any hidden services or pipework within the walls.

Securing the decor panel to the wall (if required)

For guidance on the appropriate wall fixing for each wall type, please consult the “**Room Preparation Guide.**”


Using the appropriate screws and wall fixings, secure the decor panel to the wall using the L-brackets.

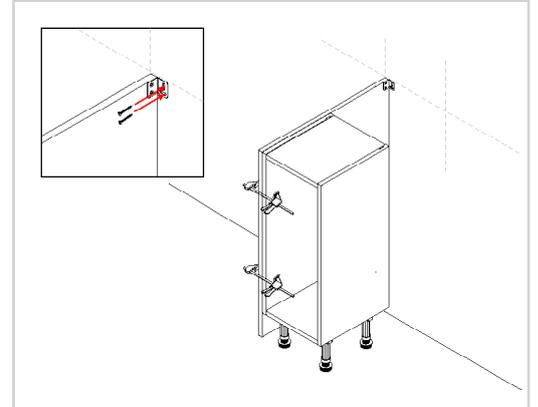

Sealing the decor panel

Using silicone, seal the edges of the decor panel along the floor and wall.


Remove the clamps.

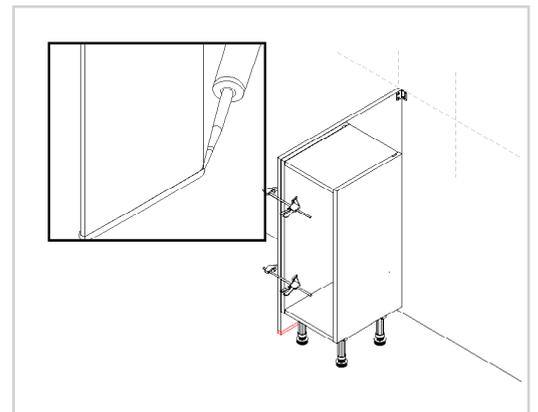

The following steps are for units that require securing to the wall


Installing the corner gussets

Secure the corner gussets to both the top corners of the wall unit using **4x15mm** screws per gusset.

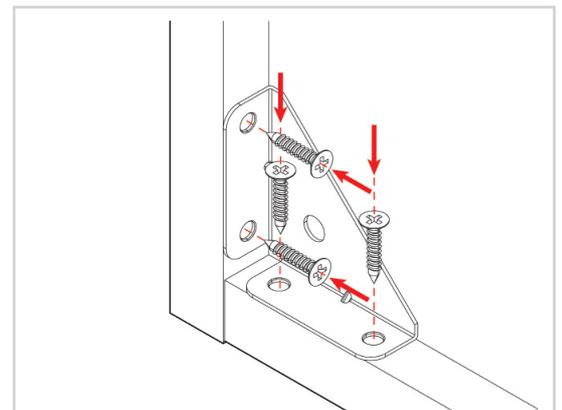

Creating the pilot holes

Drill small pilot holes through the back panel of the unit through each gusset.

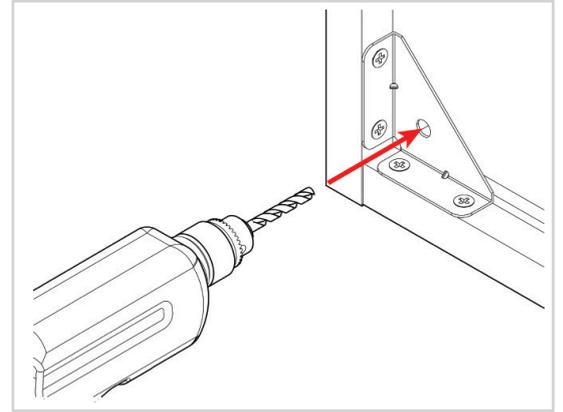


No screws or wall plugs are provided for attaching the unit to the wall.
This is due to variations in wall construction.

Before drilling into the wall you MUST check for any hidden services or pipework within the walls.

Fixing the unit to the wall

Fix to the wall through the gussets using the appropriate screws to attach to the wall.

Use the cover caps to conceal the screws.

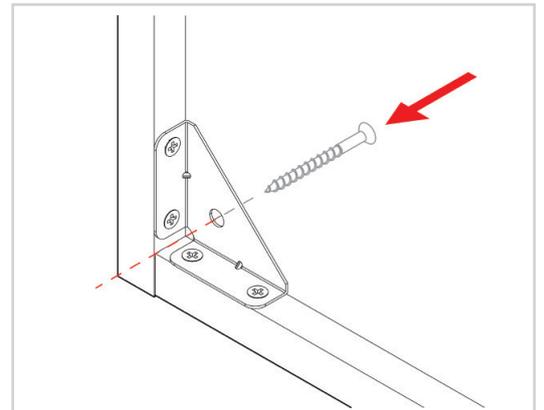


Placing the shelf into position

Position the shelf pegs into the pre-drilled holes.

Place the shelf into position so the pin of the shelf peg is inserted into the pre-drilled holes.

The shelf will touch the back panel when installed, if there is a gap between the back panel and shelf then the shelf has been installed back to front and the shelf needs to be rotated.

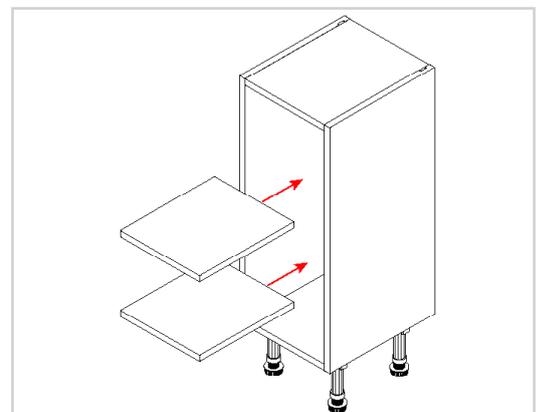

Cleaning the unit

Finally, the unit should be thoroughly cleaned to remove any debris that may have accumulated during the installation.



Store the plinth clips and the remaining 15mm screws.
These will be used later when attaching the plinth.