

The WM-5265 Wireless Microphone employs an dynamic microphone capsule and is suitable for any applications. Thanks to the PLL-synthesizer system, 64 different operating frequencies are made available. A high output power ensures stable radio signal transmission.




Article number: WM-5265 H01  
Alternative products: WM-5270 H01,  
WM-5225 H01

## Specifications

Power source	Battery (1 AA size alkaline battery, 1.5 V or WB-2000-2)
Battery life	10 h
Microphone type	Dynamic
Directivity	Hypercardioid
Frequency range	578 – 606 MHz
Selectable frequencies	64
Simultaneous channels	16
AF response	100 Hz - 15 kHz
RF output power	10 mW
Maximum SPL	132 dB
Dimensions (W x H x D)	x 229
Dimensions (ø x D)	50 x 229 mm
Finish	Resin, black,
Operating humidity	30% - 85%
Operating temperature	-10°C ... +50°C

Appearance

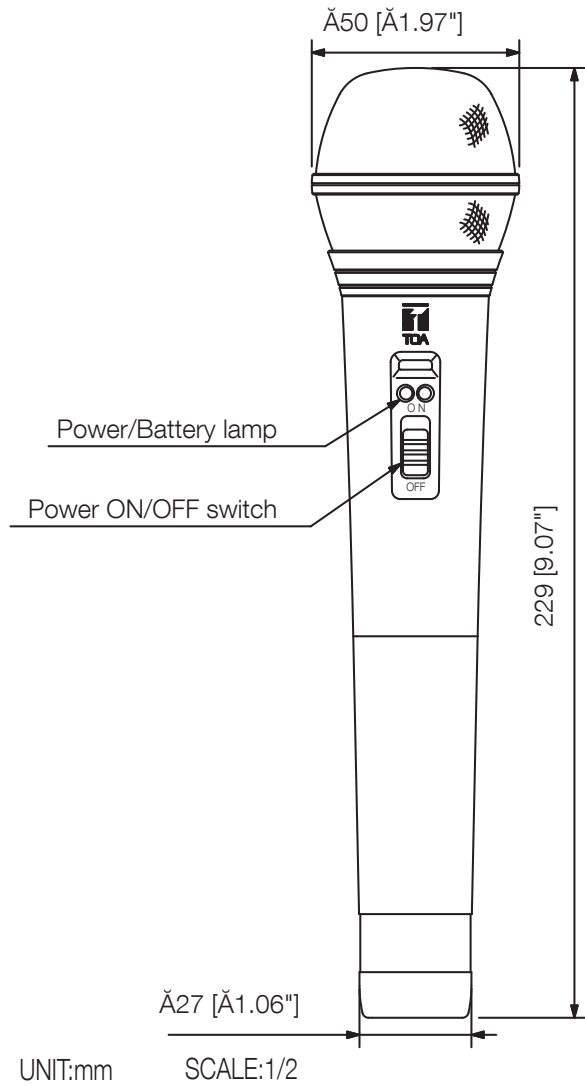

\*

Type	Frequency Range
A01	692 - 722 MHz, UHF
B01, B02	722 - 752 MHz, UHF
C01 - C07	794 - 830 MHz, UHF
D01 - D05	830 - 865 MHz, UHF
E01	668 - 698 MHz, UHF
F01	636 - 666 MHz, UHF
G01, G02	606 - 636 MHz, UHF
H01	576 - 606 MHz, UHF
K01	925 - 937.5 MHz, UHF

