


DH-PFS3006-4GT-60

6-Port Unmanaged Gigabit PoE Switch with 4-Port PoE



* The parameters and datasheets below can only be applied to V2.0 (version 2.0)

- Intelligent PoE
- Hi-PoE 60W (orange port)
- Long distance PoE
- PoE watchdog
- All-gigabit PoE ports
- Wide working temperature



System Overview

DH-SG1006P is an unmanaged Desktop Switch with 4 × 10/100/1000 Mbps PoE Ports. It provides 4 × 10/100/1000 Mbps Ethernet ports and 2 × 10/100/1000 Mbps uplink ports. The product is equipped with two types of transmission modes (Extend Mode On/Extend Mode Off). It also supports PoE watchdog to avoid manually maintenance and device restart, which can realize the intelligent management and reduce the cost.

Functions

Intelligent PoE

Provides control over power consumption and offers real-time monitoring to ensure power supplies receive priority with important ports and to prevent malfunctions caused by changes in power consumption. Supports ultra wide power supplies and is able to adapt to IPC power fluctuations.

Hi-PoE 60W (Orange Port)

In addition to the IEEE802.3af and IEEE802.3at standards, orange port also supports a maximum power output of 60W for powering high-power devices.

PoE Watchdog

Adopts the innovative PoE Watchdog. PoE Watchdog can be switched on by dialing or turning on the WEB page switch. It enables the switch to automatically detect port status and restart failed ports to recover connection in case of IPC connection exception. This enables intelligent operation and maintenance management in its truest sense, effectively reducing manual maintenance costs.

Long Distance PoE

By dialing or enabling long-range transmission on the WEB interface, the transmission distance of a PoE port can be up to 250 m, meeting the requirements of wired transmission (bandwidth reduced to 10 Mbps).

8-pin Assignment PoE Power Supply

Supports 8-pin simultaneous power supply (1/2/4/5 positive, 3/6/7/8 negative). Signal lines and idle lines supply power at the same time. Compatibility with IPC is enhanced. Cable loss is reduced. Loading capacity is increased.

Scene

The device is applicable for use in different scenarios, including home, office, server farm, and small mall.

Specification

Hardware Feature	
Ethernet Port	Port 1-4:4 × RJ-45 10/100/1000Mbps(PoE) Port 5-6:2 × RJ-45 10/100/1000Mbps(Uplink)
PoE Power Consumption	Port1≤ 60 W (Hi-PoE) Port2-4 ≤30 W Total≤60 W
Power Consumption	Idling: 0.96 W Full load: 60 W
Standard	IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3x

PoE	
PoE Protocol	IEEE802.3af/ IEEE802.3at/ Hi-PoE
Power Supply Pin	1, 2, 4, 5 (V+), 3, 6, 7, 8 (V-)
Long Distance	250 m long distance PoE transmission
PoE Power Management	Yes
PoE Watchdog	Yes

Performance	
Switching Capacity	14 Gbps
Packet Forwarding Rate	8.928 Mbps
Packet Buffer Memory	1 Mbit
MAC Address Table	2 K
Flow Control	Enable by default
Working Temperature	−10 °C to 55 °C (+14°F to +131°F)
Application Humidity	5%–95% (RH)

General	
Power Input	48 V- 57 V DC
Lighting Protection	Common mode: 4 kV Differential mode: 2 kV
ESD Protection	Air discharge: 8 kV Contact discharge: 6 kV
Wall-mount Installation	Yes
Anti-theft Lock Hole	Yes
Weight	0.30 kg (0.64 lb)
Dimension	130 mm × 85 mm × 26 mm (5.12" × 3.35" × 1.02")

Transmission Performance:


Switch power supply voltage 53V. CAT5E/CAT6. Max. DC resistance < 10 Ω/100 m		
Cable(m)	Load Capacity(W)	Bandwidth(Mbps)
IEEE802.3bt 90 W		
100	71.3	1000
150	62	10
200	51	10
250	40	10

Hi-PoE 60 W		
100	53	1000
150	50	10
200	47	10
250	37	10

IEEE802.3at 30 W		
100	25.5	1000
150	25.5	10
200	25.5	10
250	25.5	10

Note: Data from this table was collected by Dahua test lab and is for reference only .
The actual transmission distance may vary due to power consumption of connected devices or the cable type and status.

Dimensions (mm[inch])

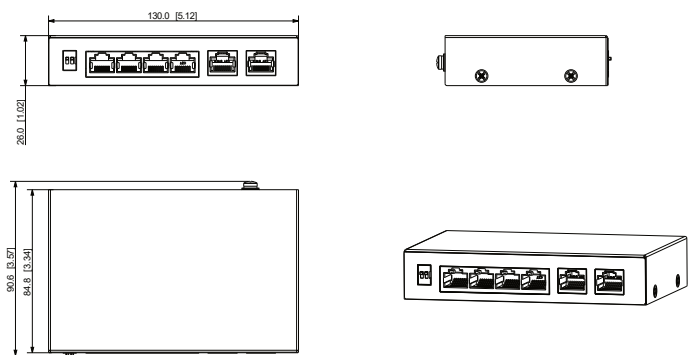

Panels

