



Trumpet shaped cable gland

Technical data

Ex-e Trumpet shaped cable gland

Marking accd. to 2014/34/EU	⊕ II 2 G Ex e II / ⊕ II 2 D Ex tD A21 IP66
EC-Type Examination Certificate	PTB 00 ATEX 3121
IEC-Ex Certificate of Conformity	IECEx BKI 08.0007
Marking accd. to IECEx	Ex e II / Ex tD A21 IP66 T85°C
Permissible ambient temperature	-40 °C up to +85 °C
Degree of protection accd. to EN 60529	IP66
Enclosure material	Polyamide


Ordering details

Thread	A/C mm	L mm	E mm	Ø Cable mm	A/F mm	Weight approx. kg	OU	Order No.
<b>Ordering details Trumpet shaped cable gland</b>								
M20 x 1.5	47	64	15	8 – 13	27	0.057	10	<b>GHG 960 1949 R0111</b>
M25 x 1.5	51	65	15	11 – 16	32	0.070	10	<b>GHG 960 1949 R0112</b>
M32 x 1.5	68	80	15	15 – 20	41	0.140	10	<b>GHG 960 1949 R0113</b>
M40 x 1.5	81	86	15	19 – 27	50	0.194	10	<b>GHG 960 1949 R0114</b>
M50 x 1.5	96	95	16	28 – 34	60	0.333	1	<b>GHG 960 1949 R0115</b>
M63 x 1.5	107	105	16	38 – 46	75	0.742	1	<b>GHG 960 1949 R0116</b>

The order No. will show 1 pcs.

Please note that only order units (OU) can be ordered.

Dimension drawing

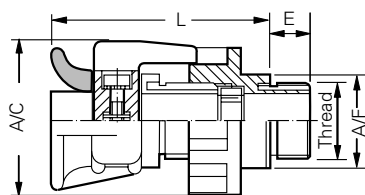

Trumpet shaped cable gland