


PRODUCT-DETAILS

# E296-CP

## E296-CP Compensator

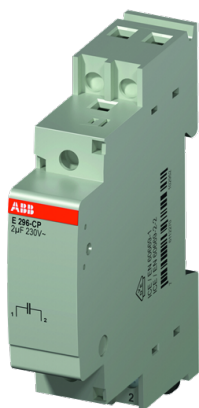

### Informations générales

Extension du type de produit	E296-CP
Code de produit	2TAZ310003R1000
EAN	7612270939473
Description courte	E296-CP Compensator

#### Description longue

Latching relays are electromagnetically operated devices. The E290 range from ABB can be used to realise a simple, energysaving and efficient lighting control system. These devices are mainly used in private houses, factory premises and commercial and public buildings as well as in industrial plants. As a rule, latching relays controlled by means of impulse buttons are installed where it is necessary for lighting to be operated from at least three different places. Each time a command is initiated (by means of an impulse button), an electrical pulse is applied to the coil of the latching relay. The coil in the device is briefly energised and activated. That short pulse to the coil leads to the mechanical latch of the internal main contacts. The internal switching mechanism enables us to achieve a safe and reliable interlock (in the same way as a ballpoint pen). Each pulse that is sent to the magnetic coil system switches the device back to its previous position where it is held mechanically until the next control pulse is received. The devices are designed for rated currents 16 and 32A. Through the combinable accessories the main modules can be used in nearly all market applications.

### Technique

Normes et standards	IEC/EN 60669-1 IEC/EN 60669-2-2
Tension nominale (U <sub>r</sub> )	250 V AC at 50 Hz 310 V AC at 60 Hz

Tension	250 V AC
Rated Control Supply Voltage (U <sub>s</sub> )	250 V AC
Fréquence assignée (f)	50 Hz
Number of Contacts NC	0
Number of Contacts NO	0
Number of Main Contacts NC	0
Number of Main Contacts NO	0
Number of Buttons	1&2 Latching Relay: 8 without compensator 18 with 1 compensator 45 with 2 compensator 3&4 Latching Relay: 9 without compensator 22 with 1 compensator 38 with 2 compensator
Couple de serrage	1.2 - 1.5 N·m
Type d'accessoire	Other
Type de montage	DIN-Rail
RAL Number	RAL 7035 - Gris clair
Couleur	Grey
Connecting Capacity	Solid 1 x 1 ... 10 mm <sup>2</sup> Flexible 2 x 2.5 mm <sup>2</sup> Flexible with Cable End 1 x 0.75 ... 6 mm <sup>2</sup> Flexible with Cable Lug 1 x 0.75 ... 6 mm <sup>2</sup>

## Environnement

Température de l'air ambiant	Operation -25...+55 °C Storage -40...+70 °C
Statut RoHS	Following EU Directive 2011/65/EU and Amendment 2015/863 July 22, 2019
Informations RoHS	2CCC005102D0201
REACH Declaration	2CCC005047D0201
Informations environnementales	2CCC441012D0202
Conflict Minerals Reporting Template (CMRT)	9AKK108468A3363

## Dimensions

Produit Largeur Net	18 mm
Produit Hauteur Net	85 mm
Produit Longueur Net	58 mm
Poids net	55 g
Schéma dimensionnel	9AKK107992A6185

## Commande

Emballage Niveau 1 Unités	box 10 pièce
Emballage Niveau 1 Poids	626 g
E-Number (Sweden)	4001597

## Certificats et Déclarations (Numéro de document)

Déclaration de Conformité - CE	2CCC005102D0201
Declaration of Conformity - UKCA	9AKK108467A6139
EAC Certificate	9AKK107992A1778
VDE Certificate	VDE E29x_40040851

## Installation

Instructions et manuels	2CCC441005M0801
-------------------------	-----------------

## Downloads Préférés

Fiche produit, informations techniques	2CCC441020C0201
-------------------------------------------	-----------------

## Classifications

ETIM 8	EC002586 - Accessories/spare parts for switching relay
ETIM 9	EC002586 - Accessories/spare parts for switching relay
Catégorie DEEE	5. Small Equipment (No External Dimension More Than 50 cm)
WEEE B2C / B2B	Business To Consumer
CN8	85362020
eClass	V11.0 : 27371692
Code de classification d'objet	K

## Catégories

Produits basse tension → Appareillage modulaire et parafoudres → Command and Signalling Devices → Latching Relays

