1SET313060R0000 - ACTIVE

ENTRELEC | M12 Connector

TE Internal #: 1SET313060R0000 M12 Pigtail Cable Assembly, 4 Position, 1 m, Sensor/Actuator, Code A, M12 Socket, Single Ended, GF Nylon View on TE.com >

connectivity

Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies



M8/M12 Application Type: Sensor/Actuator

Number of Positions: 4

Keying Code: A

Connector Type (End A): M12 Socket

Cable Assembly Type: M12 Pigtail

Features

Product Type Features

LED	Without
Product Type	Cable Assembly
Cable Type	PUR
Assembly Type	Pigtail
Connector Type (End A)	M12 Socket
Cable Assembly Type	M12 Pigtail
Configuration Features	
Number of Positions	4
Keying Code	A
Electrical Characteristics	
Operating Voltage	250 VDC
Body Features	
Cable Exit Angle	Right Angle
Environmental Protection	With

1SET313060R0000

M12 Pigtail Cable Assembly, 4 Position, 1 m, Sensor/Actuator, Code A, M12 Socket, Single Ended, GF Nylon



Conductor Material	Copper Alloy
Connector Color	Blue
Cable Jacket Color	Gray
Insulation Material	PVC
Contact Features	
Contact Current Rating	4 A
Mechanical Attachment	
Screw & Hole Thread Size	M12
Connector Orientation (End A)	Right Angle
Housing Features	
Housing Material	GF Nylon
Dimensions	
Wire Size	22 AWG
Operation/Application	
M8/M12 Application Type	Sensor/Actuator
Shielded	No

Packaging Features

Packaging Method

Box

Other

Field Serviceable	Yes
Cable Assembly Length	1 m
Cable Assembly Configuration	Single Ended

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.

1SET313060R0000

M12 Pigtail Cable Assembly, 4 Position, 1 m, Sensor/Actuator, Code A, M12 Socket, Single Ended, GF Nylon



Solder Process Capability

Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts



Also in the Series M12 Connector

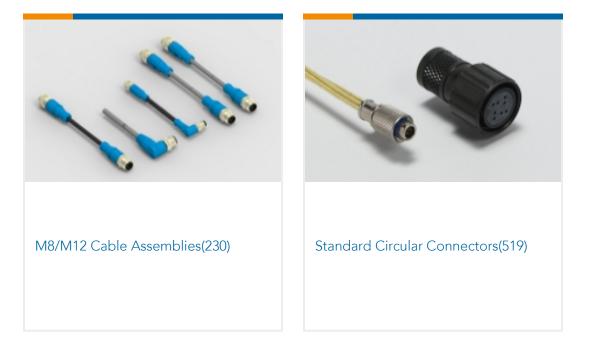

Documents

Product Drawings M12-FR-4P-PUR-1.0

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1SET313060R0000_A.2d_dxf.zip

English

1SET313060R0000

M12 Pigtail Cable Assembly, 4 Position, 1 m, Sensor/Actuator, Code A, M12 Socket, Single Ended, GF Nylon



Customer View Model

ENG_CVM_CVM_1SET313060R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SET313060R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Catalog - ENTRELEC-M8-M12-RJ45

English

Product Specifications
Application Specification

English