

ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

T8 UE-4FT Performance

MAS LEDTUBE 1200MM UE 11.9W 840 T8 EELA

Signify N.V.



EPD HUB

Publishing 6 September 2023

The Signify logo, featuring a green circle with a white 'S' inside, followed by the word 'ignify' in a green, lowercase, sans-serif font.

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Signify N.V
Address	High Tech Campus 48, 5656 AE Eindhoven, The Netherlands
Contact details	sustainability@signify.com
Website	https://www.signify.com/global

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Lighting
Category of EPD	Pre-verified EPD
Scope of the EPD	Cradle to gate with options, A4-B7, and modules C1-C4, D
EPD author	Sustainability Signify
EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input checked="" type="checkbox"/> Internal certification <input type="checkbox"/> External verification

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of lighting products may not be comparable if they do not comply with EN 15804 and if they are not compared in a lighting context.

PRODUCT

Product name	T8 UE-4ft Performance
Additional labels	MAS LEDTUBE 1200MM UE 11.9W 840 T8 EELA
Product reference	929003482202
Place of production	China
Period for data	2022
Averaging in EPD	No averaging
Variation in GWP-fossil for A1-A3	%

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 Unit
Declared unit mass	0.244 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	6.87E0
GWP-total, A1-A3 (kgCO ₂ e)	6.81E0
Secondary material, inputs (%)	10.5
Secondary material, outputs (%)	53.7
Total energy use, A1-A3 (kWh)	24.4
Total water use, A1-A3 (m ³ e)	-5.4E-3

PRODUCT AND MANUFACTURER

ABOUT THE MANUFACTURER

Signify is the world leader in lighting for professionals, consumers and lighting for the Internet of Things. Our energy efficient lighting products, systems and services enable our customers to enjoy a superior quality of light, and make people's lives safer and more comfortable, businesses more productive and cities more liveable.

For more information, please visit: <https://www.signify.com/global>

PRODUCT DESCRIPTION

With energy prices rising and the EU's Green Deal2 continuing to fund energy efficient building renovations, many are looking into make their company's lighting more sustainable. The new Philips MASTER LEDtube Ultra Efficient T8 is a true breakthrough on the way to more sustainable lighting. It replaces your current fluorescent tube or LED tube directly and offers immediately great energy cost reduction as well as a much longer lifetime.

For more information, please visit:

[MAS LEDtube 1200mm UE 11.9W 840 T8 EELA | 929003482202 | Philips lighting](#)

PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	48.948	China
Minerals	0	Not applicable
Fossil materials	51.052	China
Bio-based materials	0	Not applicable

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0.0206

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 Unit
Mass per declared unit	0.244 kg
Functional unit	2500 lumens over 100000 hours
Reference service life	100000

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MNR	MNR	MNR	MNR	MNR	x	MNR	MNR	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, electricity, and waste formed in the production processes at Signify's manufacturing facilities are included in this stage.

The product is made of metals, plastics, and electronic components. All components are transported to Signify's production facility, where the main manufacturing processes primarily are associated with assembly. The finished product is packaged with polyethylene, cardboard, and/or paper as packaging material before being sent to customers

TRANSPORT AND INSTALLATION (A4-A5)

Transportation distance is defined according to the PCR. The average distance of transportation from suppliers in Europe to manufacturing sites in Europe and from suppliers in Asia to manufacturing sites in Asia was assumed to be 2000 km by lorry. In the case of intercontinental

transportation, a conservative average distance of 20000 km by a container ship (sea) was assumed. The same applies to distances from manufacturing sites to customers. Environmental impacts from installation include waste packaging materials (A5). The impacts of energy consumption and the used ancillary materials during installation are considered negligible.


PRODUCT USE AND MAINTENANCE (B1-B7)

During the use phase, the product consumes electricity from Europe's electricity grid mix (B6). Impacts due to electricity production include direct emissions to air, transformation, and transmission losses. The non-functional parts that are replaced are disposed and sent to waste treatment in the same module. Air, soil, and water impacts during the use phase have not been studied.

PRODUCT END OF LIFE (C1-C4, D)

Consumption of energy and natural resources in demolition process is assumed to be negligible. It is assumed that the waste is collected separately and transported to the waste treatment centre. Transportation distance to treatment is assumed as 150 km and the transportation method is assumed to be lorry (C2). According to EN 50693:2019, the sequence of treatment operations occurring to the product shall include de-pollution, fractions separation and preparation (dismantling, crushing, shredding, sorting), recycling, other material recovery, energy recovery and disposal. In this study, the default values from table G.4 of EN 50693 is used for treating materials in different waste treatment methods. Due to the material and energy recovery potential of parts in the lighting system, the end-of-life product is converted into recycled raw materials, while the energy recovered from incineration displaces electricity and heat production (D). The benefits and loads of incineration and recycling are included in Module D.

MANUFACTURING PROCESS

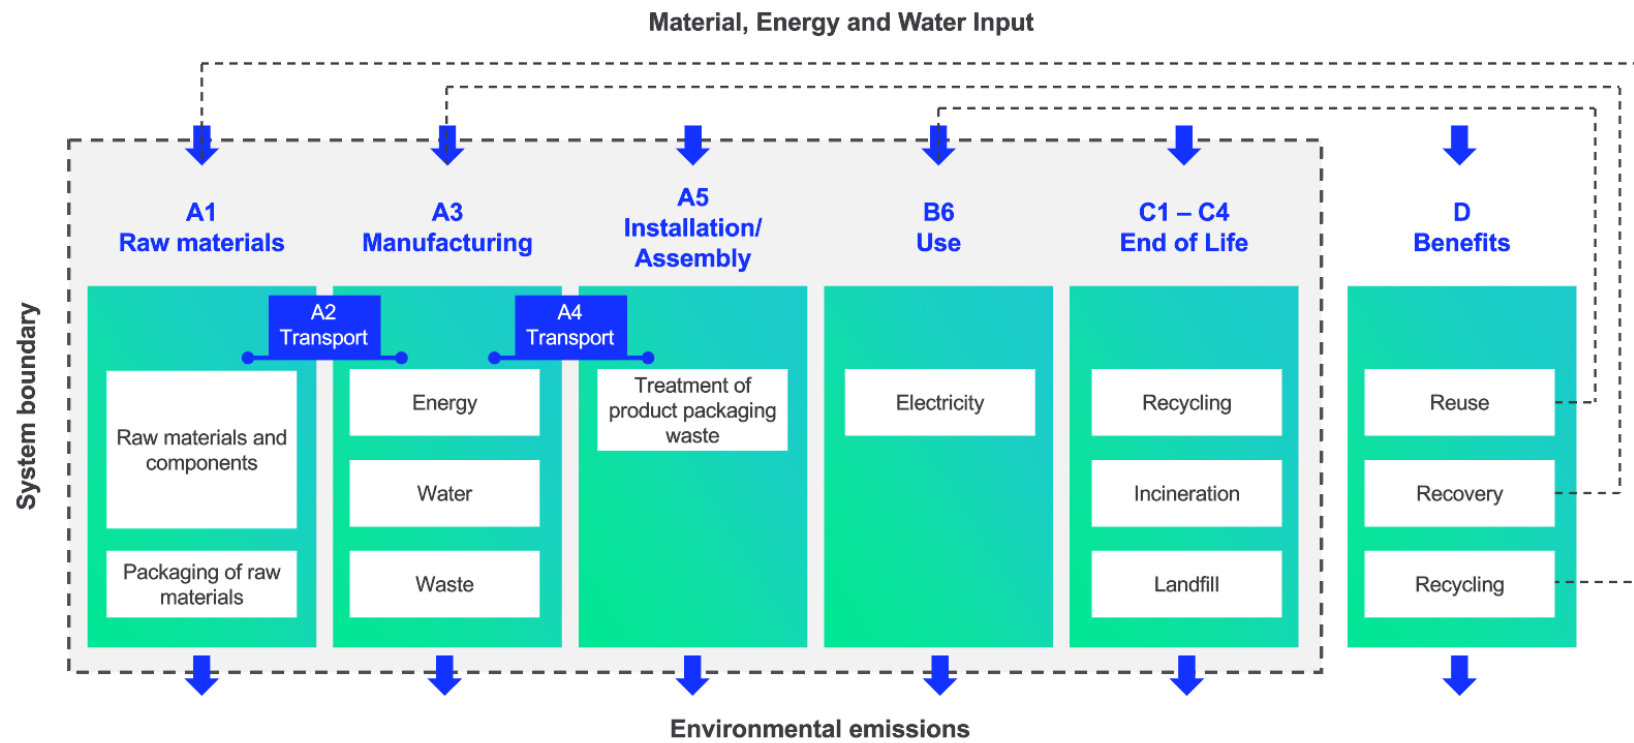

LIFE LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, ancillary materials, energy & water consumption, material loss and waste generation at the manufacturing site are attributed to the bill of materials of the products, therefore, they are allocated by partitioning the quantities on the base of the total production in kg throughout the year. Thus, allocation has been done in the following ways:

Data type	Allocation
Raw materials	No allocation
Packaging materials	No allocation
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

This EPD is created with a most conservative scenario in A1-A3 in terms of material composition.

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations. It is created with a most conservative scenario in A1-A3 in terms of material composition.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. EcoInvent 3.8 database was used as the source of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO _{2e}	6.51E0	0E0	2.99E-1	6.81E0	5.59E-2	7.53E-2	MNR	MNR	MNR	MNR	MNR	8.71E2	MNR	3.17E-3	3.32E-3	1.4E-1	7.36E-2	-1.54E0
GWP – fossil	kg CO _{2e}	6.5E0	0E0	3.74E-1	6.87E0	5.59E-2	0E0	MNR	MNR	MNR	MNR	MNR	8.69E2	MNR	3.17E-3	3.32E-3	1.4E-1	7.36E-2	-1.54E0
GWP – biogenic	kg CO _{2e}	2.94E-4	0E0	-7.53E-2	-7.5E-2	0E0	7.53E-2	MNR	MNR	MNR	MNR	MNR	0E0	MNR	0E0	0E0	-2.85E-5	0E0	-8.66E-4
GWP – LULUC	kg CO _{2e}	1.07E-2	0E0	1.16E-3	1.18E-2	4.08E-5	0E0	MNR	MNR	MNR	MNR	MNR	1.82E0	MNR	4.06E-6	1.22E-6	3.62E-6	2.86E-6	-4.26E-4
Ozone depletion pot.	kg CFC _{11e}	4.73E-7	0E0	1.86E-8	4.92E-7	1.11E-8	0E0	MNR	MNR	MNR	MNR	MNR	2.93E-5	MNR	1.05E-10	7.63E-10	5.04E-10	4.16E-10	-4.19E-8
Acidification potential	mol H ⁺ e	4.95E-2	0E0	2.05E-3	5.16E-2	1.82E-3	0E0	MNR	MNR	MNR	MNR	MNR	4.42E0	MNR	1.29E-5	1.4E-5	5.33E-5	2.63E-5	-1.66E-2
EP-freshwater ²⁾	kg Pe	8.06E-4	0E0	7.82E-5	8.85E-4	1.99E-7	0E0	MNR	MNR	MNR	MNR	MNR	4.56E-2	MNR	1.17E-7	2.71E-8	1.18E-7	6E-8	-9.73E-5
EP-marine	kg Ne	7.15E-3	0E0	1.99E-3	9.14E-3	4.47E-4	0E0	MNR	MNR	MNR	MNR	MNR	7.46E-1	MNR	3.24E-6	4.17E-6	1.94E-5	1.39E-5	-1.73E-3
EP-terrestrial	mol Ne	8.07E-2	0E0	5.14E-3	8.58E-2	4.97E-3	0E0	MNR	MNR	MNR	MNR	MNR	8.31E0	MNR	2.6E-5	4.6E-5	2.05E-4	1.09E-4	-2.02E-2
POCP (“smog”) ³⁾	kg NMVOCe	2.51E-2	0E0	1.56E-3	2.66E-2	1.29E-3	0E0	MNR	MNR	MNR	MNR	MNR	2.24E0	MNR	6.99E-6	1.47E-5	5.16E-5	2.89E-5	-5.8E-3
ADP-minerals & metals ⁴⁾	kg Sbe	8.83E-4	0E0	1.28E-6	8.84E-4	7.72E-8	0E0	MNR	MNR	MNR	MNR	MNR	4.07E-3	MNR	3.38E-8	7.77E-9	2.26E-7	1.05E-8	-9.34E-5
ADP-fossil resources	MJ	7.87E1	0E0	4.16E0	8.29E1	7.01E-1	0E0	MNR	MNR	MNR	MNR	MNR	1.13E4	MNR	2.99E-2	4.98E-2	4.81E-2	3.81E-2	-1.54E1
Water use ⁵⁾	m ³ e depr.	2.19E0	0E0	4.42E-1	2.63E0	2.08E-3	0E0	MNR	MNR	MNR	MNR	MNR	2.38E2	MNR	5.79E-4	2.23E-4	5.85E-3	3.81E-3	-1.52E-1

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO₄e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	4.1E-7	0E0	3.33E-8	4.44E-7	1.74E-9	0E0	MNR	MNR	MNR	MNR	MNR	3.35E-5	MNR	1.13E-10	3.82E-10	4.56E-10	2.87E-10	-9.61E-8
Ionizing radiation ⁶⁾	kBq U235e	5.04E-1	0E0	1.36E-2	5.18E-1	3.23E-3	0E0	MNR	MNR	MNR	MNR	MNR	1.27E2	MNR	3.16E-4	2.37E-4	2.13E-4	1.71E-4	-9.87E-2
Ecotoxicity (freshwater)	CTUe	4.43E2	0E0	3.79E1	4.81E2	4.44E-1	0E0	MNR	MNR	MNR	MNR	MNR	1.72E4	MNR	6.77E-2	4.48E-2	4.14E-1	1.31E1	-4.99E1
Human toxicity, cancer	CTUh	1.08E-8	0E0	4.04E-10	1.12E-8	3.35E-11	0E0	MNR	MNR	MNR	MNR	MNR	2.62E-7	MNR	1.55E-12	1.1E-12	1.56E-11	5.92E-11	-4.74E-10
Human tox. non-cancer	CTUh	3.17E-7	0E0	1.1E-8	3.28E-7	2.84E-10	0E0	MNR	MNR	MNR	MNR	MNR	9.69E-6	MNR	8.22E-11	4.43E-11	6.05E-10	3.79E-9	-6.69E-8
SQP ⁷⁾	-	2.71E1	0E0	6.72E0	3.38E1	9.63E-2	0E0	MNR	MNR	MNR	MNR	MNR	1.83E3	MNR	1.38E-2	5.74E-2	5.37E-2	4.74E-2	-4.19E0

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	7.02E0	0E0	1.3E0	8.33E0	4.82E-3	0E0	MNR	MNR	MNR	MNR	MNR	1.47E3	MNR	3.58E-3	5.61E-4	4.46E-3	1.52E-3	-5.71E-1
Renew. PER as material	MJ	0E0	0E0	6.92E-1	6.92E-1	0E0	-6.92E-1	MNR	MNR	MNR	MNR	MNR	0E0	MNR	0E0	0E0	0E0	0E0	0E0
Total use of renew. PER	MJ	7.02E0	0E0	2E0	9.02E0	4.82E-3	-6.92E-1	MNR	MNR	MNR	MNR	MNR	1.47E3	MNR	3.58E-3	5.61E-4	4.46E-3	1.52E-3	-5.71E-1
Non-re. PER as energy	MJ	7.53E1	0E0	4.08E0	7.94E1	7.01E-1	0E0	MNR	MNR	MNR	MNR	MNR	1.13E4	MNR	2.99E-2	4.98E-2	4.81E-2	3.81E-2	-1.54E1
Non-re. PER as material	MJ	3.27E0	0E0	1.19E-2	3.28E0	0E0	-1.19E-2	MNR	MNR	MNR	MNR	MNR	0E0	MNR	0E0	0E0	-1.6E0	-1.6E0	0E0
Total use of non-re. PER	MJ	7.86E1	0E0	4.1E0	8.27E1	7.01E-1	-1.19E-2	MNR	MNR	MNR	MNR	MNR	1.13E4	MNR	2.99E-2	4.98E-2	-1.55E0	-1.56E0	-1.54E1
Secondary materials	kg	2.57E-2	0E0	3.05E-2	5.62E-2	3.21E-4	0E0	MNR	MNR	MNR	MNR	MNR	1.04E0	MNR	7.22E-6	1.38E-5	4.7E-5	8.09E-5	5.42E-2
Renew. secondary fuels	MJ	2.46E-3	0E0	2.07E-3	4.53E-3	8.59E-7	0E0	MNR	MNR	MNR	MNR	MNR	7.24E-3	MNR	1.27E-6	1.4E-7	2.04E-6	8.64E-7	-1.75E-4
Non-ren. secondary fuels	MJ	0E0	0E0	0E0	0E0	0E0	0E0	MNR	MNR	MNR	MNR	MNR	0E0	MNR	0E0	0E0	0E0	0E0	0E0
Use of net fresh water	m ³	5.62E-2	0E0	-6.16E-2	-5.4E-3	4.47E-5	0E0	MNR	MNR	MNR	MNR	MNR	6.66E0	MNR	1.83E-5	6.45E-6	2.15E-4	1.14E-4	-6.11E-3

8) PER = Primary energy resources.

END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1.01E0	0E0	3.71E-2	1.05E0	9.58E-4	0E0	MNR	MNR	MNR	MNR	MNR	7.31E1	MNR	1.92E-4	6.6E-5	1.73E-4	2.5E-3	-2.25E-1
Non-hazardous waste	kg	1.32E1	0E0	4.09E-1	1.36E1	7.79E-3	0E0	MNR	MNR	MNR	MNR	MNR	1.96E3	MNR	1.36E-2	1.08E-3	6.24E-2	1.02E-1	-4.86E0
Radioactive waste	kg	1.66E-4	0E0	6.28E-6	1.72E-4	4.97E-6	0E0	MNR	MNR	MNR	MNR	MNR	3.49E-2	MNR	8.61E-8	3.33E-7	9.87E-8	0E0	-3.5E-5

END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0E0	0E0	0E0	0E0	0E0	0E0	MNR	MNR	MNR	MNR	MNR	0E0	MNR	0E0	0E0	0E0	0E0	0E0
Materials for recycling	kg	0E0	0E0	0E0	0E0	0E0	0E0	MNR	MNR	MNR	MNR	MNR	0E0	MNR	0E0	0E0	7.3E-2	0E0	0E0
Materials for energy rec	kg	0E0	0E0	0E0	0E0	0E0	0E0	MNR	MNR	MNR	MNR	MNR	0E0	MNR	0E0	0E0	0E0	0E0	0E0
Exported energy	MJ	0E0	0E0	7.89E-2	7.89E-2	0E0	0E0	MNR	MNR	MNR	MNR	MNR	0E0	MNR	1.28E0	0E0	0E0	0E0	0E0

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	6.31E0	0E0	3.95E-1	6.7E0	5.55E-2	0E0	MNR	MNR	MNR	MNR	MNR	8.51E2	MNR	2.94E-3	3.28E-3	1.4E-1	7.28E-2	-1.51E0
Ozone depletion Pot.	kg CFC ₁₁ e	4.36E-7	0E0	1.57E-8	4.51E-7	8.78E-9	0E0	MNR	MNR	MNR	MNR	MNR	2.45E-5	MNR	8.65E-11	6.04E-10	4.35E-10	3.48E-10	-3.55E-8
Acidification	kg SO ₂ e	4.16E-2	0E0	1.62E-3	4.32E-2	1.45E-3	0E0	MNR	MNR	MNR	MNR	MNR	3.69E0	MNR	1.06E-5	1.09E-5	4E-5	1.95E-5	-1.43E-2
Eutrophication	kg PO ₄ ³ e	1.97E-2	0E0	1.58E-3	2.13E-2	1.62E-4	0E0	MNR	MNR	MNR	MNR	MNR	1.6E0	MNR	5.98E-5	2.48E-6	2.2E-5	2.04E-4	-3.92E-3
POCP (“smog”)	kg C ₂ H ₄ e	3.06E-3	0E0	1.1E-4	3.17E-3	3.74E-5	0E0	MNR	MNR	MNR	MNR	MNR	1.48E-1	MNR	5.63E-7	4.26E-7	1.16E-6	1.2E-6	-6.79E-4
ADP-elements	kg Sbe	8.78E-4	0E0	1.2E-6	8.8E-4	7.59E-8	0E0	MNR	MNR	MNR	MNR	MNR	4.06E-3	MNR	3.37E-8	7.53E-9	2.23E-7	8.91E-9	-9.32E-5
ADP-fossil	MJ	7.81E1	0E0	4.15E0	8.23E1	7.01E-1	0E0	MNR	MNR	MNR	MNR	MNR	1.13E4	MNR	2.99E-2	4.98E-2	4.81E-2	3.81E-2	-1.54E1

APPENDIX (PEP ECOPASSPORT ALIGNED)

This section represents the scaling method for the **B6 module**, following the PEP EcoPassport PSR for luminaries (PSR-0014-ed2.0-EN-2023 07 13). The GWP results were scaled from the product Functional Unit to the PEP EcoPassport Functional Unit, based on the lumen output (O_{lum}) and reference service life (RSL) of the product.

To calculate the Scaled Impact (SI_{pep}), we have followed the below methods:

1. Calculate the GWP scaling factor (GSF), which is the ratio of the the PEP EcoPassport Functional Unit (FU_{pep}) and product Functional Unit (FU_p).

$$GSF = \frac{FU_{pep}}{FU_p} = \frac{1,000}{O_{lum}} * \frac{35,000}{RSL}$$

2. Calculate the Total Scaling factor by multiplying the GSF by the control scaling factor (CSF), where the CSF is determined according the relevant light management functions (e.g. if the luminaire has a presence detection system), as presented in Table A1.

$$TSF = GSF * CSF$$

Table A1: Light management function (PEP EcoPassport aligned)

Scenario	Abbrev.	CSF
No control	NC	1
Daylight dependency factor	DD	0.75
Presence sensing	PS	0.75
Daylight dependency and presence sensing	DD+PS	0.55

3. Using this GWP scaling factor, we calculate the Scaled Impact (SI) and results are shown in Table A2.

$$SI_{PEP} = GWP_{base} * TSF$$

As described in the EPD, calculations are made based on dataset describing electricity available on the low voltage level in Europe for year 2022 (source Ecoinvent 3.8 database). This value should be adjusted depending on specific project requirements. Please refer to this publication or contact Signify directly for more information.

Table A2 Scaled GWP per scaling factor (PEP EcoPassport aligned)

Flux [lm]	Power [W]	Efficacy [lm/W]	Total Scaling Factor (TSF) *				Scaled Impacts (GWP100 B6 - kg CO2eq.)			
			NC	DD	PS	DD+PS	NC	DD	PS	DD+PS
2500	11.9	210.1	0.140	0.105	0.105	0.077	121.9	91.5	91.5	67.1

* Note that if the product is non-dimmable, only the values for "NC (No Control)" are valid; if the driver type is PSU, only the values for "NC (No Control)" and "PS (presence sensing)" for are valid.