

Product Environmental Profile

WISER PLUG - FR






General information

| | |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Representative product | WISER PLUG - FR - CCTFR6500 |
| Description of the product | Enabling you to set schedules for home appliances from the Wiser Heat app, the Wiser Plug can be controlled from your phone or by using voice activation with the Google Assistant and Amazon Alexa. As well as being able to control your home appliances remotely, the Wiser Plug also has a builtin range extender to enable connectivity to devices further away from the Heat HubR. |
| Functional unit | Establish, support and interrupt for 20 years rated currents in normal conditions of circuit characterized by the current 0.5A, including any conditions specified for overload in operation characterized by the current 13A, for the operating voltage 230V and a current for shortcircuit 16A for a specified time. |



Constituent materials

| | | |
|-------------------------------|-------|------------------------------------------------------------------------------|
| Reference product mass | 152 g | including the product, its packaging and additional elements and accessories |
|-------------------------------|-------|------------------------------------------------------------------------------|

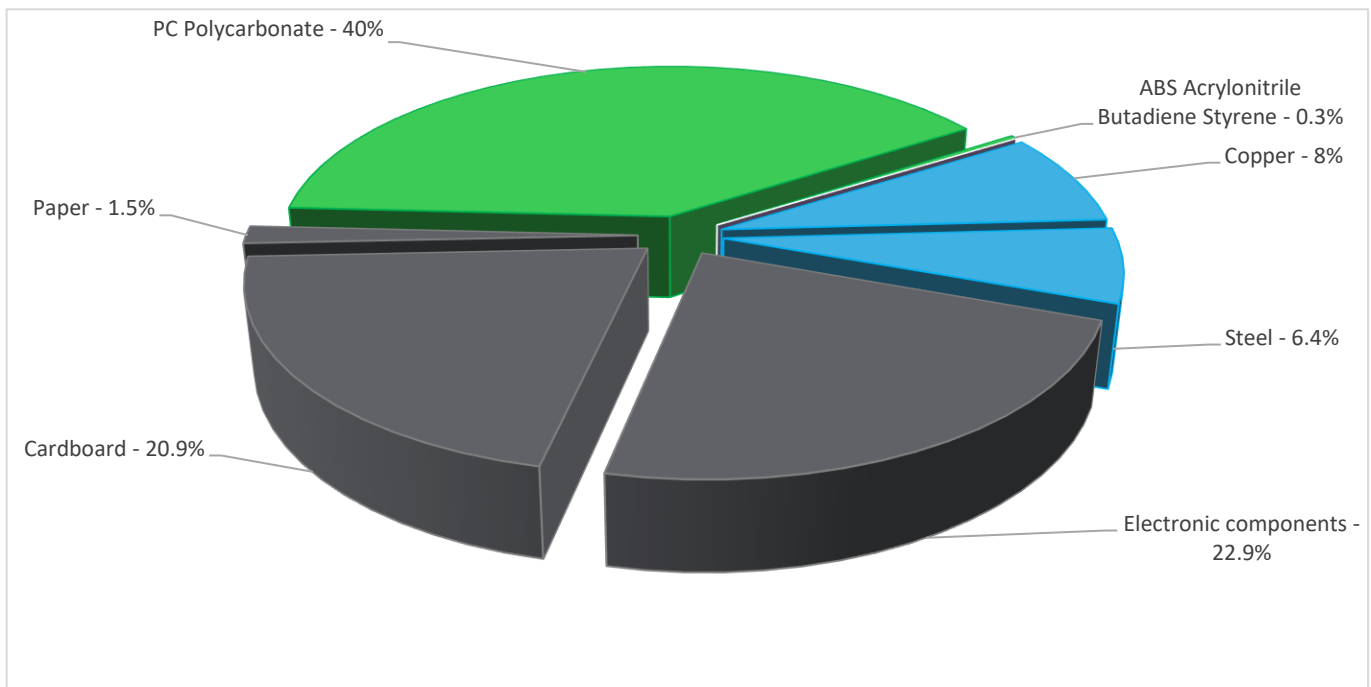

| | | |
|--|----------|-------|
| | Plastics | 40.3% |
| | Metals | 14.4% |
| | Others | 45.3% |

Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

Additional environmental information


The WISER PLUG - FR presents the following relevant environmental aspects

| | |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Design | Indicate all the eco-design improvements brought to the product at the design phase compared to previous offer range, refer to ecoDesign Way results |
| Manufacturing | Manufactured at a production site complying with the regulations |
| Distribution | Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 33.7 g, consisting of Cardboard (93.36%) Paper (6.64%) Product distribution optimised by setting up local distribution centres |
| Installation | Ref CCTFR6500 does not require any installation operations. The disposal of the packaging materials is accounted for during the installation phase (including transport to disposal) |
| Use | The product does not require special maintenance operations. |
| End of life | End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains Electronic Cards (26.145g + 1.2026g + 1.580272g + 1.223g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 72% Based on “ECO'DEEEE recyclability and recoverability calculation method” (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME). |

Environmental impacts

| | | | | |
|----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------|------------------------------------------------------------------|
| Reference life time | 20 years | | | |
| Product category | Switches | | | |
| Installation elements | Ref CCTFR6500 does not require any installation operations. The disposal of the packaging materials is accounted for during the installation phase (including transport to disposal) | | | |
| Use scenario | Load rate: 50% of In Use time rate: 30% of RLT | | | |
| Geographical representativeness | Europe | | | |
| Technological representativeness | The Modules of Technologies such as material production, manufacturing process and transport technology used in this PEP analysis (LCA-EIME in this case) are Similar and representative of the actual type of technologies used to make the product in production. | | | |
| Energy model used | Manufacturing | Installation | Use | End of life |
| | China model used: Electricity mix; AC; consumption mix, at consumer; 220V; CN | Electricity grid mix; AC; consumption mix, at consumer; 230V; AT | Electricity grid mix; AC; consumption mix, at consumer; 230V; AT | Electricity grid mix; AC; consumption mix, at consumer; 230V; AT |

| Compulsory indicators | | WISER PLUG - FR - CCTFR6500 | | | | | |
|--------------------------------------------------|-------------------------------------|-----------------------------|---------------|--------------|--------------|----------|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to mineral resources depletion | kg Sb eq | 1.50E-03 | 1.50E-03 | 0* | 0* | 1.12E-06 | 0* |
| Contribution to the soil and water acidification | kg SO ₂ eq | 6.33E-02 | 9.47E-03 | 8.95E-05 | 7.60E-06 | 5.37E-02 | 4.78E-05 |
| Contribution to water eutrophication | kg PO ₄ ³⁻ eq | 5.13E-03 | 1.85E-03 | 2.06E-05 | 1.85E-06 | 3.24E-03 | 1.99E-05 |
| Contribution to global warming | kg CO ₂ eq | 1.51E+01 | 2.18E+00 | 1.96E-02 | 1.82E-03 | 1.29E+01 | 5.64E-02 |
| Contribution to ozone layer depletion | kg CFC11 eq | 1.05E-06 | 2.09E-07 | 0* | 0* | 8.39E-07 | 2.10E-09 |
| Contribution to photochemical oxidation | kg C ₂ H ₄ eq | 3.64E-03 | 6.78E-04 | 6.39E-06 | 5.68E-07 | 2.95E-03 | 4.33E-06 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Net use of freshwater | m3 | 4.69E+01 | 2.28E-01 | 0* | 0* | 4.67E+01 | 0* |
| Total Primary Energy | MJ | 2.87E+02 | 2.94E+01 | 2.77E-01 | 0* | 2.57E+02 | 2.16E-01 |

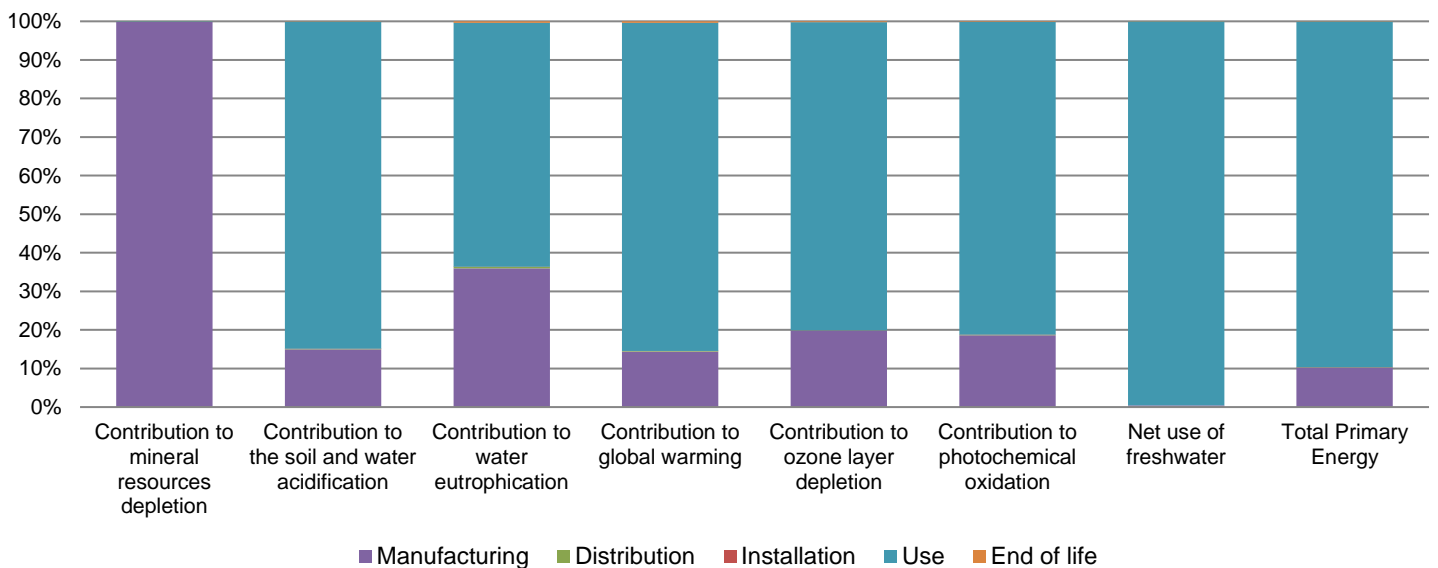

| Optional indicators | | WISER PLUG - FR - CCTFR6500 | | | | | |
|-------------------------------------------------------------------------------------------------|----------------|-----------------------------|---------------|--------------|--------------|----------|-------------|
| Impact indicators | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Contribution to fossil resources depletion | MJ | 1.68E+02 | 2.11E+01 | 2.76E-01 | 2.37E-02 | 1.46E+02 | 1.76E-01 |
| Contribution to air pollution | m ³ | 8.04E+02 | 2.48E+02 | 8.34E-01 | 0* | 5.54E+02 | 1.54E+00 |
| Contribution to water pollution | m ³ | 1.09E+03 | 5.54E+02 | 3.23E+00 | 2.77E-01 | 5.31E+02 | 2.78E+00 |
| Resources use | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Use of secondary material | kg | 4.80E-02 | 4.80E-02 | 0* | 0* | 0* | 0* |
| Total use of renewable primary energy resources | MJ | 3.46E+01 | 1.90E+00 | 0* | 0* | 3.27E+01 | 0* |
| Total use of non-renewable primary energy resources | MJ | 2.52E+02 | 2.75E+01 | 2.77E-01 | 0* | 2.24E+02 | 2.16E-01 |
| Use of renewable primary energy excluding renewable primary energy used as raw material | MJ | 3.44E+01 | 1.74E+00 | 0* | 0* | 3.27E+01 | 0* |
| Use of renewable primary energy resources used as raw material | MJ | 1.62E-01 | 1.62E-01 | 0* | 0* | 0* | 0* |
| Use of non renewable primary energy excluding non renewable primary energy used as raw material | MJ | 2.50E+02 | 2.52E+01 | 2.77E-01 | 0* | 2.24E+02 | 2.16E-01 |
| Use of non renewable primary energy resources used as raw material | MJ | 2.30E+00 | 2.30E+00 | 0* | 0* | 0* | 0* |
| Use of non renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Use of renewable secondary fuels | MJ | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Waste categories | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Hazardous waste disposed | kg | 1.84E+01 | 1.82E+01 | 0* | 0* | 6.71E-03 | 1.81E-01 |
| Non hazardous waste disposed | kg | 4.85E+01 | 4.84E-01 | 0* | 0* | 4.80E+01 | 0* |
| Radioactive waste disposed | kg | 3.24E-02 | 3.08E-04 | 0* | 0* | 3.21E-02 | 0* |
| Other environmental information | Unit | Total | Manufacturing | Distribution | Installation | Use | End of Life |
| Materials for recycling | kg | 1.29E-01 | 1.16E-02 | 0* | 3.35E-02 | 0* | 8.41E-02 |
| Components for reuse | kg | 0.00E+00 | 0* | 0* | 0* | 0* | 0* |
| Materials for energy recovery | kg | 1.40E-02 | 0* | 0* | 0* | 0* | 1.40E-02 |
| Exported Energy | MJ | 1.07E-04 | 1.00E-05 | 0* | 9.66E-05 | 0* | 0* |

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2016-11 in compliance with ISO14044.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

| | | | |
|---------------------------|----------------------|-------------------------------------|----------------------------------------------------------------------|
| Registration number : | SCHN-00748-V01.01-EN | Drafting rules | PCR-ed3-EN-2015 04 02 |
| Verifier accreditation N° | VH38 | Supplemented by | PSR-0005-ed2-EN-2016 03 29 |
| Date of issue | 03/22 | Information and reference documents | www.pep-ecopassport.org |
| | | Validity period | 5 years |

Independent verification of the declaration and data, in compliance with ISO 14025 : 2010

Internal External

The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)

PEP are compliant with XP C08-100-1 :2016

The elements of the present PEP cannot be compared with elements from another program.

Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »



Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

www.schneider-electric.com

SCHN-00748-V01.01-EN

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

03/22