



Reversing  
contactor  
BFA012

Product designation

Product type designation

**Electrical features**

Maximum operating current ( $\leq 440V$ ) A 12

**Contact characteristics**

Operational current Ie AC-3 ( $\leq 440V \leq 55^{\circ}C$ ) A 12

Rated operational power AC-3 ( $T \leq 55^{\circ}C$ )

230V	kW	3.2
400V	kW	5.7
415V	kW	6.2
440V	kW	6.2
500V	kW	7.5
690V	kW	10

Built-in auxiliary contacts

NO	0
NC	1

**UL technical data**

Maximum UL/CSA horsepower ratings single-phase

110V-120V	HP	1
220V-240V	HP	2

Maximum UL/CSA horsepower ratings three-phase, 3-pole


200V-208V	HP	5
220V-240V	HP	5
440V-480V	HP	7.5
550V-600V	HP	10

**Mechanical features**


Terminals type Clamp screw

Weight g 760

**Dimensions**

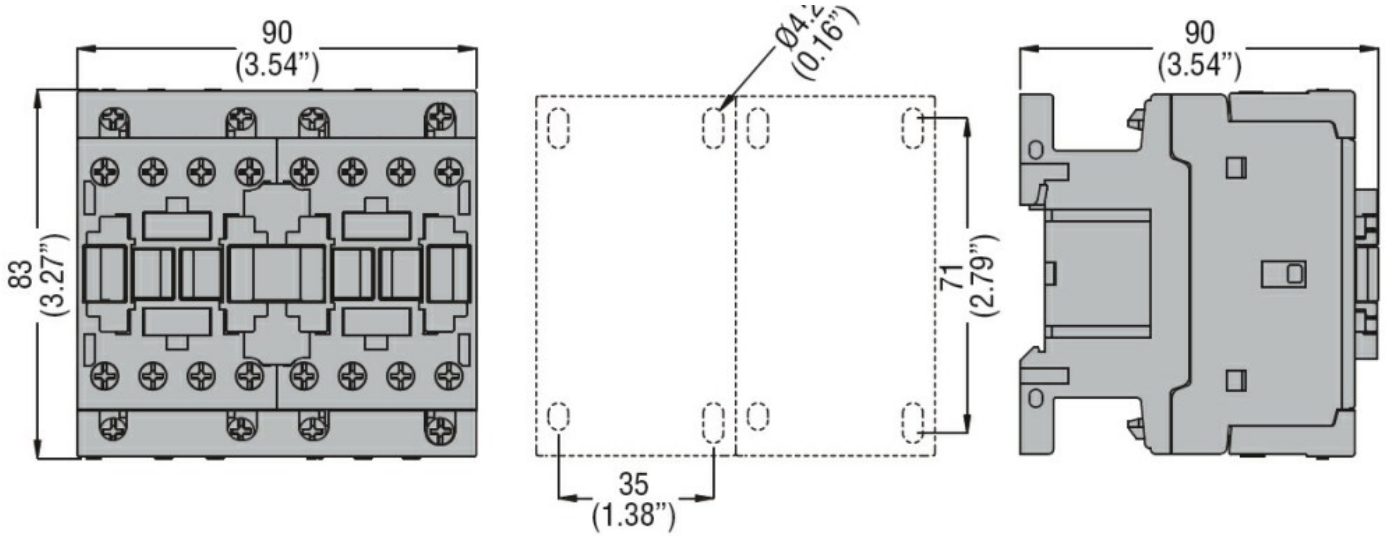

**Wiring diagrams**

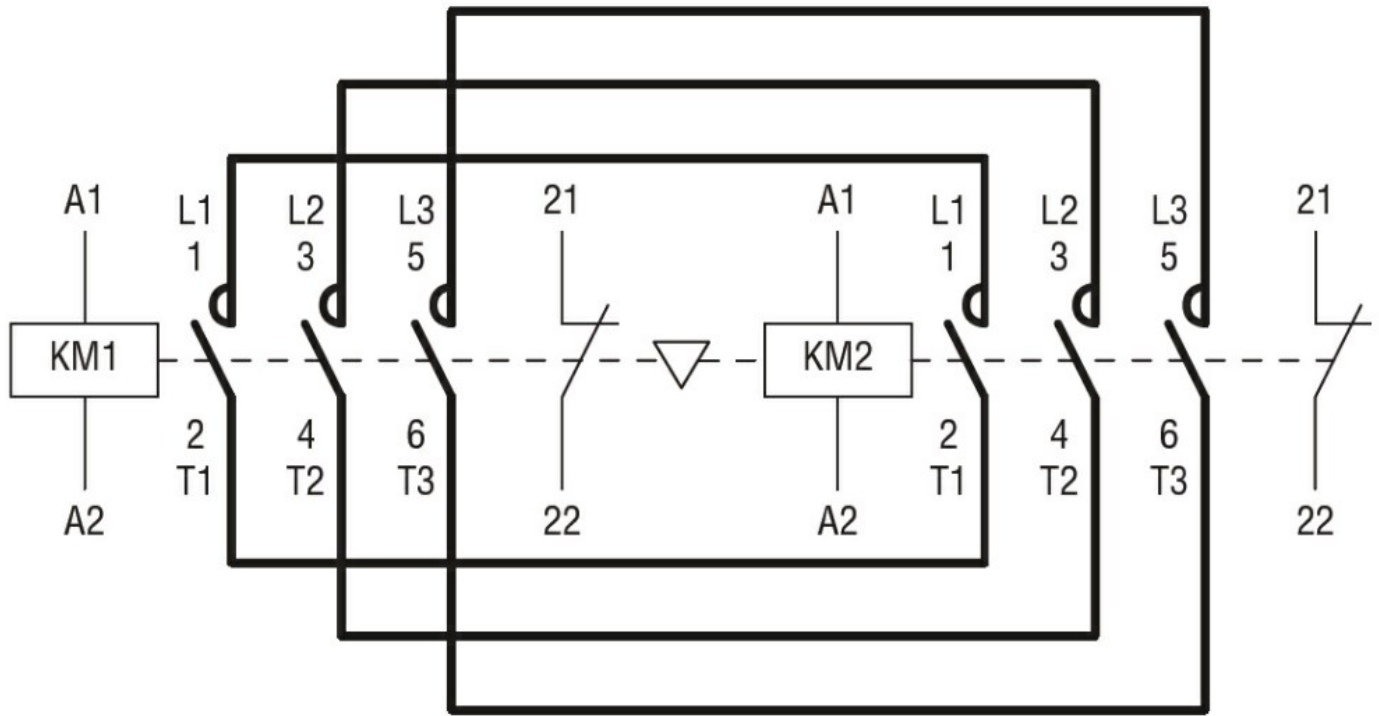

**Certifications and compliance**

**Compliance**

IEC/EN 60947-1  
IEC/EN 60947-4-1  
UL508 CSA C22.2 n° 14

**Certificates**

cULus

**ETIM classification**

ETIM 8.0

EC001037 -  
Motor  
starter/Motor  
starter  
combination