



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
P44G14M-XYZ	SEE SHEET 2

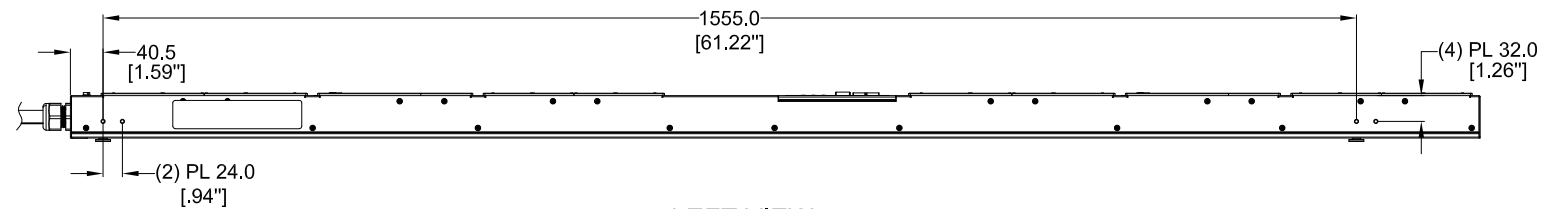


LEFT VIEW

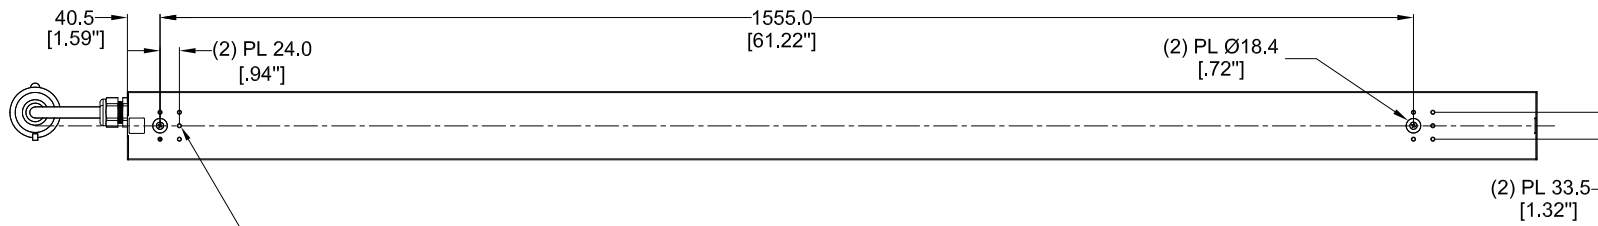


REAR VIEW

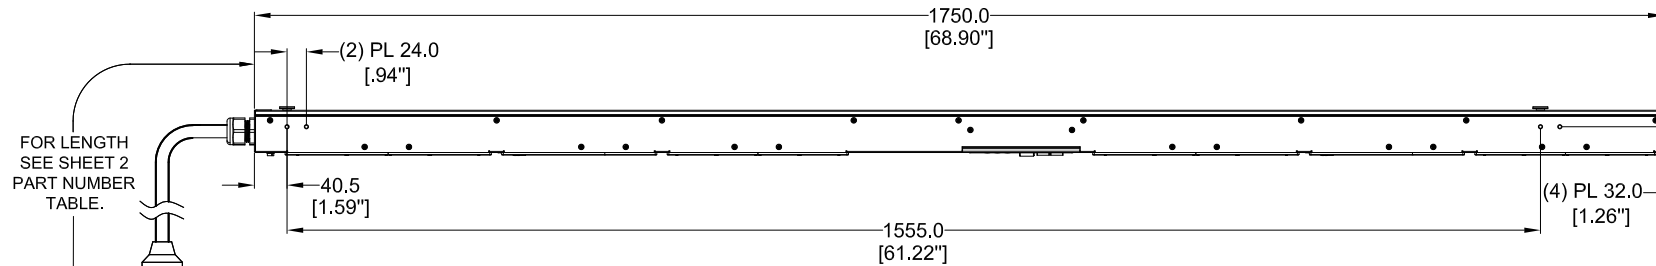

RIGHT VIEW

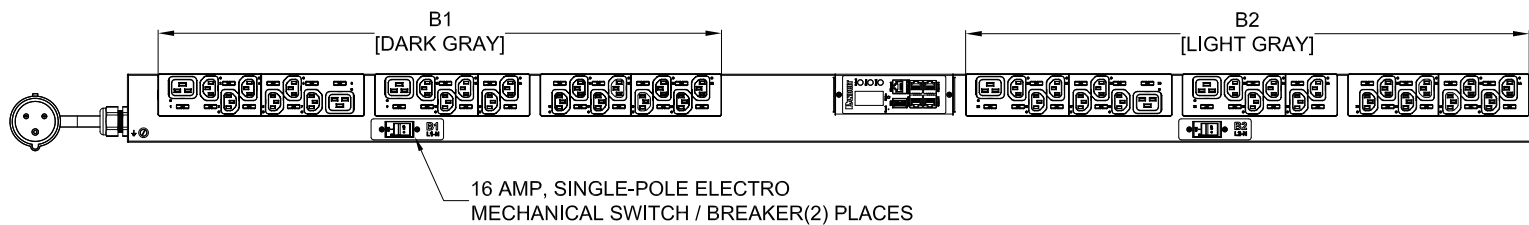

FRONT VIEW



BOTTOM VIEW

SPECIFICATION:


- STANDARD:
 - UNIT TYPE: MONITORED & SWITCHED PER OUTLET
 - ORIENTATION: VERTICAL, 0U FULL, WIDE
 - OUTLET QTY & TYPE: (38) C13, (6) C19
 - INPUT VOLTAGE: 200-240VAC
 - INPUT CURRENT: 32A
 - BREAKER QTY & TYPE: (2) 16AMP, SINGLE-POLE
 - INPUT PHASE: SINGLE-PHASE
 - RATED POWER: 7.4kVA
 - INPUT PLUG: IEC 60309 2P+E 6H 32A
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL: NONE
- ACCESSORIES: (1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P44G14M-XX Y Z

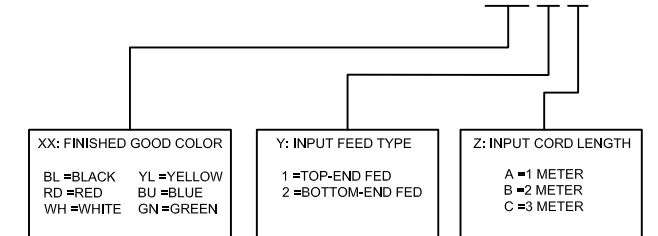

PLUG/RECEPTACLE BLOCK

PLUG
IEC 60309, 2P 3W, 6H
IP44 (SPASHPROOF)
32A, 200 - 250V MAX RATED INPUT

SIX (6)
RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

THIRTY-EIGHT (38)
RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	06/07/2018	JF.YU	MIM	JAWI	ADDED 'BOTTOM-END FED' CONFIGURABLE PART NUMBER TO SHEET 2 TABLE AND DESCRIPTION. UPDATED IDENTIFICATION TO INCLUDE 'BOTTOM-END FED' IN CONFIGURABLE OPTION DE-CODER. UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P44G14M
02A	02/24/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION. UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P44G14M
01A	09/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P44G14M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____
DATE _____
PRINT _____

TITLE: INTELLIGENT SERIES PDU
P44G14M-XYZ
CUSTOMER DRAWING

ITEM REVISION NAME: _____
DATASHEET FILE NAME: _____

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

MATERIAL/COLOR: N/A

DRAWING NUMBER: P44G14M_DC

DRAWN BY: GEORGE | DATE: 09/11/2017 | CHK: SEAN | SCALE: NONE

SHT 1 OF 2 | SCALE: B

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P44G14M	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-BL1A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-BL1B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-RD1A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-RD1B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-RD1C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-WH1A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-WH1B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-WH1C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-YL1A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-YL1B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-YL1C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-BU1A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-BU1B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-BU1C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-GN1A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-GN1B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-GN1C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-BL2A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-BL2B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-BL2C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-RD2A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-RD2B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-RD2C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-WH2A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-WH2B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-WH2C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-YL2A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-YL2B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-YL2C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-BU2A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-BU2B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-BU2C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg
P44G14M-GN2A	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+7"-3.5"]	8.3kg
P44G14M-GN2B	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"-3.5"]	8.6kg
P44G14M-GN2C	VERTICAL,(38) C13,(6) C19,MONITORED & SWITCHED PER OUTLET,200-240V/32A/1 PHASE, BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"-5"]	8.9kg

B

B

A

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	06/07/2018	JF.YU	MIM	JAWI	ADDED 'BOTTOM-END FED' CONFIGURABLE PART NUMBER TO SHEET 2 TABLE AND DESCRIPTION. UPDATED IDENTIFICATION TO INCLUDE 'BOTTOM-END FED' IN CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P44G14M
02A	02/24/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P44G14M
01A	09/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P44G14M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX.
THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____
DATE _____
PRINT _____

TITLE: INTELLIGENT SERIES PDU
P44G14M-XYZ
CUSTOMER DRAWING

ITEM REVISION NAME: _____
DATASHEET FILE NAME: _____

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
0<L<50 ±0.5
50<L<250 ±1.0
250<L<500 ±1.5
500<L<1000 ±2.5
1000<L<2000 ±4.0

MATERIAL/COLOR: N/A

DRAWING NUMBER: P44G14M_DC

THIRD ANGLE PROJECTION

DRAWN BY: GEORGE | DATE: 09/11/2017 | CHK: SEAN | SCALE: NONE

SHT 2 OF 2 | SCALE: B