

Lightbar MX250-CB



ECE certified - ECE R7R112

The necessary tests and approvals were carried out and an ECE type approval was granted2)



Combo Beam

Designed for both: far-field and near-field illumination. For widespread illumination in the near field and spot illumination in the far field.



Light beam up to 320 m length

See and be seen with OSRAM



on-road & off-road

Versatile applicable and flexible in use. On-road & off-road, in terrain, at work and in the spare time.



Bringing light to life with OSRAM LEDriving driving and working lights

Considerable foresight on dark country roads, forest paths, off the beaten tracks, off-road and on-road- this can be achieved with the OSRAM LEDriving Lightbar MX250-CB. With its 26 powerful, high-performance long-life LEDs, the OSRAM LEDriving Lightbar MX250-CB has a range of up to 320 meters and thus offers the driver impressive foresight on-road and off-road. Even in dim light and reduced visibility due to external environmental influences, the OSRAM LEDriving Lightbar MX250-CB with up to 6000 Kelvin can provide conditions similar to daylight. The power package with up to 2700 lumens of luminosity scores with highest optical efficiency and homogeneous light distribution. This results in the possibility of an improved view for you and the improved visibility of your vehicle by other road users, and consequently also increased safety on-road and off-road. Whether on-road or off-road - OSRAM LEDriving Lightbar MX250-CB impresses with its powerful performance and a long service life with up to 5000 hours. Versatile applicable, it defies numerous environmental influences and, thanks to high-quality materials such as the aluminum housing and the stable polycarbonate lens, it is particularly light and at the same time robust and resistant. OSRAM LEDriving Lightbar MX250-CB has been tested and validated with the IP-Protection Class IP69K in our DIN certified environmental simulation laboratory for extreme external influences regarding water, dust, impacts, heat, cold and permanent vibration. The integrated driver and the thermal management system regulate the temperature of the LED Lightbar and can thus prevent damage from overheating. The polarity protection inhibits the wrong polarity of the voltage supply and can thus prevent possible damage by automatically switching off the LEDs. On-road and off-road, the OSRAM LEDriving Lightbar MX250-CB is an effective and efficient addition to your vehicle. No registration or entry in the vehicle documents is necessary for these ECE-certified LED driving light²). ECE reference number: 30The OSRAM LEDriving Lightbar MX250-CB can be attached to cars, trucks, agricultural machinery, farm machinery, commercial vehicles, construction vehicles, caravans, off-road vehicles and quads²). The OSRAM LEDriving Lightbar MX250-CB is versatile applicable and flexible in use.²) OSRAM LEDriving Driving Lights are approved according to ECE regulations and may therefore be installed and operated on public roads. Please note: Special installation regulations apply. In addition to ECE approval of the product, individual special requirements and legislation of the countries must be observed.

Product datasheet

Technical data

Product information

Order reference	LEDDL110-CB
Application (Category and Product specific)	Additional high beam and position light

Electrical data

Nominal voltage	12/24 V
Nominal wattage	45.00 W
Test voltage	13.5 V


Photometrical data

Luminous flux	2700 lm
Color temperature	6000 K
Light distance at 1lx	320 m

LED module information

Number of LEDs per module	10/26
---------------------------	-------

Dimensions & weight




Product weight	2000.00 g
Length	356 mm
Width	86 mm
Height	54 mm

Lifespan

Lifespan Tc	5000 h
Guarantee	5 years

Additional product data

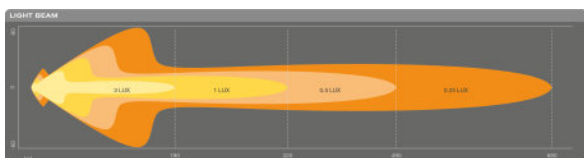

Luminous intensity distribution

Connector to lamp	Open wire
Product remark	Beam Pattern: Combo

Capabilities

Technology	LED ¹⁾
------------	-------------------

¹⁾ Light-emitting diode application

Certificates & standards

Standards	ECE R10, R112, R7
Approval marks – approval	E4 approval
Type of protection	IP69K

Country specific categorizations

Order reference	LEDDL110-CB
-----------------	-------------

Logistical data

Commodity code	851220009000
----------------	--------------







Logistical Data

Product datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4062172153959	Lightbar MX250-CB	Folding carton box 1	283 mm x 137 mm x 89 mm	3.45 dm ³	2186.00 g
4062172153966	Lightbar MX250-CB	Shipping carton box 4	415 mm x 344 mm x 291 mm	41.54 dm ³	10250.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File
 Movie application OSRAM Quality Testing LEDriving working and driving lights (EN)
 Movie application OSRAM LEDdriving and working lights Imagefilm (EN)
 Movie application LEDriving D&W Image Video Bringing light to life (EN)
 Movie application LEDriving Driving & Working Lights Reference Video (EN)
 Movie application OSRAM LEDriving driving and working lights FX1000-CB SM (EN)
 360 Degree Image LEDriving Lightbar MX250-CB LEDDL110-CB

Legal advice:

The installation of the LEDriving Lightbar MX250-CB is fully ECE compliant and therefore registration free. This does not include individual custom requirements of countries, in addition to the standardized ECE certification of the product.

1) Precise terms and conditions at: www.osram.com/am-guarantee

2) OSRAM LEDriving Driving Lights are approved according to ECE regulations and may therefore be installed and operated on public roads. Please note: Special installation regulations apply. In addition to ECE approval of the product, individual special requirements and legislation of the countries must be observed.

Refer to www.osram.com/am-guarantee for precise conditions

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

