



Product designation	Shunt trip releases		
Product type designation	SM1X		
Description	Shunt trip releases		
Accessories for	SM1P..., SM1R...		
Auxiliary contact characteristics			
Rated insulation voltage U_i IEC/EN	V	690	
Rated impulse withstand voltage U_{imp}	kV	4	
Operational characteristics			
Rated supply voltage AC	VAC	110	
Rated frequency	Hz	50	
In-rush consumption	VA	20	
Operating voltage	US	70...110	
Mechanical features			
Tightening torque for terminals	min	Nm	1
	max	Nm	1
	min	lbin	9
	max	lbin	9
Conductor section	AWG/Kcmil		
	min	18	
	max	14	
	Flexible w/o lug conductor section		
	min	mm ²	0.75
	max	mm ²	2.5
	Flexible c/w lug conductor section		
	min	mm ²	0.75
	max	mm ²	2.5
Operating position	normal allowable	Vertical Any	
Terminals	type screw width tool	mm	Screw M3.5 7.2 Ph2
Weight		g	140
Operations			
Mechanical life		cycles	100000
Ambient conditions			
Temperature	Operating temperature		
	min	°C	-20
	max	°C	+60

Storage temperature

min	°C	-50
max	°C	+80


Max altitude

m 3000


IEC degree of protection

IP20

Dimensions

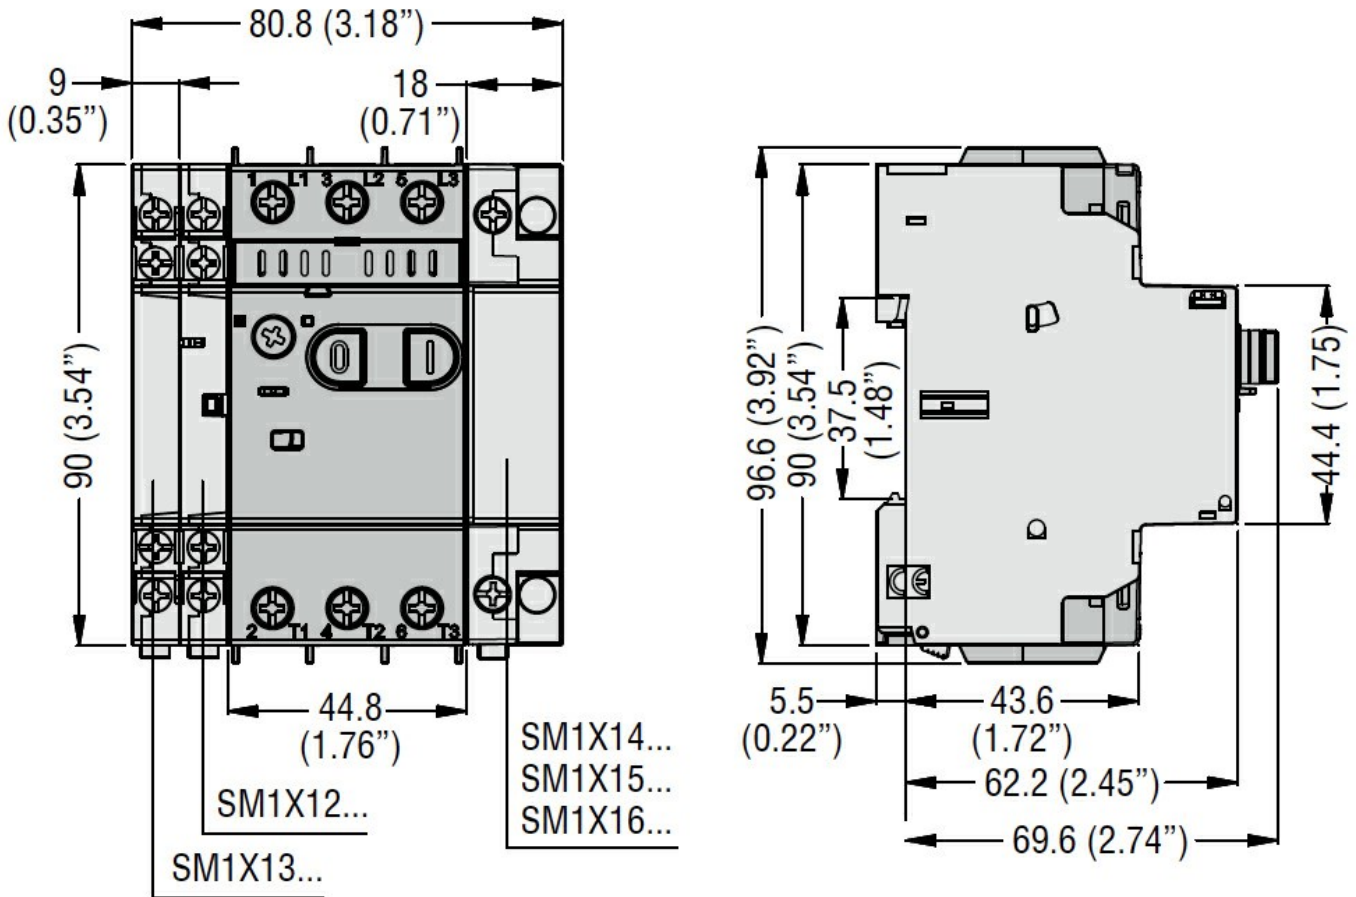

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

cULus

EAC

ETIM classification

□