



Contact elements, base mount on LPZ control station LPXCB

Product designation

Product type designation

**Electrical characteristics**

Rated insulation voltage $U_i$ IEC/EN	V	690
IEC Conventional free air thermal current $I_{th}$	A	10
Conductivity		1mA 5V
UL/CSA and IEC/EN 60947-5-1 designation		A600 Q600
Operating current AC15		
	12V	A 6
	24V	A 6
	48V	A 6
	120V	A 6
	240V	A 3
	400V	A 1.9
	480V	A 1.5
	500V	A 1.4
	600V	A 1.2

Operating current DC13

	12V	A 3
	24V	A 3
	48V	A 1.5
	125V	A 0.55
	250V	A 0.27
	440V	A 0.15
	500V	A 0.13
	600V	A 0.1

Contact resistance	mΩ	≤20
--------------------	----	-----

**Operations**

Electrical life	cycles	1000000
-----------------	--------	---------

**Mechanical features**

Operating force	kg-lb	≤0.5kg/1.1lb
-----------------	-------	--------------

Tightening torque for terminals max	Nm	1
-------------------------------------	----	---

Terminals screw		Clamp screw and washer
-----------------	--	------------------------

Conductor section			
	AWG/kcmil conductor section		
		max	14

	IEC		
		max	mm <sup>2</sup> 1 or 2 / 2.5

Mounting adapter		LPXAU120
------------------	--	----------

Weight	g	12
--------	---	----

**Ambient conditions**

Temperature

Operating temperature


min	°C	-25
max	°C	+70

Storage temperature


min	°C	-40
max	°C	+85

## Dimensions

Mounting position on the LPZ control station base

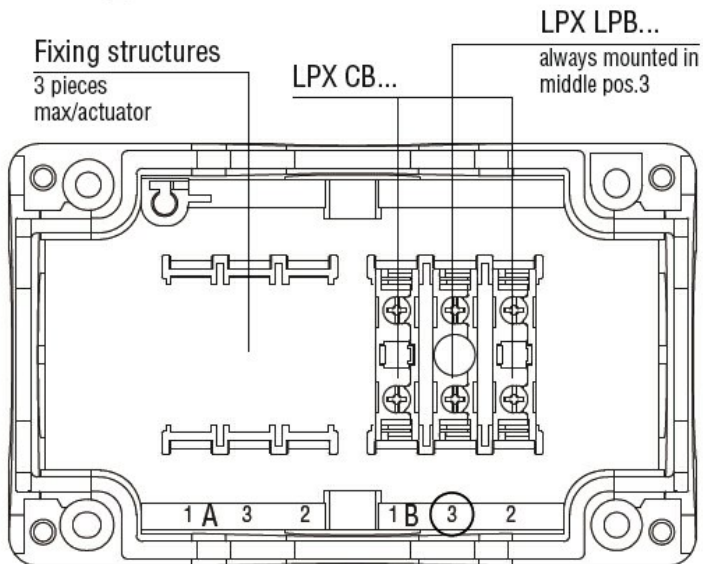

## Wiring diagrams

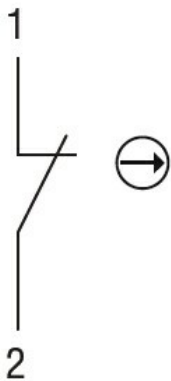

## Certifications and compliance

Compliance

CSA C22.2 n° 14  
IEC/EN/BS 60947-1  
IEC/EN/BS 60947-5-1  
UL508

Certificates

CCC  
cULus  
EAC  
RINA  
UL

## ETIM classification

ETIM 8.0

EC000041 -  
Auxiliary contact  
block