1SET313169R0000 ACTIVE

ENTRELEC | M12 Connector

TE Internal #: 1SET313169R0000

M12 Cable Assembly, 4 Position, 1 m, Sensor/Actuator, Code A,

M12 Plug, M12 Socket, Double Ended, GF Nylon

View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies



M8/M12 Application Type: Sensor/Actuator

Number of Positions: 4

Keying Code: A

Connector Type (End A): M12 Plug

Connector Type (End B): M12 Socket

Features

Product Type Features

LED	Without
Product Type	Cable Assembly
Cable Type	PUR
Assembly Type	Pigtail
Connector Type (End A)	M12 Plug
Connector Type (End B)	M12 Socket
Cable Assembly Type	M12
Configuration Features	
Number of Positions	4
Keying Code	A
Electrical Characteristics	
Operating Voltage	250 VDC
Body Features	
Cable Exit Angle	Straight



Environmental Protection	With
Conductor Material	Copper Alloy
Connector Color	Blue
Wire Color	Brown, White, Blue, Black
Cable Jacket Color	Gray
Insulation Material	PVC
Contact Features	

Contact Current Rating 4 A	
----------------------------	--

Mechanical Attachment

Screw & Hole Thread Size	M12 x M12
Connector Orientation (End A)	Straight
Connector Orientation (End B)	Straight

Housing Features

Housing Material	GF Nylon
Trodomig Waterian	Si rijion

Dimensions

Overall Outside Cable Diameter	5 mm
Wire Size	.34 mm²

Operation/Application

M8/M12 Application Type	Sensor/Actuator
Shielded	No

Other

Field Serviceable	Yes
Cable Assembly Length	1 m
Cable Assembly Configuration	Double Ended

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Not Yet Reviewed



Not reviewed for solder process capability

Halogen Content	Not Low Halogen - contains Br or Cl > 900
	ppm.

Product Compliance Disclaimer


Solder Process Capability

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series M12 Connector

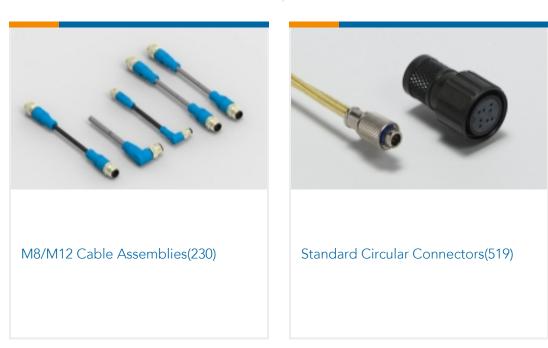

Documents

Product Drawings
M12-MS-4P-M12-FS-PUR-1.0

English

CAD Files

3D PDF

3D



Customer View Model

ENG_CVM_CVM_1SET313169R0000_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1SET313169R0000_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1SET313169R0000_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Catalog - ENTRELEC-M8-M12-RJ45

English

Product Specifications

Application Specification

English