
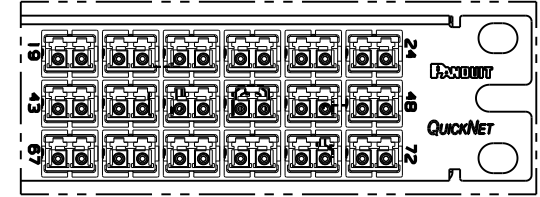
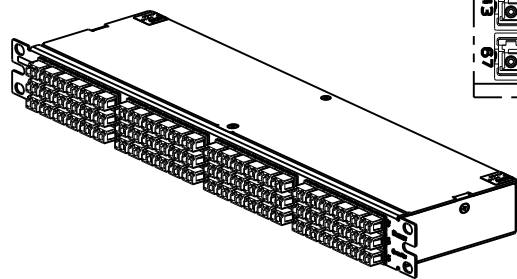


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FIBER TYPE	PANDUIT PART NUMBER	DESCRIPTION
SINGLEMODE OS1/OS2	FIRS9N-1A12-10S	QUICKNET HIGH DENSITY CASSETTE STANDARD FIBER STRAIGHT THROUGH
	FIRS9N-1A12-10F	QUICKNET HIGH DENSITY CASSETTE STANDARD FIBER - FLIPPED PAIR
MULTIMODE OM3/OM4	FIRSXN-1A12-10S	QUICKNET HIGH DENSITY CASSETTE OM3 STANDARD FIBER STRAIGHT THROUGH
	FIRSXN-1A12-10F	QUICKNET HIGH DENSITY CASSETTE OM3 STANDARD FIBER - FLIPPED PAIR
	FIRSXO-1A12-10S	QUICKNET HIGH DENSITY CASSETTE OM3 OPTIMIZED FIBER STRAIGHT THROUGH
	FIRSXO-1A12-10F	QUICKNET HIGH DENSITY CASSETTE OM3 OPTIMIZED FIBER - FLIPPED PAIR
	FIRSZN-1A12-10S	QUICKNET HIGH DENSITY CASSETTE OM4 STANDARD FIBER STRAIGHT THROUGH
	FIRSZN-1A12-10F	QUICKNET HIGH DENSITY CASSETTE OM4 STANDARD FIBER - FLIPPED PAIR
	FIRSZO-1A12-10S	QUICKNET HIGH DENSITY CASSETTE OM4 OPTIMIZED FIBER STRAIGHT THROUGH
FIRSZO-1A12-10F	QUICKNET HIGH DENSITY CASSETTE OM4 OPTIMIZED FIBER - FLIPPED PAIR	

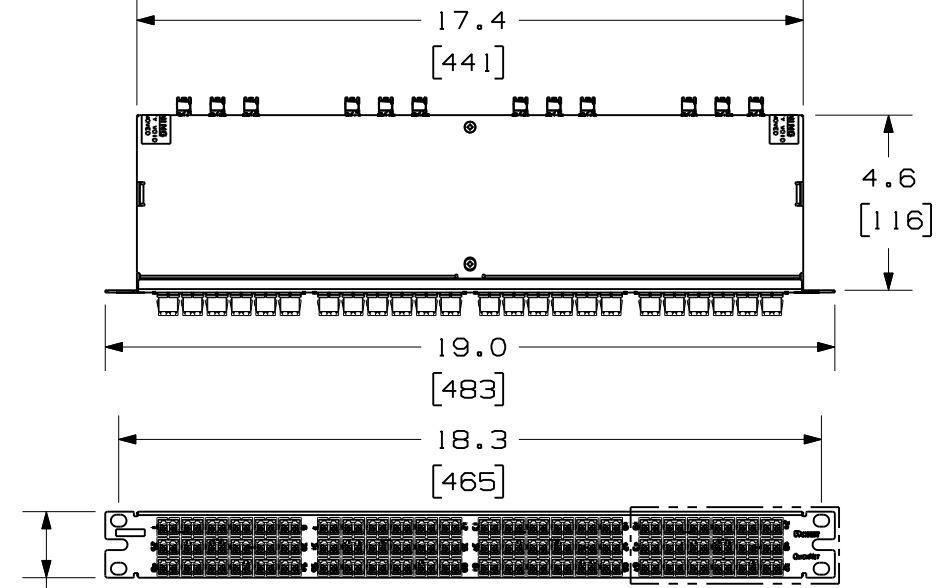

NOTES:

- SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITIES.
- SEE CATALOG FOR A COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- EXCEPT FOR THE PART NUMBERS ENDING IN "F", THE HDQ CASSETTES LISTED ON THIS PRINT FOLLOW TYPE A ARRAY AS CITED IN TIA-568-C.3
- PART NUMBERS ENDING IN "F" INDICATE FLIPPED PAIRS. THE "F" OPTION REPLACES THE NEED FOR AN A-A PATCH CORD, ONLY REQUIRING TWO A-B PATCH CORDS IN THE METHOD A SYSTEM. REFERENCE TIA-568-C.0 FOR DETAILS ON METHOD A CONNECTIVITY.
- MATERIALS:
A. CASSETTE MATERIAL: ALUMINUM/STEEL
B. ADAPTER: COMPOSITE PLASTIC
- ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTIONS OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
- CASSETTE WEIGHT: 49.6oz (1406g)
- DIMENSIONS IN BRACKETS ARE METRIC

TITLE		1RU HDQ SERIES 144 FIBER CASSETTE 12 FIBER MPO TO LC WITH STANDARD LABELING TYPE A ARRAY FOR METHOD A CONNECTIVITY CUSTOMER DRAWING		
ITEM REVISION NAME		12F179AA/00.PRT		
DATASET FILE NAME		12F179AA_DC/00A.PRT		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL: SEE NOTES		
ALL DIMENSIONS ARE FOR REFERENCE ONLY		DRAWING NUMBER: 12F179AA-DC		
THIRD ANGLE PROJECTION		SHT 1 OF 1		
DRAWN BY	DATE	CHK	SCALE	SIZE
JESA	9/26/12	WJM	NONE	A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
R	9/26/12	JESA	WJM	CHDE	RELEASED TO PRODUCTION	12F179AA-DC