


# LL3-TK16

LL3

FIBERS

**SICK**  
Sensor Intelligence.



## Ordering information

Type	Part no.
LL3-TK16	5313038

Other models and accessories → [www.sick.com/LL3](http://www.sick.com/LL3)

## Detailed technical data

### Features

<b>Device type</b>	Fibers
<b>Functional principle</b>	Through-beam system
<b>Functional principle detail</b>	Consisting of a sender and a receiver
<b>For fiber-optic sensor</b>	GLL170(T), WLL180, WLL24 Ex, WLL80
<b>Fiber length</b>	2,000 mm
<b>Fiber material</b>	Polymethylmethacrylat (PMMA)
<b>Jacket material</b>	Polyethylen (PE)
<b>Fiber head material</b>	Stainless steel
<b>Outer diameter, fiber-optic cable connection</b>	2.2 mm
<b>Fiber-optic cable cuttable</b>	✓
<b>Fiber-optic head design</b>	90° deflection
<b>Fiber arrangement</b>	Monofiber
<b>Core structure</b>	Ø 1,0 mm Monofiber
<b>Angle of dispersion &lt; 60°</b>	Yes
<b>Compatibility with infrared light (1,450 nm)</b>	No
<b>Highly flexible/elastic fibers (bend radius 1–4 mm)</b>	No
<b>Adapter end sleeves required</b>	No
<b>Angle of dispersion</b>	10.85°
<b>Integrated lens</b>	Yes
<b>Minimal object diameter</b>	0.2 mm <sup>1)</sup>
<b>Included with delivery</b>	Mounting, 2 x terminal, FC fiber cutter (5304141), protective cladding for fiber head
<b>Compatibility tip adapters</b>	No
<b>Special features</b>	90° deflection integrated, maximum sensing range

<sup>1)</sup> Minimum detectable object was determined at optimum measuring distance and optimum setting.

### Mechanics/electronics

<b>Bend radius, fibre-optic cable</b>	25 mm
<b>Ambient operating temperature</b>	-40 °C ... +100 °C

### Classifications

<b>ECLASS 5.0</b>	27270905
-------------------	----------

<b>ECLASS 5.1.4</b>	27270905
<b>ECLASS 6.0</b>	27270905
<b>ECLASS 6.2</b>	27270905
<b>ECLASS 7.0</b>	27270905
<b>ECLASS 8.0</b>	27270905
<b>ECLASS 8.1</b>	27270905
<b>ECLASS 9.0</b>	27270905
<b>ECLASS 10.0</b>	27270905
<b>ECLASS 11.0</b>	27270905
<b>ECLASS 12.0</b>	27270905
<b>ETIM 5.0</b>	EC002651
<b>ETIM 6.0</b>	EC002651
<b>ETIM 7.0</b>	EC002651
<b>ETIM 8.0</b>	EC002651
<b>UNSPSC 16.0901</b>	39121528

Sensing ranges with WLL80

<b>Operating mode 16 <math>\mu</math>s</b>	320 mm
<b>Operating mode 70 <math>\mu</math>s</b>	1,005 mm
<b>Operating mode 250 <math>\mu</math>s</b>	1,595 mm
<b>Operating mode 500 <math>\mu</math>s</b>	2,090 mm
<b>Operating mode 1 ms</b>	2,350 mm
<b>Operating mode 2 ms</b>	3,055 mm
<b>Operating mode 8 ms</b>	3,600 mm

Sensing ranges with WLL180T

<b>Operating mode 16 <math>\mu</math>s</b>	180 mm
<b>Operating mode 70 <math>\mu</math>s</b>	600 mm
<b>Operating mode 250 <math>\mu</math>s</b>	1,100 mm
<b>Operating mode 2 ms</b>	2,500 mm
<b>Operating mode 8 ms</b>	3,300 mm
<b>Note</b>	Sensing ranges related to fiber-optic sensors with type of light: visible red light

Sensing ranges with GLL170


<b>Operating mode 250 <math>\mu</math>s</b>	590 mm
---	--------

Sensing ranges with GLL170T

<b>Operating mode 50 <math>\mu</math>s</b>	530 mm
<b>Operating mode 250 <math>\mu</math>s</b>	790 mm

### Dimensional drawing (Dimensions in mm (inch))

LL3-TK16

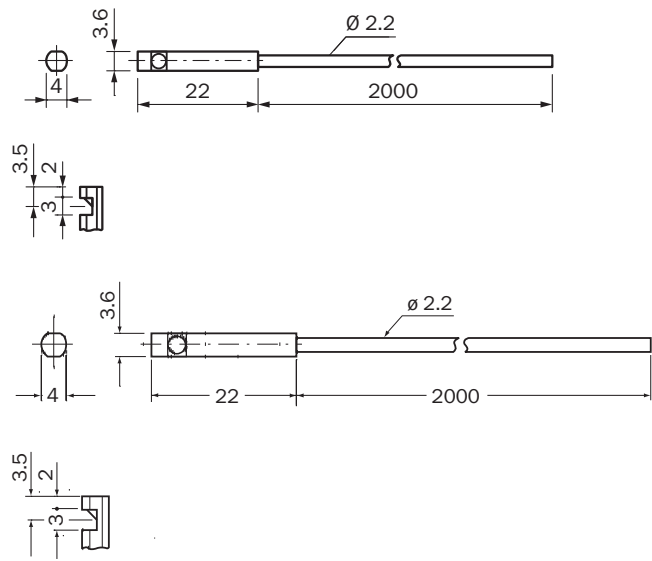

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)