# 1SET311613R0000 - ACTIVE

#### ENTRELEC | M8 Connector

TE Internal #: 1SET311613R0000

M8 to M12 Cable Assembly, 3 Position, 1 m, Sensor/Actuator, Code

A, M8 Plug, M12 Socket, Double Ended, GF Nylon

View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies











M8/M12 Application Type: Sensor/Actuator

Number of Positions: 3

Keying Code: A

Connector Type (End A): M8 Plug
Connector Type (End B): M12 Socket

### **Features**

### Product Type Features

LED	Without
Product Type	Cable Assembly
Cable Type	PUR
Assembly Type	Pigtail
Connector Type (End A)	M8 Plug
Connector Type (End B)	M12 Socket
Cable Assembly Type	M8 to M12
Configuration Features	
Number of Positions	3
Keying Code	A
Electrical Characteristics	
Operating Voltage	60 VDC
Body Features	
Environmental Protection	With



Conductor Material	Copper Alloy
Connector Color	Blue
Wire Color	Brown, Blue, Black
Cable Jacket Color	Gray
Insulation Material	PUR
Contact Features	
Contact Current Rating	3 A
Mechanical Attachment	
Screw & Hole Thread Size	M8 x M12
Connector Orientation (End A)	Straight
Connector Orientation (End B)	Right Angle
Housing Features	
Housing Material	GF Nylon
Dimensions	
Overall Outside Cable Diameter	4.5 mm
Wire Size	.25 mm <sup>2</sup>
Usage Conditions	
Operating Temperature Range	-25 – 85 °C[-13 – 185 °F]
Operation/Application	
M8/M12 Application Type	Sensor/Actuator
Shielded	No
Packaging Features	
Packaging Method	Box
Other	
Field Serviceable	Yes
Cable Assembly Length	1 m
Cable Assembly Configuration	Double Ended

## **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions



China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability


#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## Compatible Parts



## Also in the Series | M8 Connector

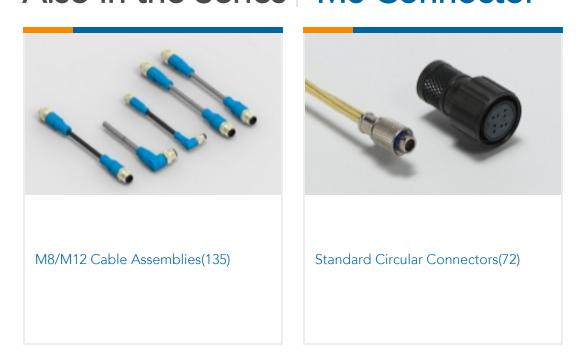

#### **Documents**

Product Drawings
M8-MS-3P-M12-FR-PUR-1.0



English

**CAD Files** 

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1SET311613R0000\_A.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SET311613R0000\_A.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1SET311613R0000\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

Infographic - entrelec ews-linecard

English

Catalog - ENTRELEC-M8-M12-RJ45

English

**Product Specifications** 

**Application Specification** 

English

**Application Specification** 

English