

# IES LM-79-08

## MEASUREMENT AND TEST REPORT

For

**Soraa, Inc**

6500 Kaiser Dr. Fremont, California 94555, USA

**Test Model: SP20-11-36D-830-03**

<b>Report Type:</b>	Electrical and Photometric tests including: Luminous Flux, Color, Luminous Intensity Distribution, Spatial Non-uniformity of Chromaticity
<b>Test Engineer:</b>	Daniel Duan <i>Daniel Duan</i>
<b>Report Number:</b>	R2DG151230059-10A1
<b>Test Date:</b>	2016-01-04 to 2016-01-14
<b>Report Date:</b>	2016-06-24
<b>Reviewed By:</b>	Jeanne Han/Safety Manager <i>Jeanne Han</i>
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008
<b>Test Facility:</b>	Test facility was located at Pu Long Cun 69, Puxinghu Industrial Area, Tangxia Town, Dongguan, Guangdong, P.R.China.

## 1. Product Description

### General Information:

One sample was received on 2015-12-30 and used for testing.

Model Tested: SP20-11-36D-830-03  
 Manufacturer: Soraa, Inc  
 Brand Name: SORAABRILLIANT  
 Product Designation: Directional LED Lamp  
 Burning Time Before Test: 0hour(For New Products)

### Rated Values:

Rated Voltage/Frequency: 100-120V 50/60H  
 Rated Power: 10.8W  
 Nominal CCT: 3000K  
 Nominal Lumen Output: 690 lm

## 2. Standards Used

- IESNA LM-79-08: Approved Method: Electrical & Photometric Measurement of Solid-state Lighting Products
- ANSI C82.77-2002: Harmonic Emission Limits – Related Power Quality Requirements for Lighting

## 3. Description of Test Equipment

Device	Manufacture	Model No	Serial No	Test Range	Calibration date	Calibration due date
2.0m integrating sphere	EVERFINE	R98	11010018	R98	2015-11-09	2016-11-08
High accuracy array spectroradiometer	EVERFINE	HAAS-2000	1012016T	380-780nm	2016-03-10	2017-03-09
DC Power Supply	EVERFINE	WY305-V1	1101047	30V/5A	2015-07-27	2016-07-26
Thermal Meter	Anymetre	JR900A	N/A	25°C	2016-01-12	2017-01-11
Standard Light Source	SENSING	N/A	LSD090808	N/A	2015-09-25	2016-09-24
AC Power Supply	EVERFINE	DPS1010-YF	1011001T	30V/5A	2016-03-04	2017-03-03
AC Power Supply	EVERFINE	VPS1030 PWM	1012017	0-150V, 0-300V	2016-03-04	2017-03-03
DC Power Supply	EVERFINE	WY12010	1009009	30V/5A	2016-03-04	2017-03-03
Power Meter	YOKOGAWA	WT-210	91KB35700	15/30/60/150/ 300/600 V	2016-03-04	2017-03-03
Goniophotometer	EVERFINE	GO-R5000	YG108492N10 120001	1600mm, 3000W/10A	2016-03-10	2017-03-09
Wireless Remote Sensor	N/A	433MHz	N/A	0°C~50°C; -20°C~60°C	2016-03-21	2017-03-20
Standard Light Source	EVERFINE	D908	1012003	N/A	2015-09-08	2016-09-07

Statement of Traceability: Bay Area Compliance Laboratories Corp. (Shenzhen) attested that all calibration has been performed using suitable standards traceable to National Primary Standards and International System of Units (SI).

## 4. Test Method

Product was tested with no seasoning. All stabilization and measurements were made in compliance with IES LM-79-08. The product was operated at rated voltage or at voltage required by manufacturer. The ambient temperature of the sample was maintained at  $25^{\circ}\text{C}\pm 1^{\circ}\text{C}$  during measurement. And relative humidity is less than 65%.

### **Integrating Sphere System**

The system includes AC power source, digital power meter, DC power supply, spectrophotometer, and integrating sphere. The integrating sphere system is calibrated by standard light source before measurement.

$4\pi$  geometry was used during measurement. The product was operated in its intended orientation in application and was recorded in this report.

The uncertainty of the light output (luminous flux) measurements is  $U=2.1\%$  ( $K=2$ ), at the 95% confidence level. The uncertainty of the correlated color temperature measurements is  $U=32\text{K}$  ( $K=2$ ), at the 95% confidence level. The uncertainty of the CRI is  $U=2.1$  ( $K=2$ ), at the 95% confidence level.

### **Goniophotometer System**

The goniophotometer system is calibrated by standard light source before measurement.

Type C goniophotometer was used for measuring total luminous flux, luminous intensity distribution, and color spatial uniformity. The product was operated in its intended orientation in application and was recorded in this report.

The uncertainty of the luminous intensity is  $U=1.6\%$  ( $K=2$ ), at the 95% confidence level.

## 5. Test Result

### [Integrating Sphere System]

Total operating time for integrating sphere test: **1.0 hour**

Test orientation: **Base up**

#### Electrical Measurement

Voltage (V)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
120.1	59.99	0.09279	10.42	0.9350

#### Photometric Measurement

Luminous Flux (lm)	Radiant Flux (W)	Efficacy (lm/W)	CCT (K)	Duv
709.97	2.4659	68.16	2956	0.00228


#### Chromaticity Coordinate

x	y	u	v	u'	v'
0.4367	0.3983	0.2529	0.3460	0.2529	0.5191

#### Color Rendering Index


<b>Ra</b>			
86.0			
R1 87	R2 98	R3 88	R4 86
R5 90	R6 96	R7 81	R8 62
R9 19	R10 98	R11 88	R12 85
R13 90	R14 93	R15 78	

Relative Spectral Power Distribution

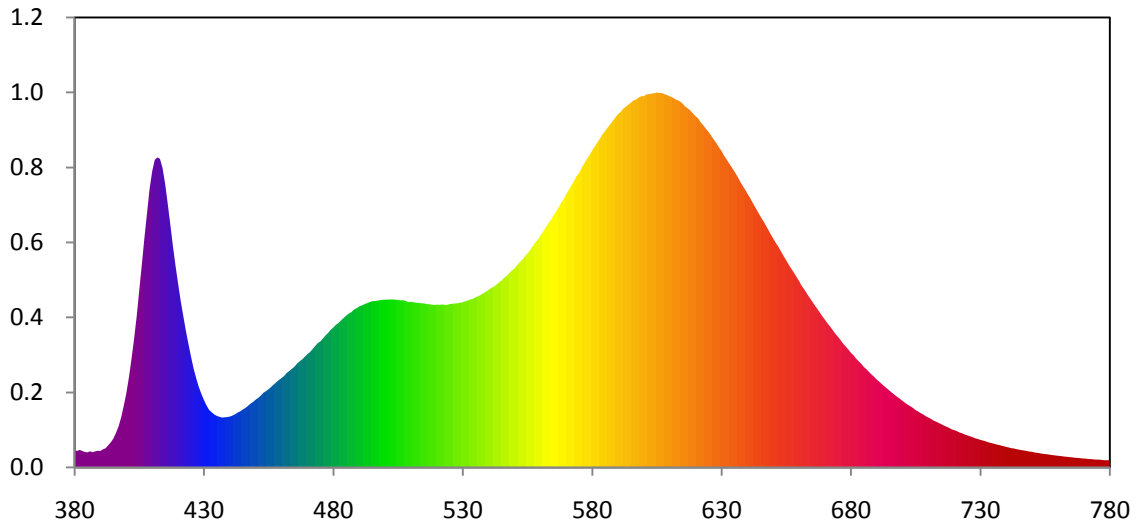


nm	mW	nm	mW	nm	mW	nm	mW	nm	mW
380	4.510E-02	465	2.689E-01	550	5.308E-01	635	7.893E-01	720	9.950E-02
385	4.030E-02	470	3.023E-01	555	5.706E-01	640	7.301E-01	725	8.560E-02
390	4.400E-02	475	3.361E-01	560	6.182E-01	645	6.700E-01	730	7.370E-02
395	7.710E-02	480	3.733E-01	565	6.711E-01	650	6.102E-01	735	6.390E-02
400	1.975E-01	485	4.050E-01	570	7.290E-01	655	5.525E-01	740	5.480E-02
405	4.718E-01	490	4.295E-01	575	7.854E-01	660	4.969E-01	745	4.750E-02
410	7.898E-01	495	4.434E-01	580	8.450E-01	665	4.430E-01	750	4.170E-02
415	7.569E-01	500	4.473E-01	585	8.970E-01	670	3.936E-01	755	3.570E-02
420	4.913E-01	505	4.466E-01	590	9.422E-01	675	3.485E-01	760	3.120E-02
425	2.961E-01	510	4.417E-01	595	9.727E-01	680	3.058E-01	765	2.730E-02
430	1.798E-01	515	4.376E-01	600	9.902E-01	685	2.681E-01	770	2.380E-02
435	1.375E-01	520	4.342E-01	605	1.000E+00	690	2.341E-01	775	2.100E-02
440	1.356E-01	525	4.356E-01	610	9.898E-01	695	2.044E-01	780	1.940E-02
445	1.546E-01	530	4.406E-01	615	9.701E-01	700	1.774E-01		
450	1.809E-01	535	4.539E-01	620	9.362E-01	705	1.529E-01		
455	2.090E-01	540	4.736E-01	625	8.946E-01	710	1.330E-01		
460	2.386E-01	545	4.985E-01	630	8.438E-01	715	1.151E-01		

CIE 1931 x y Chromaticity Diagram

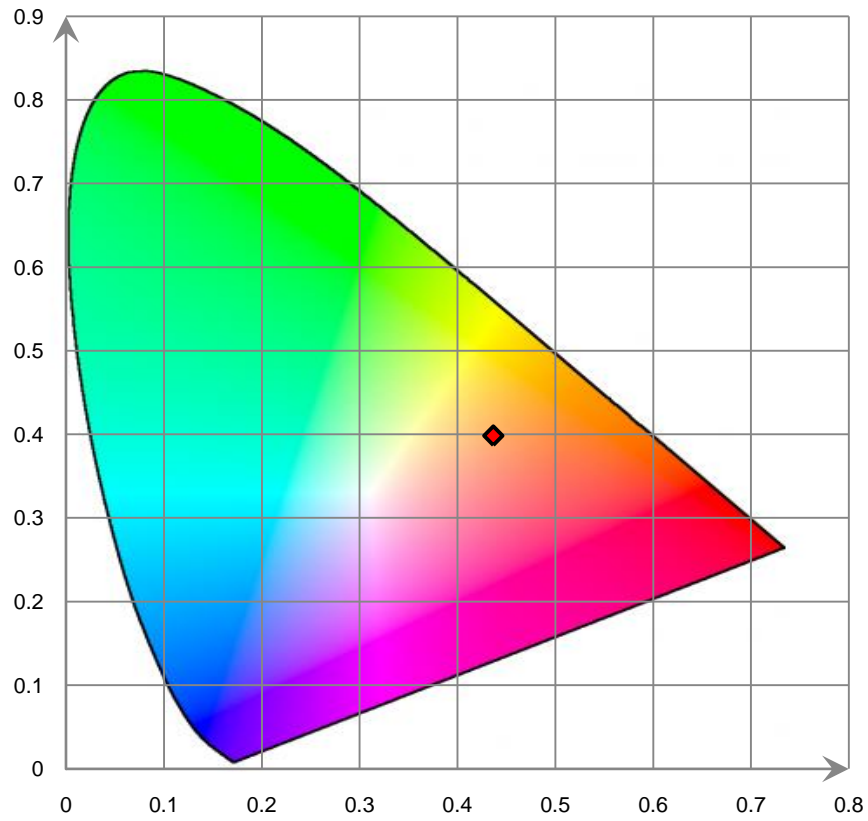

7-Step Chromaticity Quadrangles

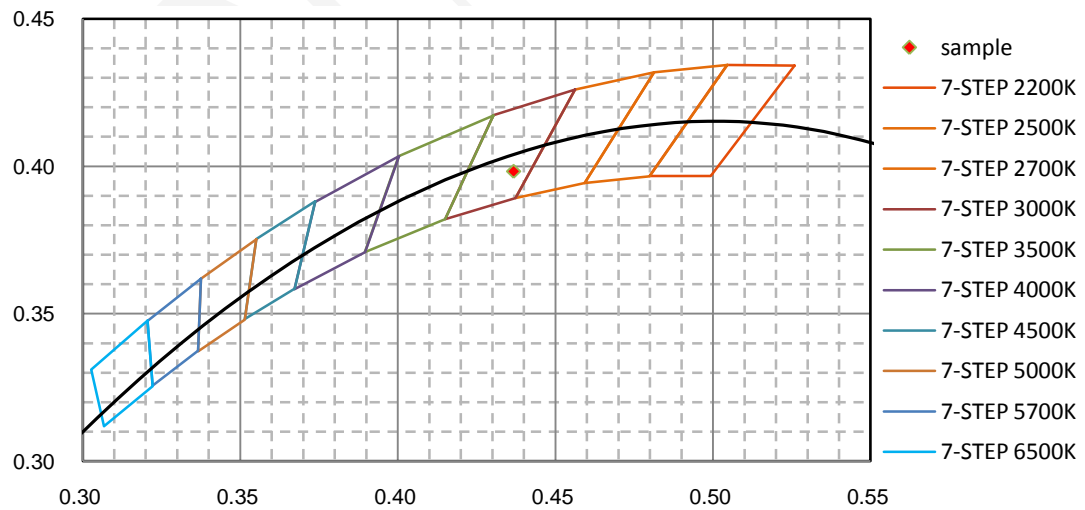

**[Goniophotometer System]**

Total operating time for luminous intensity distribution: **1.0 hour**

Test orientation: **Base up**


**Electrical Measurement**

Input Voltage (V)	Frequency (Hz)	Input Current (A)	Power (W)	Power Factor
120.02	60	0.0927	10.44	0.9384

**Photometric Measurement**

Luminous Flux (lm)	Efficacy (lm/W)	I <sub>max</sub> (cd)	S/MH (C0/180)	S/MH (C90/270)
721.77	69.14	1694	0.57	0.57

**Luminous Intensity Distribution**

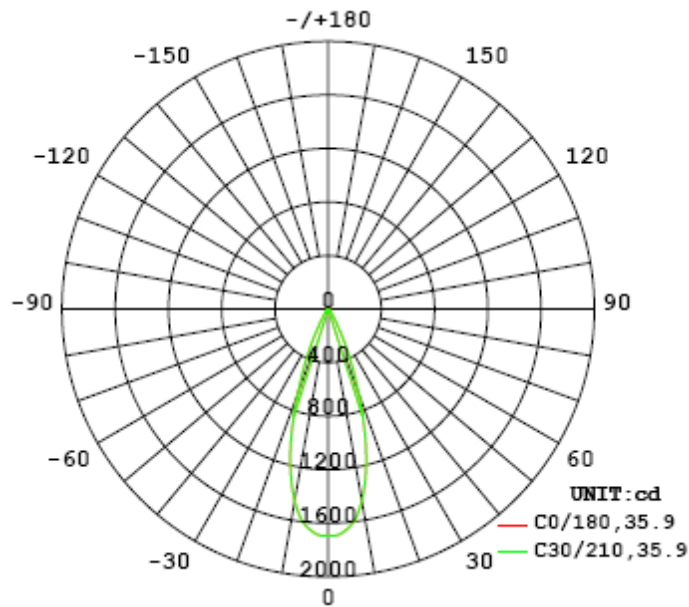

	C0/180	C45/225	C90/270	C135/315	AVG.
Beam Angle (50% I <sub>max</sub> ):	35.9	35.9	35.9	35.9	35.9
Field Angle (10% I <sub>max</sub> ):	58.1	58.1	58.1	58.1	58.1

Luminous Intensity (cd) Distribution Data

C y	0°	22.5°	45°	67.5°	90°	112.5°	135°	157.5°
0.0°	1687	1687	1687	1687	1687	1687	1687	1687
5.0°	1648	1648	1648	1648	1648	1648	1648	1648
10.0°	1456	1456	1456	1456	1456	1456	1456	1456
15.0°	1102	1102	1102	1102	1102	1102	1102	1102
20.0°	673	673	673	673	673	673	673	673
25.0°	343	343	343	343	343	343	343	343
30.0°	144	144	144	144	144	144	144	144
35.0°	70	70	70	70	70	70	70	70
40.0°	41	41	41	41	41	41	41	41
45.0°	30	30	30	30	30	30	30	30
50.0°	24	24	24	24	24	24	24	24
55.0°	21	21	21	21	21	21	21	21
60.0°	16	16	16	16	16	16	16	16
65.0°	13	13	13	13	13	13	13	13
70.0°	10	10	10	10	10	10	10	10
75.0°	6	6	6	6	6	6	6	6
80.0°	4	4	4	4	4	4	4	4
85.0°	2	2	2	2	2	2	2	2
90.0°	0	0	0	0	0	0	0	0
95.0°	0	0	0	0	0	0	0	0
100.0°	0	0	0	0	0	0	0	0
105.0°	0	0	0	0	0	0	0	0
110.0°	0	0	0	0	0	0	0	0
115.0°	0	0	0	0	0	0	0	0
120.0°	0	0	0	0	0	0	0	0
125.0°	0	0	0	0	0	0	0	0
130.0°	0	0	0	0	0	0	0	0
135.0°	0	0	0	0	0	0	0	0
140.0°	0	0	0	0	0	0	0	0
145.0°	0	0	0	0	0	0	0	0
150.0°	1	1	1	1	1	1	1	1
155.0°	1	1	1	1	1	1	1	1
160.0°	1	1	1	1	1	1	1	1
165.0°	1	1	1	1	1	1	1	1
170.0°	1	1	1	1	1	1	1	1
175.0°	1	1	1	1	1	1	1	1
180.0°	1	1	1	1	1	1	1	1




Luminous Intensity (cd) Distribution Data (cont.)

C y	180°	202.5°	225°	247.5°	270°	292.5°	315°	337.5°
0.0°	1687	1687	1687	1687	1687	1687	1687	1687
5.0°	1648	1648	1648	1648	1648	1648	1648	1648
10.0°	1456	1456	1456	1456	1456	1456	1456	1456
15.0°	1102	1102	1102	1102	1102	1102	1102	1102
20.0°	673	673	673	673	673	673	673	673
25.0°	343	343	343	343	343	343	343	343
30.0°	144	144	144	144	144	144	144	144
35.0°	70	70	70	70	70	70	70	70
40.0°	41	41	41	41	41	41	41	41
45.0°	30	30	30	30	30	30	30	30
50.0°	24	24	24	24	24	24	24	24
55.0°	21	21	21	21	21	21	21	21
60.0°	16	16	16	16	16	16	16	16
65.0°	13	13	13	13	13	13	13	13
70.0°	10	10	10	10	10	10	10	10
75.0°	6	6	6	6	6	6	6	6
80.0°	4	4	4	4	4	4	4	4
85.0°	2	2	2	2	2	2	2	2
90.0°	0	0	0	0	0	0	0	0
95.0°	0	0	0	0	0	0	0	0
100.0°	0	0	0	0	0	0	0	0
105.0°	0	0	0	0	0	0	0	0
110.0°	0	0	0	0	0	0	0	0
115.0°	0	0	0	0	0	0	0	0
120.0°	0	0	0	0	0	0	0	0
125.0°	0	0	0	0	0	0	0	0
130.0°	0	0	0	0	0	0	0	0
135.0°	0	0	0	0	0	0	0	0
140.0°	0	0	0	0	0	0	0	0
145.0°	0	0	0	0	0	0	0	0
150.0°	1	1	1	1	1	1	1	1
155.0°	1	1	1	1	1	1	1	1
160.0°	1	1	1	1	1	1	1	1
165.0°	1	1	1	1	1	1	1	1
170.0°	1	1	1	1	1	1	1	1
175.0°	1	1	1	1	1	1	1	1
180.0°	1	1	1	1	1	1	1	1

Average Area Illumination Figure

**Angle:35.9°. Flux out:393.9lm**

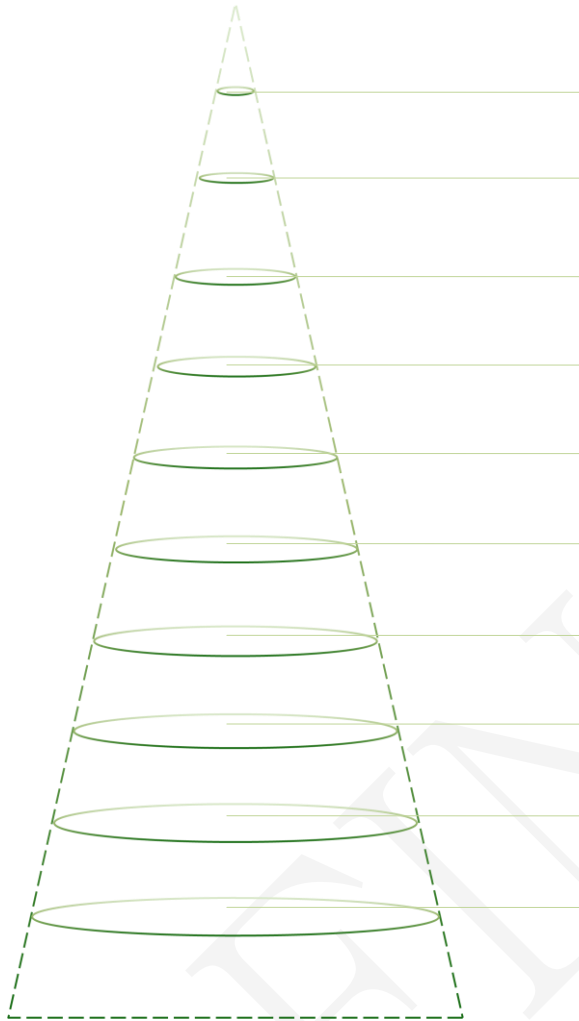

Height (m)	Diameter (cm)	E <sub>avg</sub> (lx)	E <sub>max</sub> (lx)
0.5	32.40	4750.0	6773.0
1.0	64.79	1188.0	1693.0
1.5	97.19	527.8	752.6
2.0	129.58	296.9	423.3
2.5	161.98	190.0	270.9
3.0	194.37	131.9	188.1
3.5	226.77	96.9	138.2
4.0	259.16	74.2	105.8
4.5	291.56	58.6	83.6
5.0	323.96	47.5	67.7

Zonal Lumen Density Measurement

Deg	Flux (lm)	%
0-5	40.0	5.55
5-10	111.5	15.44
10-15	151.7	21.02
15-20	144.6	20.04
20-25	103.4	14.33
25-30	58.0	8.03
30-35	29.4	4.08
35-40	17.8	2.47
40-45	12.7	1.75
45-50	10.8	1.50
50-55	9.8	1.36
55-60	8.5	1.18
60-65	7.0	0.97
65-70	5.9	0.82
70-75	4.1	0.57
75-80	2.8	0.39
80-85	1.7	0.24
85-90	0.7	0.10
90-95	0.0	0.00
95-100	0.0	0.00
100-105	0.0	0.00
105-110	0.0	0.00
110-115	0.0	0.00
115-120	0.0	0.00
120-125	0.0	0.00
125-130	0.0	0.01
130-135	0.0	0.00
135-140	0.1	0.01
140-145	0.1	0.01
145-150	0.2	0.02
150-155	0.2	0.03
155-160	0.2	0.03
160-165	0.2	0.02
165-170	0.1	0.02
170-175	0.1	0.01
175-180	0.0	0.00

Deg	Flux (lm)	%
0-5	40.0	5.55
0-10	151.5	20.99
0-15	303.2	42.01
0-20	447.8	62.05
0-25	551.3	76.38
0-30	609.3	84.41
0-35	638.7	88.49
0-40	656.5	90.96
0-45	669.2	92.71
0-50	680.0	94.21
0-55	689.8	95.57
0-60	698.3	96.75
0-65	705.3	97.72
0-70	711.2	98.54
0-75	715.3	99.11
0-80	718.1	99.50
0-85	719.9	99.74
0-90	720.6	99.84
0-95	720.6	99.84
0-100	720.6	99.84
0-105	720.6	99.84
0-110	720.6	99.84
0-115	720.6	99.84
0-120	720.6	99.84
0-125	720.6	99.84
0-130	720.7	99.85
0-135	720.7	99.85
0-140	720.7	99.86
0-145	720.8	99.87
0-150	721.0	99.89
0-155	721.2	99.92
0-160	721.4	99.95
0-165	721.6	99.97
0-170	721.7	99.99
0-175	721.8	100.00
0-180	721.8	100.00

Color Spatial Uniformity

**Average Weighted**  
**u': 0.2534 v': 0.5214**

$\gamma \setminus C0-180$	$u'$	$v'$	$Du'v'$	$\gamma \setminus C90-270$	$u'$	$v'$	$Du'v'$
-20	0.2535	0.5225	0.0011	-20	0.2538	0.5219	0.0006
-15	0.2532	0.5220	0.0006	-15	0.2535	0.5214	0.0001
-10	0.2537	0.5220	0.0007	-10	0.2534	0.5215	0.0001
-5	0.2539	0.5218	0.0006	-5	0.2531	0.5213	0.0003
0	0.2534	0.5211	0.0003	0	0.2534	0.5211	0.0003
5	0.2529	0.5206	0.0009	5	0.2534	0.5210	0.0004
10	0.2527	0.5207	0.0010	10	0.2534	0.5209	0.0005
15	0.2531	0.5210	0.0005	15	0.2536	0.5211	0.0004
20	0.2529	0.5208	0.0008	20	0.2531	0.5210	0.0005

FINAL

6. Product Photo



\*\*\*\*\*END OF REPORT\*\*\*\*\*