

Electric stacker with platform SPRINT



Why the SPRINT?

The SPRINT electric pallet truck with standing platform helps with storage in high racks and with heavy loads indoors. The robust design, the powerful lead-acid battery and the high-quality equipment ensure continuous use and easy handling.

- **Five options:** Lifting heights from 2.9 m to 5.3 m
- **Convenient ride-on thanks to standing platform** (forklift license required)
- Powerful 240 Ah **lead batteries** for long operating times
- Wear-free braking thanks to the **electromagnetic braking system**
- With **multifunction display** for battery status and operating hours overview



- With **free-lift function** so that the overall height does not change - ideal for low rooms or containers
- **High maneuverability** due to small size and steering radius
- **External charger included**
- Strong and efficient - even in the long term: that's why we offer our **Plus Guarantee for 5 years**

Technical data

Electric stacker sprint



OPTIONS Choose between

1 | 2 | 3 | 4 | 5

Lifting height (h3)	2900 3600 4300 4600 5300 m
Max. Total height (h4)	3380 4080 4780 5080 5780 mm
Min. total height (h1)	1958 2308 2008 2108 2343 mm
Free stroke (h2)	1410 1760 1420 1520 1756 mm

DIMENSIONS

Fork length	1150 mm	l
Width	790 mm	b1
Length	1896 mm	l1
Fork width outside	570 mm	b5
Ground clearance	28 mm	m2
Height from floor	90 mm	h13
Drawbar height	950 / 1300 mm	h14
Fork width single	180 mm	e
Load center	600 mm	c
Turning radius	1420 mm	Wa
Min. aisle width (EPAL1 Euro pallet)	2290 mm	Ast

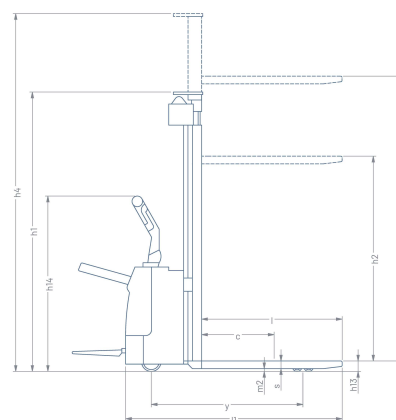

GENERAL

Load capacity	1600 kg
Drive type	Electric
Material	Steel
Travel speed, unloaded	6 km/h
Brake type	Electromagnetic
Sound pressure level according to EN 12053	65 db(A)

BATTERY

Battery type	Lead
Weight of the battery	200 kg

Battery capacity	240 Ah
Number of batteries	1
Battery level indicator	Yes
Operating time	4 hours
Battery voltage	24 V
Charger	External, included

LIFT

Type of lift	Electric hydraulic
Lifting speed, unloaded	0.19 m/s
Free lift	Yes
Engine power, Stroke	3.2 kW

TREATMENT

Tire material	Polyurethane (PU)
Castors	Tandem
Wide castors	70 mm
Diameter of the rollers	84 mm
Wide swivel castors	70 mm
Castor diameter	230 mm

We are constantly improving our products. For this reason, technical data may change without prior notice. Wear parts, rechargeable batteries and batteries are excluded from our manufacturer's "Plus Warranty" - details can be found in our warranty statement. The pallet truck complies with EU safety regulations.

Pictures

Electric stacker SPRINT



Why Pallit?

- Free delivery in 1-3 working days
- 100-day return policy
- First aid for technical issues for life
- On-site repair service available



Questions? Talk to our product experts.

📞 0800 - 000 96 25